



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = **859**

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = **837**

CPU2006 license: 9006


Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

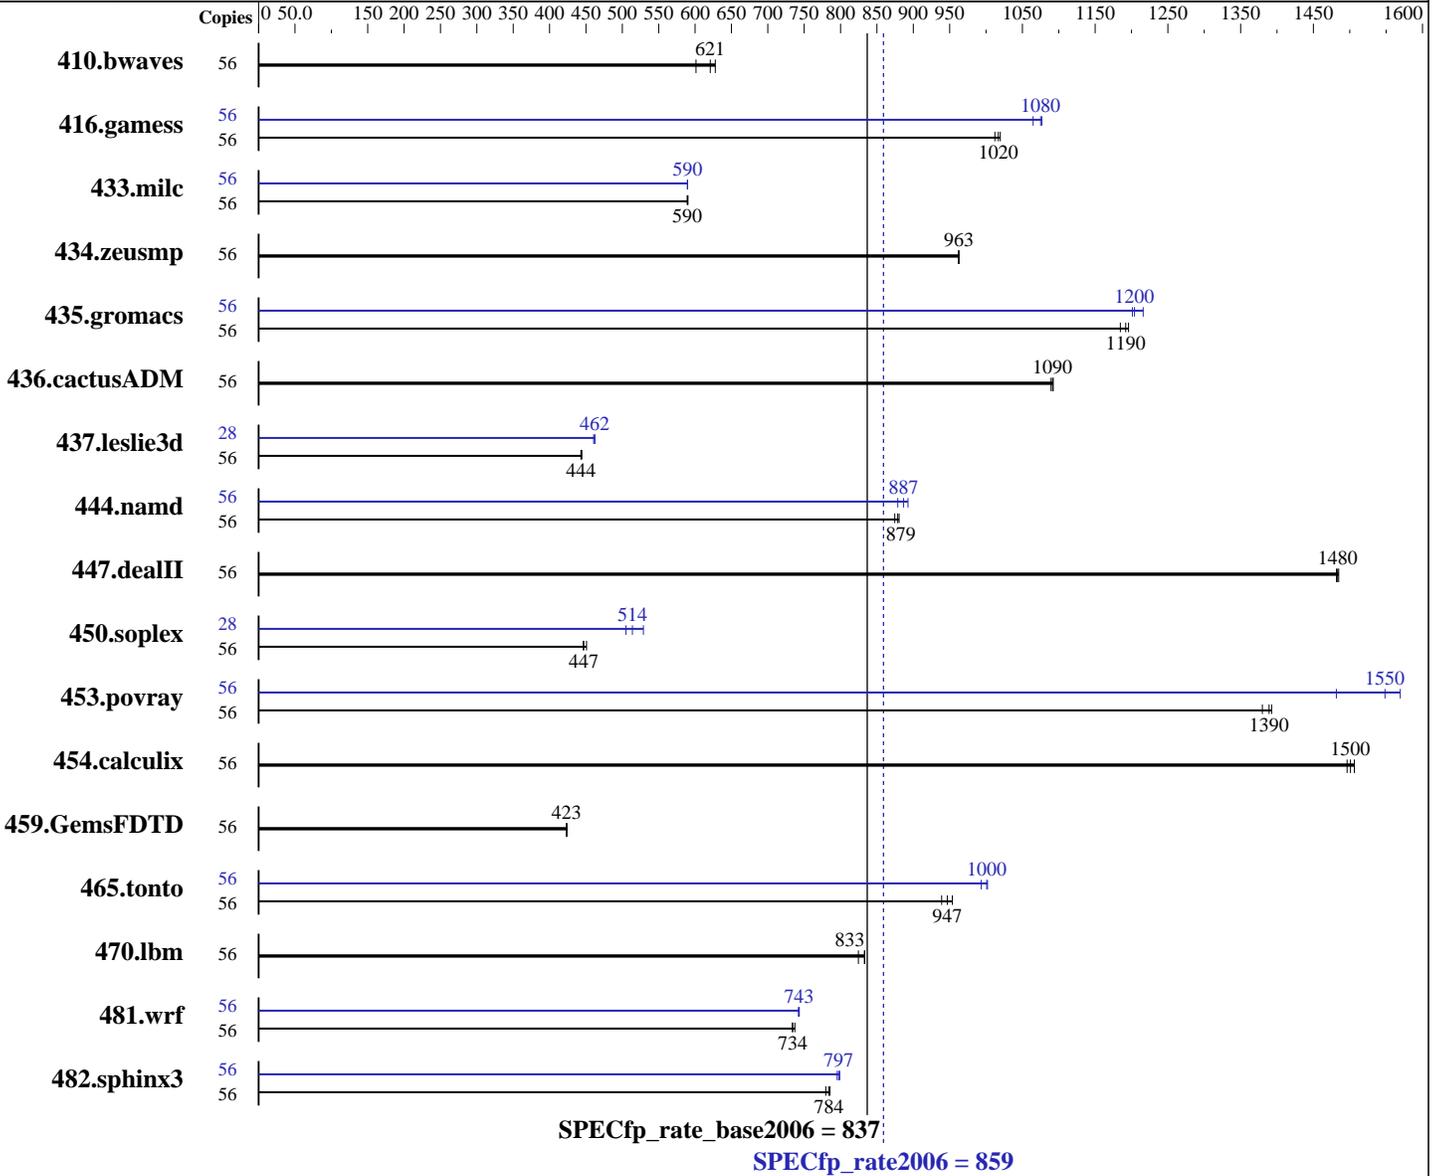

Hardware

CPU Name: Intel Xeon E5-2697 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.6 (Santiago)
 Kernel 2.6.32-504.el6.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = **859**

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = **837**

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: NEC Storage M100 via Fibre Channel
 (See additional details below)
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	56	1212	628	1266	601	1226	621	56	1212	628	1266	601	1226	621		
416.gamess	56	1078	1020	1075	1020	1083	1010	56	1018	1080	1020	1080	1030	1060		
433.milc	56	871	590	872	589	872	590	56	872	590	872	590	872	589		
434.zeusmp	56	530	962	529	963	529	963	56	530	962	529	963	529	963		
435.gromacs	56	338	1180	335	1190	334	1200	56	333	1200	329	1220	332	1200		
436.cactusADM	56	613	1090	613	1090	614	1090	56	613	1090	613	1090	614	1090		
437.leslie3d	56	1188	443	1185	444	1187	444	28	569	462	570	462	571	461		
444.namd	56	511	879	510	881	514	875	56	511	879	507	887	503	893		
447.dealII	56	432	1480	432	1480	431	1480	56	432	1480	432	1480	431	1480		
450.soplex	56	1036	451	1046	446	1045	447	28	462	505	454	514	441	529		
453.povray	56	216	1380	214	1390	214	1390	56	201	1480	192	1550	190	1570		
454.calculix	56	309	1500	307	1510	308	1500	56	309	1500	307	1510	308	1500		
459.GemsFDTD	56	1402	424	1404	423	1404	423	56	1402	424	1404	423	1404	423		
465.tonto	56	578	954	587	939	582	947	56	550	1000	551	1000	555	993		
470.lbm	56	933	825	924	833	924	833	56	933	825	924	833	924	833		
481.wrf	56	852	734	849	737	852	734	56	843	742	842	743	842	743		
482.sphinx3	56	1390	785	1392	784	1400	780	56	1372	795	1366	799	1369	797		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 859

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = 837

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Platform Notes

BIOS Settings:

Energy Performance: Performance
Patrol Scrub: Disabled
Cluster on Die: Enabled

Storage Configuration for Disk Subsystem:

NEC Storage M100 has 4 x 600 GB 10000 RPM SAS disks under RAID-10 configuration mounted over 8Gbps Fibre Channel interface with these options "defaults" in the /etc/fstab.

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 859

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = 837

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

482.sphinx3: icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 859

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = 837

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 859

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = 837

CPU2006 license: 9006

Test date: Jul-2015

Test sponsor: NEC Corporation

Hardware Availability: Jun-2015

Tested by: NEC Corporation

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-B120f-RevB.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 859

Express5800/B120f-h (Intel Xeon E5-2697 v3)

SPECfp_rate_base2006 = 837

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 25 17:52:48 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 August 2015.