



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ZTE

**SPECfp®\_rate2006 = 406**

### ATCA SBCR (Intel Xeon E5-2628L v2)

**SPECfp\_rate\_base2006 = 400**

CPU2006 license: 3834


Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

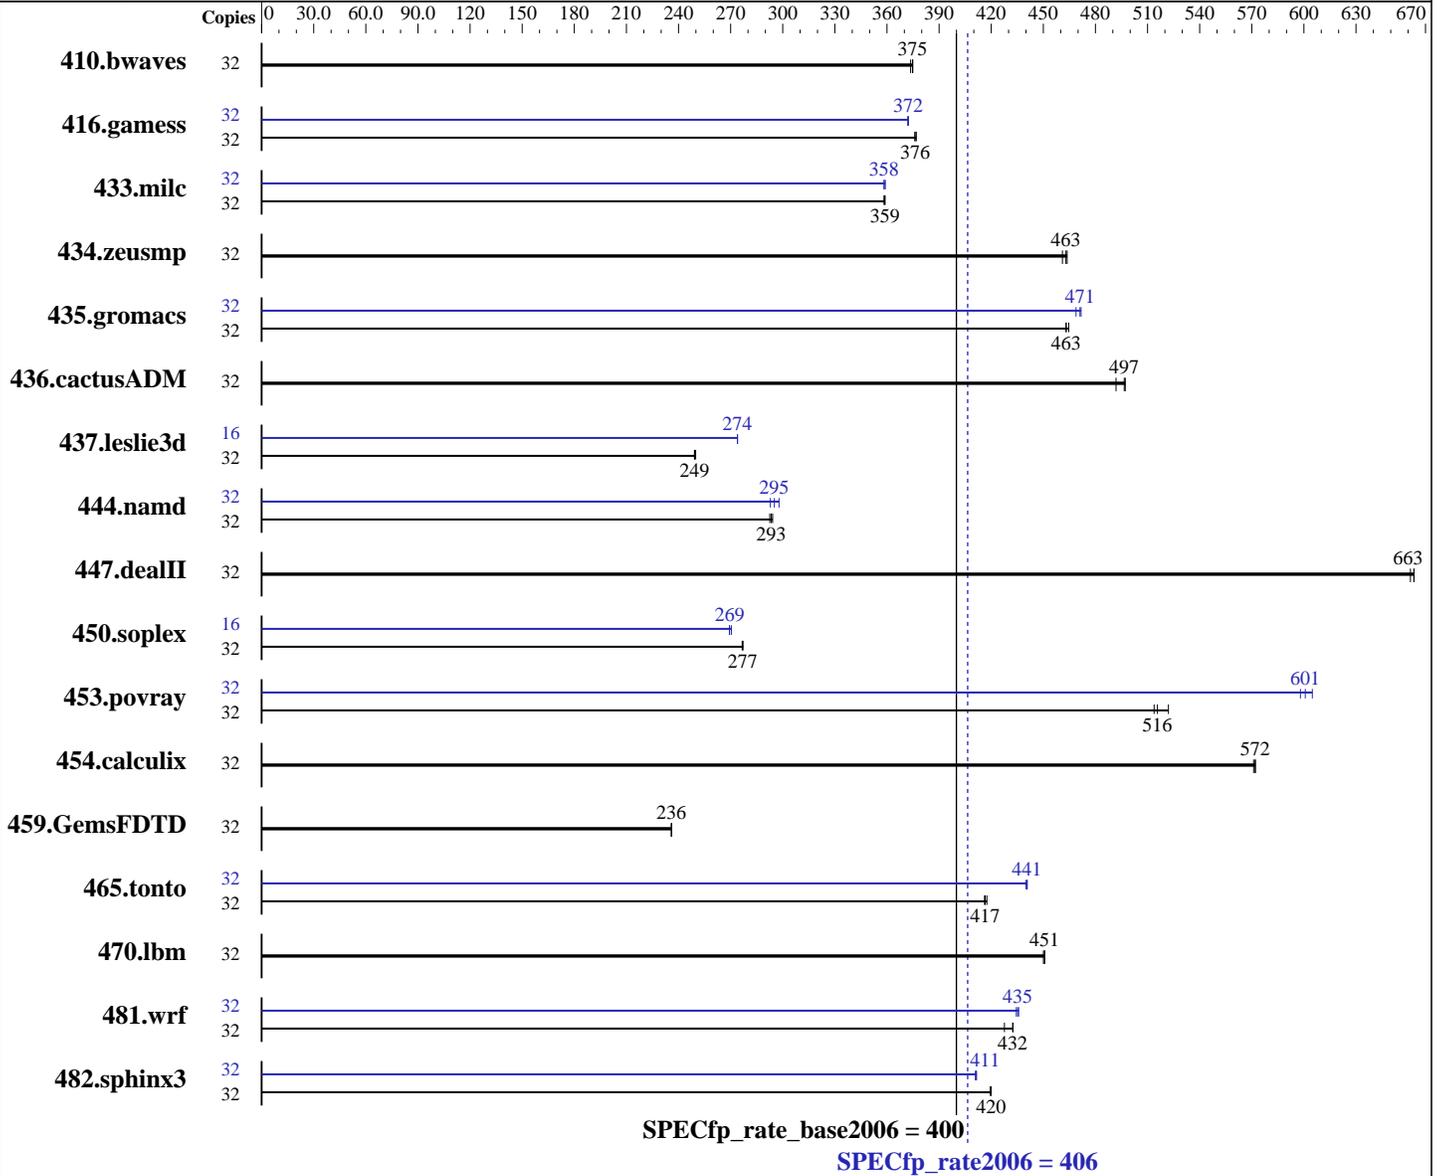

#### Hardware

CPU Name: Intel Xeon E5-2628L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 1900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 7.0(Maipo) 3.10.0-121.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ZTE

SPECfp\_rate2006 = **406**

### ATCA SBCR (Intel Xeon E5-2628L v2)

SPECfp\_rate\_base2006 = **400**

CPU2006 license: 3834  
Test sponsor: ZTE  
Tested by: ZTE

Test date: Aug-2015  
Hardware Availability: Sep-2013  
Software Availability: Sep-2014

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-10600R-9 ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1160	375	<u>1161</u>	<u>375</u>	1164	374	32	1160	375	<u>1161</u>	<u>375</u>	1164	374
416.gamess	32	1662	377	<u>1666</u>	<u>376</u>	1666	376	32	<u>1684</u>	<u>372</u>	1683	372	1684	372
433.milc	32	819	359	<u>819</u>	<u>359</u>	820	358	32	<u>820</u>	<u>358</u>	818	359	820	358
434.zeusmp	32	632	461	<u>629</u>	<u>463</u>	628	464	32	632	461	<u>629</u>	<u>463</u>	628	464
435.gromacs	32	<u>493</u>	<u>463</u>	493	463	492	465	32	<u>485</u>	<u>471</u>	487	469	484	472
436.cactusADM	32	769	497	<u>770</u>	<u>497</u>	777	492	32	769	497	<u>770</u>	<u>497</u>	777	492
437.leslie3d	32	1207	249	1204	250	<u>1207</u>	<u>249</u>	16	<u>549</u>	<u>274</u>	549	274	549	274
444.namd	32	877	293	872	294	<u>875</u>	<u>293</u>	32	876	293	<u>870</u>	<u>295</u>	862	298
447.dealII	32	554	661	552	663	<u>552</u>	<u>663</u>	32	554	661	552	663	<u>552</u>	<u>663</u>
450.soplex	32	963	277	<u>964</u>	<u>277</u>	965	277	16	496	269	<u>495</u>	<u>269</u>	493	270
453.povray	32	<u>330</u>	<u>516</u>	331	514	326	522	32	281	605	<u>283</u>	<u>601</u>	285	598
454.calculix	32	461	572	462	571	<u>462</u>	<u>572</u>	32	461	572	462	571	<u>462</u>	<u>572</u>
459.GemsFDTD	32	<u>1439</u>	<u>236</u>	1440	236	1438	236	32	<u>1439</u>	<u>236</u>	1440	236	1438	236
465.tonto	32	757	416	754	418	<u>756</u>	<u>417</u>	32	<u>715</u>	<u>441</u>	716	440	714	441
470.lbm	32	975	451	977	450	<u>976</u>	<u>451</u>	32	975	451	977	450	<u>976</u>	<u>451</u>
481.wrf	32	<u>827</u>	<u>432</u>	836	428	826	433	32	820	436	<u>821</u>	<u>435</u>	823	434
482.sphinx3	32	<u>1485</u>	<u>420</u>	1487	419	1485	420	32	1518	411	<u>1516</u>	<u>411</u>	1516	411

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Turbo boost Technology enabled  
Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECfp\_rate2006 = 406

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECfp\_rate\_base2006 = 400

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

## Platform Notes (Continued)

Hyper Threading Technology enabled  
 Sysinfo program /home/speccpu/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ 2b55956e7c0e338e808a36a21505f13a  
 running on localhost.localdomain Thu Aug 6 23:59:52 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2628L v2 @ 1.90GHZ
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 8
  siblings      : 16
  physical 0:   cores 0 1 2 3 4 5 6 7
  physical 1:   cores 0 1 2 3 4 5 6 7
cache size     : 20480 KB
```

```
From /proc/meminfo
MemTotal:      131796012 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-121.el7.x86_64 #1 SMP Tue Apr 8 10:48:19 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Aug 6 08:23

```
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  225G  47G  179G  21% /home
Additional information from dmidecode:
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ZTE

SPECfp\_rate2006 = 406

ATCA SBCR (Intel Xeon E5-2628L v2)

SPECfp\_rate\_base2006 = 400

CPU2006 license: 3834

Test sponsor: ZTE

Tested by: ZTE

Test date: Aug-2015

Hardware Availability: Sep-2013

Software Availability: Sep-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. CORE4.6.5\_UBF3.10.49\_SVN57833 05/06/2015

Memory:

8x Micron 36KSF2G72PZ-1 16 GB 2 rank 1333 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ZTE**

**SPECfp\_rate2006 = 406**

**ATCA SBCR (Intel Xeon E5-2628L v2)**

**SPECfp\_rate\_base2006 = 400**

**CPU2006 license:** 3834

**Test sponsor:** ZTE

**Tested by:** ZTE

**Test date:** Aug-2015

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2014

## Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ZTE**

**SPECfp\_rate2006 = 406**

**ATCA SBCR (Intel Xeon E5-2628L v2)**

**SPECfp\_rate\_base2006 = 400**

**CPU2006 license:** 3834

**Test sponsor:** ZTE

**Tested by:** ZTE

**Test date:** Aug-2015

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

```

482.sphinx3: -xAVX -prof-gen(pass 1) -ipo -O3 -no-prec-div
-opt-mem-layout-trans=3 -prof-use(pass 2) -unroll2

```

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ZTE**

**SPECfp\_rate2006 = 406**

**ATCA SBCR (Intel Xeon E5-2628L v2)**

**SPECfp\_rate\_base2006 = 400**

**CPU2006 license:** 3834

**Test sponsor:** ZTE

**Tested by:** ZTE

**Test date:** Aug-2015

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ZTE-Platform-Flags-V2.0.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Sep 8 22:40:45 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 September 2015.