



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint®\_rate2006 = 683

Lenovo Flex System x240 M5  
(Intel Xeon E5-2628L v3, 2.50 GHz)

SPECint\_rate\_base2006 = 661

CPU2006 license: 9017


Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

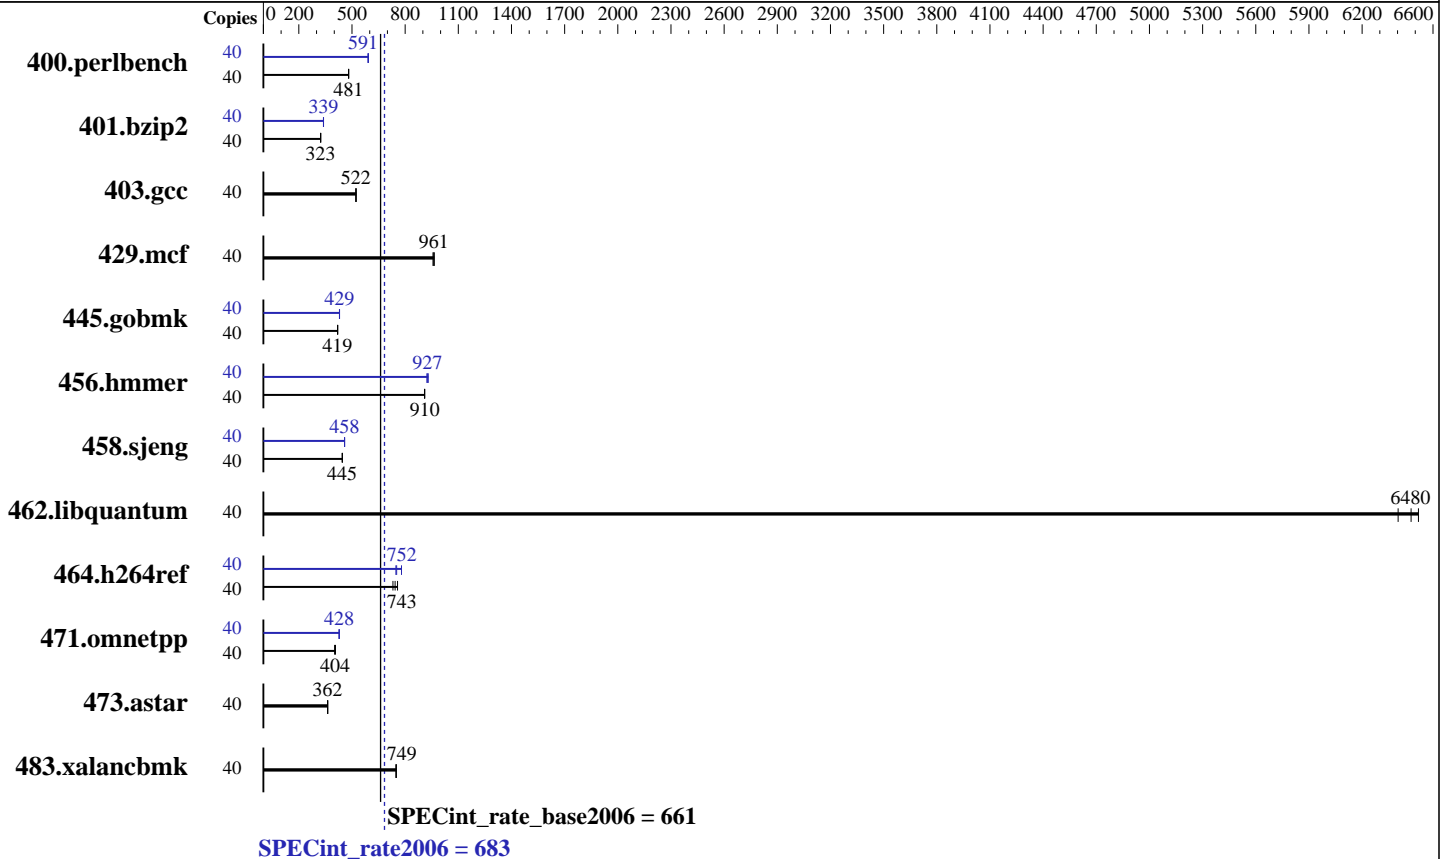

### Hardware

CPU Name: Intel Xeon E5-2628L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = **683**

Lenovo Flex System x240 M5  
(Intel Xeon E5-2628L v3, 2.50 GHz)

SPECint\_rate\_base2006 = 661

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<b>813</b>	<b>481</b>	811	482	814	480	40	661	591	659	593	<b>661</b>	<b>591</b>
401.bzip2	40	1195	323	1193	323	<b>1195</b>	<b>323</b>	40	<b>1138</b>	<b>339</b>	1139	339	1137	339
403.gcc	40	615	524	617	522	<b>617</b>	<b>522</b>	40	615	524	617	522	<b>617</b>	<b>522</b>
429.mcf	40	<b>380</b>	<b>961</b>	378	964	381	957	40	<b>380</b>	<b>961</b>	378	964	381	957
445.gobmk	40	1002	419	1000	420	<b>1002</b>	<b>419</b>	40	<b>977</b>	<b>429</b>	976	430	977	429
456.hammer	40	410	910	410	909	<b>410</b>	<b>910</b>	40	401	930	405	922	<b>403</b>	<b>927</b>
458.sjeng	40	1087	445	1086	446	<b>1086</b>	<b>445</b>	40	<b>1057</b>	<b>458</b>	1057	458	1056	459
462.libquantum	40	127	6520	129	6400	<b>128</b>	<b>6480</b>	40	127	6520	129	6400	<b>128</b>	<b>6480</b>
464.h264ref	40	1169	757	1211	731	<b>1191</b>	<b>743</b>	40	1136	779	<b>1177</b>	<b>752</b>	1184	748
471.omnetpp	40	<b>618</b>	<b>404</b>	622	402	615	407	40	<b>584</b>	<b>428</b>	584	428	585	428
473.astar	40	772	364	<b>775</b>	<b>362</b>	775	362	40	772	364	<b>775</b>	<b>362</b>	775	362
483.xalancbmk	40	368	750	369	749	<b>368</b>	<b>749</b>	40	368	750	369	749	<b>368</b>	<b>749</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Enabled COD Preference in BIOS  
Disable Early Snoop Preference in BIOS  
Sysinfo program /cpu2006.1.2\_14.0\_jan2014/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on newport-rhel6.5 Thu Aug 27 11:36:32 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2628L v3 @ 2.00GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 683

Lenovo Flex System x240 M5  
(Intel Xeon E5-2628L v3, 2.50 GHz)

SPECint\_rate\_base2006 = 661

CPU2006 license: 9017

Test date: Aug-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Dec-2014

Tested by: Lenovo Group Limited

Software Availability: Nov-2013

### Platform Notes (Continued)

```

caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
  cache size : 12800 KB

```

```

From /proc/meminfo
MemTotal:      264120276 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux newport-rhel6.5 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
2013 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 27 11:35 last=5

```

SPEC is set to: /cpu2006.1.2_14.0_jan2014
Filesystem                Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_newportrhel6-lv_root ext4      265G   87G  166G  35% /

```

```

Additional information from dmidecode:
BIOS IBM  -[C4E105JUS-1.10]- 04/11/2015
Memory:
 8x NO DIMM Unknown
16x Samsung M393A2G40DB0-CPB 16 GB 1867 MHz 2 rank

```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2\_14.0\_jan2014/libs/32:/cpu2006.1.2\_14.0\_jan2014/libs/64:/cpu2006.1.2\_14.0\_jan2014/sh"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 683**

Lenovo Flex System x240 M5  
(Intel Xeon E5-2628L v3, 2.50 GHz)

**SPECint\_rate\_base2006 = 661**

**CPU2006 license:** 9017

**Test date:** Aug-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 683**

Lenovo Flex System x240 M5  
(Intel Xeon E5-2628L v3, 2.50 GHz)

**SPECint\_rate\_base2006 = 661**

**CPU2006 license:** 9017

**Test date:** Aug-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 683**

Lenovo Flex System x240 M5  
(Intel Xeon E5-2628L v3, 2.50 GHz)

**SPECint\_rate\_base2006 = 661**

**CPU2006 license:** 9017

**Test date:** Aug-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Dec-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-BB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-BB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Oct 20 16:25:21 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 October 2015.