



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint®2006 = 65.3**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3


**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

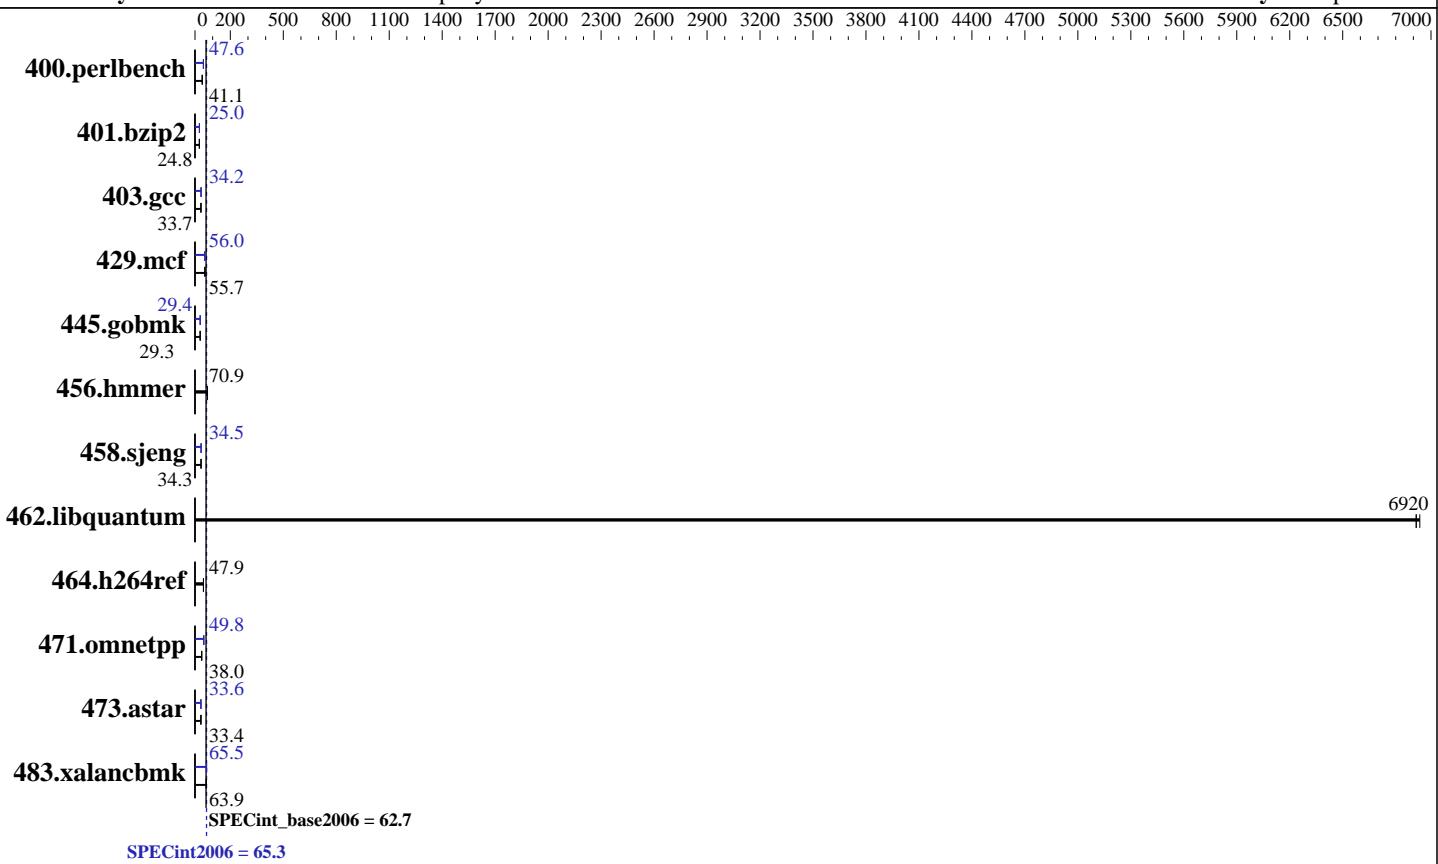

**SPECint2006 = 65.3**

### Hardware

CPU Name: Intel Xeon E5-2697 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: Kernel 3.10.0-123.el7.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint2006 = 65.3**

**SPECint\_base2006 = 62.7**

CPU2006 license: 3

Test date: Sep-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	238	41.1	<b>238</b>	<b>41.1</b>	239	41.0	<b>205</b>	<b>47.6</b>	<b>205</b>	<b>47.7</b>	<b>205</b>	<b>47.6</b>
401.bzip2	<b>390</b>	<b>24.8</b>	388	24.9	392	24.6	<b>386</b>	<b>25.0</b>	386	25.0	386	25.0
403.gcc	239	33.6	239	33.7	<b>239</b>	<b>33.7</b>	232	34.7	<b>236</b>	<b>34.2</b>	236	34.1
429.mcf	164	55.6	162	56.4	<b>164</b>	<b>55.7</b>	<b>163</b>	<b>56.0</b>	162	56.4	165	55.3
445.gobmk	357	29.4	358	29.3	<b>358</b>	<b>29.3</b>	356	29.4	<b>356</b>	<b>29.4</b>	357	29.4
456.hmmer	<b>132</b>	<b>70.9</b>	132	70.8	132	70.9	<b>132</b>	<b>70.9</b>	132	70.8	132	70.9
458.sjeng	353	34.3	352	34.3	<b>353</b>	<b>34.3</b>	351	34.5	350	34.5	<b>350</b>	<b>34.5</b>
462.libquantum	<b>3.00</b>	<b>6920</b>	3.00	6920	2.99	6940	<b>3.00</b>	<b>6920</b>	3.00	6920	2.99	6940
464.h264ref	463	47.8	461	48.0	<b>462</b>	<b>47.9</b>	463	47.8	461	48.0	<b>462</b>	<b>47.9</b>
471.omnetpp	164	38.1	<b>164</b>	<b>38.0</b>	166	37.6	125	49.9	126	49.7	<b>125</b>	<b>49.8</b>
473.astar	208	33.8	211	33.2	<b>210</b>	<b>33.4</b>	208	33.7	<b>209</b>	<b>33.6</b>	210	33.4
483.xalancbmk	<b>108</b>	<b>63.9</b>	108	64.1	108	63.8	<b>105</b>	<b>65.5</b>	105	65.6	105	65.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

BIOS Configuration:

Intel Hyperthreading Options set to Disabled

HP Power Profile set to Custom

HP Power Regulator set to HP Static High Performance Mode

Minimum Processor Idle Power Core State set to C6 State

Minimum Processor Idle Power Package State set to No Package State

Energy/Performance Bias set to Maximum Performance

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Early Snoop

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Sysinfo program /cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on BL460c.Gen9-CPU2006 Tue Sep 29 03:45:40 2015

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint2006 = 65.3**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
        2 "physical id"s (chips)
        28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 14
siblings : 14
physical 0: cores 0 2 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 2 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB
```

```
From /proc/meminfo
MemTotal:      263845320 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux BL460c.Gen9-CPU2006 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT
2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 29 03:44
```

```
SPEC is set to: /cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   368G  6.6G  361G   2% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint2006 = 65.3**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Platform Notes (Continued)

BIOS HP I36 05/06/2015

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2133 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/cpu2006/lib32:/cpu2006/lib64:/cpu2006/sh"

OMP\_NUM\_THREADS = "28"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint2006 = 65.3**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint2006 = 65.3**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-prefetch -ansi-alias
```

```
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias
```

```
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32
```

```
429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
           -opt-prefetch -auto-p32
```

```
445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
            -ansi-alias
```

```
456.hmmr: basepeak = yes
```

```
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -unroll14
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -opt-ra-region-strategy=block -ansi-alias
               -Wl,-z,muldefs -L/sh -lsmartheap
```

```
473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64
```

```
483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
                -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECint2006 = 65.3**

**SPECint\_base2006 = 62.7**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 20 16:26:00 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 October 2015.