



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 677

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

SPECint\_rate\_base2006 = 648

CPU2006 license: 3


Test date: Sep-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

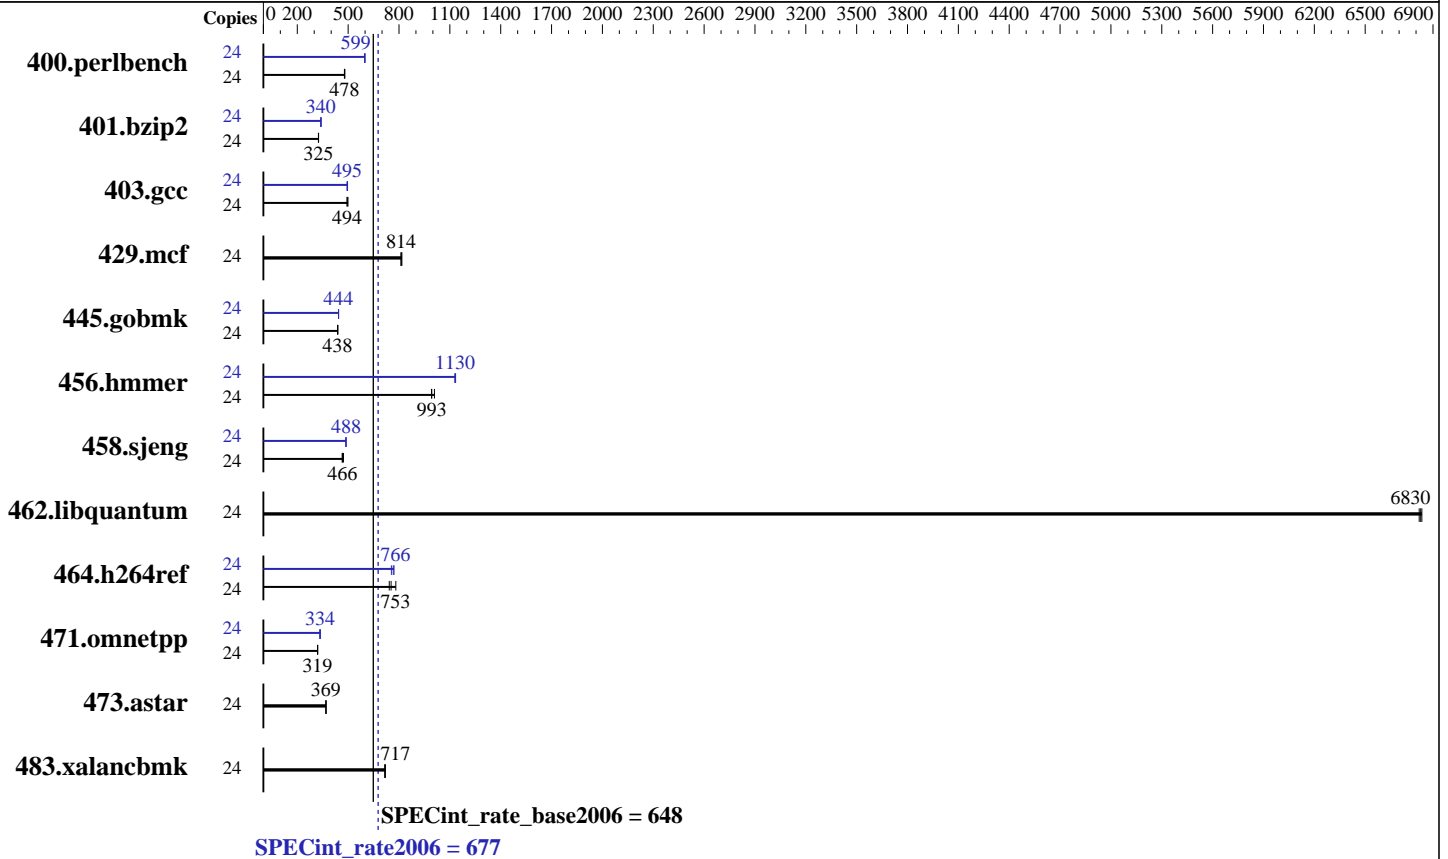

### Hardware

CPU Name: Intel Xeon E5-2643 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2133P-R)  
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 677

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

SPECint\_rate\_base2006 = 648

CPU2006 license: 3

Test date: Sep-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>490</b>	<b>478</b>	488	481	490	478	24	<b>392</b>	<b>599</b>	392	598	391	599
401.bzip2	24	<b>712</b>	<b>325</b>	712	325	713	325	24	<b>682</b>	<b>340</b>	681	340	683	339
403.gcc	24	387	499	391	494	<b>391</b>	<b>494</b>	24	<b>390</b>	<b>495</b>	389	497	391	494
429.mcf	24	270	811	<b>269</b>	<b>814</b>	268	817	24	270	811	<b>269</b>	<b>814</b>	268	817
445.gobmk	24	573	439	575	438	<b>575</b>	<b>438</b>	24	567	444	568	443	<b>568</b>	<b>444</b>
456.hammer	24	226	992	222	1010	<b>225</b>	<b>993</b>	24	<b>198</b>	<b>1130</b>	198	1130	197	1130
458.sjeng	24	615	473	624	465	<b>623</b>	<b>466</b>	24	595	488	597	487	<b>596</b>	<b>488</b>
462.libquantum	24	72.9	6820	<b>72.8</b>	<b>6830</b>	72.8	6830	24	72.9	6820	<b>72.8</b>	<b>6830</b>	72.8	6830
464.h264ref	24	715	743	680	781	<b>705</b>	<b>753</b>	24	703	755	<b>693</b>	<b>766</b>	689	771
471.omnetpp	24	<b>470</b>	<b>319</b>	470	319	467	321	24	<b>449</b>	<b>334</b>	447	336	450	333
473.astar	24	456	369	<b>456</b>	<b>369</b>	456	369	24	456	369	<b>456</b>	<b>369</b>	456	369
483.xalancbmk	24	231	716	230	720	<b>231</b>	<b>717</b>	24	231	716	230	720	<b>231</b>	<b>717</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
HP Power Regulator set to HP Static High Performance Mode  
Minimum Processor Idle Power Core State set to C6 State  
Minimum Processor Idle Power Package State set to No Package State  
Energy/Performance Bias set to Maximum Performance  
Collaborative Power Control set to Disabled  
QPI Snoop Configuration set to Early Snoop  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 677

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

SPECint\_rate\_base2006 = 648

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015  
**Hardware Availability:** May-2015  
**Software Availability:** Sep-2014

### Platform Notes (Continued)

Sysinfo program /cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on BL460c.Gen9-CPU2006 Thu Sep 24 09:00:19 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2643 v3 @ 3.40GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 6
siblings       : 12
physical 0:    cores 0 1 2 3 4 5
physical 1:    cores 0 1 2 3 4 5
cache size     : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263845784 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux BL460c.Gen9-CPU2006 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 24 09:00

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs  368G  6.6G  361G   2% /
Additional information from dmidecode:
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 677**

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

**SPECint\_rate\_base2006 = 648**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I36 05/06/2015

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2133 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 677**

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

**SPECint\_rate\_base2006 = 648**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 677**

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

**SPECint\_rate\_base2006 = 648**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(3.40 GHz, Intel Xeon E5-2643 v3)

SPECint\_rate2006 = 677

SPECint\_rate\_base2006 = 648

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Oct 20 16:26:22 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 October 2015.