



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp®\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

CPU2006 license: 3


Test date: Sep-2015

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2015

Tested by: Hewlett-Packard Company

Software Availability: Sep-2014

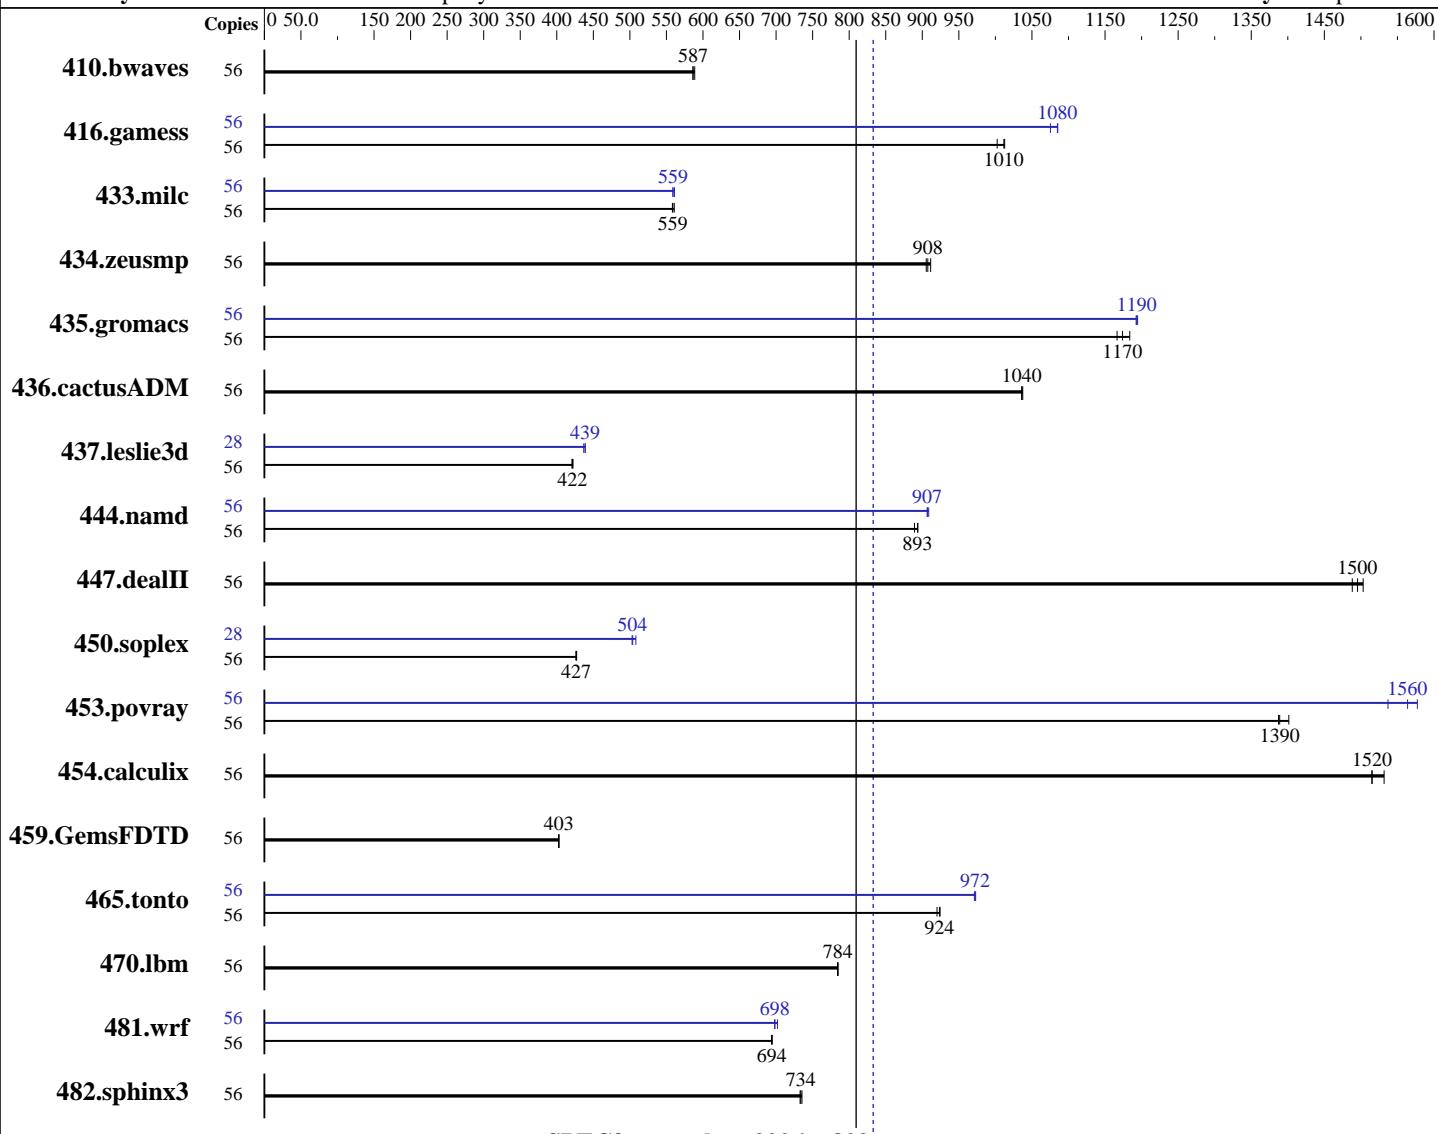

**SPECfp\_rate\_base2006 = 809**

**SPECfp\_rate2006 = 833**

### Hardware

CPU Name: Intel Xeon E5-2697 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
Compiler: Kernel 3.10.0-123.el7.x86\_64  
C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1298	586	<u>1298</u>	<u>587</u>	1293	589	56	1298	586	<u>1298</u>	<u>587</u>	1293	589
416.gamess	56	1083	1010	1094	1000	<u>1084</u>	<u>1010</u>	56	1010	1090	<u>1011</u>	<u>1080</u>	1020	1080
433.milc	56	921	558	917	561	<u>920</u>	<u>559</u>	56	920	559	<u>920</u>	<u>559</u>	916	561
434.zeusmp	56	559	911	563	905	<u>562</u>	<u>908</u>	56	559	911	<u>563</u>	<u>905</u>	<u>562</u>	<u>908</u>
435.gromacs	56	343	1170	338	1180	<u>341</u>	<u>1170</u>	56	335	1190	335	1190	<u>335</u>	<u>1190</u>
436.cactusADM	56	<u>646</u>	<u>1040</u>	645	1040	646	1040	56	<u>646</u>	<u>1040</u>	645	1040	646	1040
437.leslie3d	56	1247	422	<u>1248</u>	<u>422</u>	1251	421	28	603	437	600	439	<u>600</u>	<u>439</u>
444.namd	56	<u>503</u>	<u>893</u>	502	894	505	889	56	494	909	495	907	<u>495</u>	<u>907</u>
447.dealII	56	430	1490	<u>428</u>	<u>1500</u>	426	1500	56	430	1490	<u>428</u>	<u>1500</u>	426	1500
450.soplex	56	<u>1095</u>	<u>427</u>	1093	427	1096	426	28	460	508	<u>464</u>	<u>504</u>	464	503
453.povray	56	215	1390	213	1400	<u>214</u>	<u>1390</u>	56	189	1580	<u>191</u>	<u>1560</u>	194	1540
454.calculix	56	<u>305</u>	<u>1520</u>	302	1530	305	1520	56	<u>305</u>	<u>1520</u>	302	1530	305	1520
459.GemsFDTD	56	<u>1476</u>	<u>403</u>	1474	403	1477	402	56	<u>1476</u>	<u>403</u>	1474	403	1477	402
465.tonto	56	<u>597</u>	<u>924</u>	596	924	599	920	56	<u>567</u>	<u>972</u>	566	973	567	971
470.lbm	56	<u>981</u>	<u>784</u>	981	784	980	785	56	<u>981</u>	<u>784</u>	981	784	980	785
481.wrf	56	900	695	902	694	<u>901</u>	<u>694</u>	56	<u>896</u>	<u>698</u>	891	702	896	698
482.sphinx3	56	1489	733	<u>1487</u>	<u>734</u>	1484	735	56	<u>1489</u>	<u>733</u>	<u>1487</u>	<u>734</u>	1484	735

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett-Packard Company ProLiant BL460c Gen9 (2.60 GHz, Intel Xeon E5-2697 v3)	<b>SPECfp_rate2006 = 833</b>
	<b>SPECfp_rate_base2006 = 809</b>
<b>CPU2006 license:</b> 3	<b>Test date:</b> Sep-2015
<b>Test sponsor:</b> Hewlett-Packard Company	<b>Hardware Availability:</b> May-2015
<b>Tested by:</b> Hewlett-Packard Company	<b>Software Availability:</b> Sep-2014

## Platform Notes

### BIOS Configuration:

HP Power Profile set to Custom  
 HP Power Regulator set to HP Static High Performance Mode  
 Minimum Processor Idle Power Core State set to C6 State  
 Minimum Processor Idle Power Package State set to No Package State  
 Energy/Performance Bias set to Maximum Performance  
 Collaborative Power Control set to Disabled  
 QPI Snoop Configuration set to Cluster on Die  
 Thermal Configuration set to Maximum Cooling  
 Processor Power and Utilization Monitoring set to Disabled  
 Memory Refresh Rate set to 1x Refresh

Sysinfo program /cpu2006/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
 running on BL460c.Gen9-CPU2006 Wed Sep 30 01:03:51 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz
        2 "physical id"s (chips)
        56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 7
        siblings : 14
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      263841564 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

## Platform Notes (Continued)

uname -a:

```
Linux BL460c.Gen9-CPU2006 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT
2014 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 29 13:47

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	368G	55G	314G	15%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I36 05/06/2015

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2133 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2133 MHz

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/lib64:/cpu2006/lib32:/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2015

Hardware Availability: May-2015

Software Availability: Sep-2014

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
    -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
    -O3(pass 2) -no-prec-div(pass 2)
    -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
    -auto-ilp32

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Sep-2015

**Hardware Availability:** May-2015

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL460c Gen9  
(2.60 GHz, Intel Xeon E5-2697 v3)

**SPECfp\_rate2006 = 833**

**SPECfp\_rate\_base2006 = 809**

**CPU2006 license:** 3

**Test date:** Sep-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** May-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Oct 20 16:26:24 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 October 2015.