



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp<sup>®</sup>\_rate2006 = 126

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate\_base2006 = 123

CPU2006 license: 9017


Test date: Sep-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

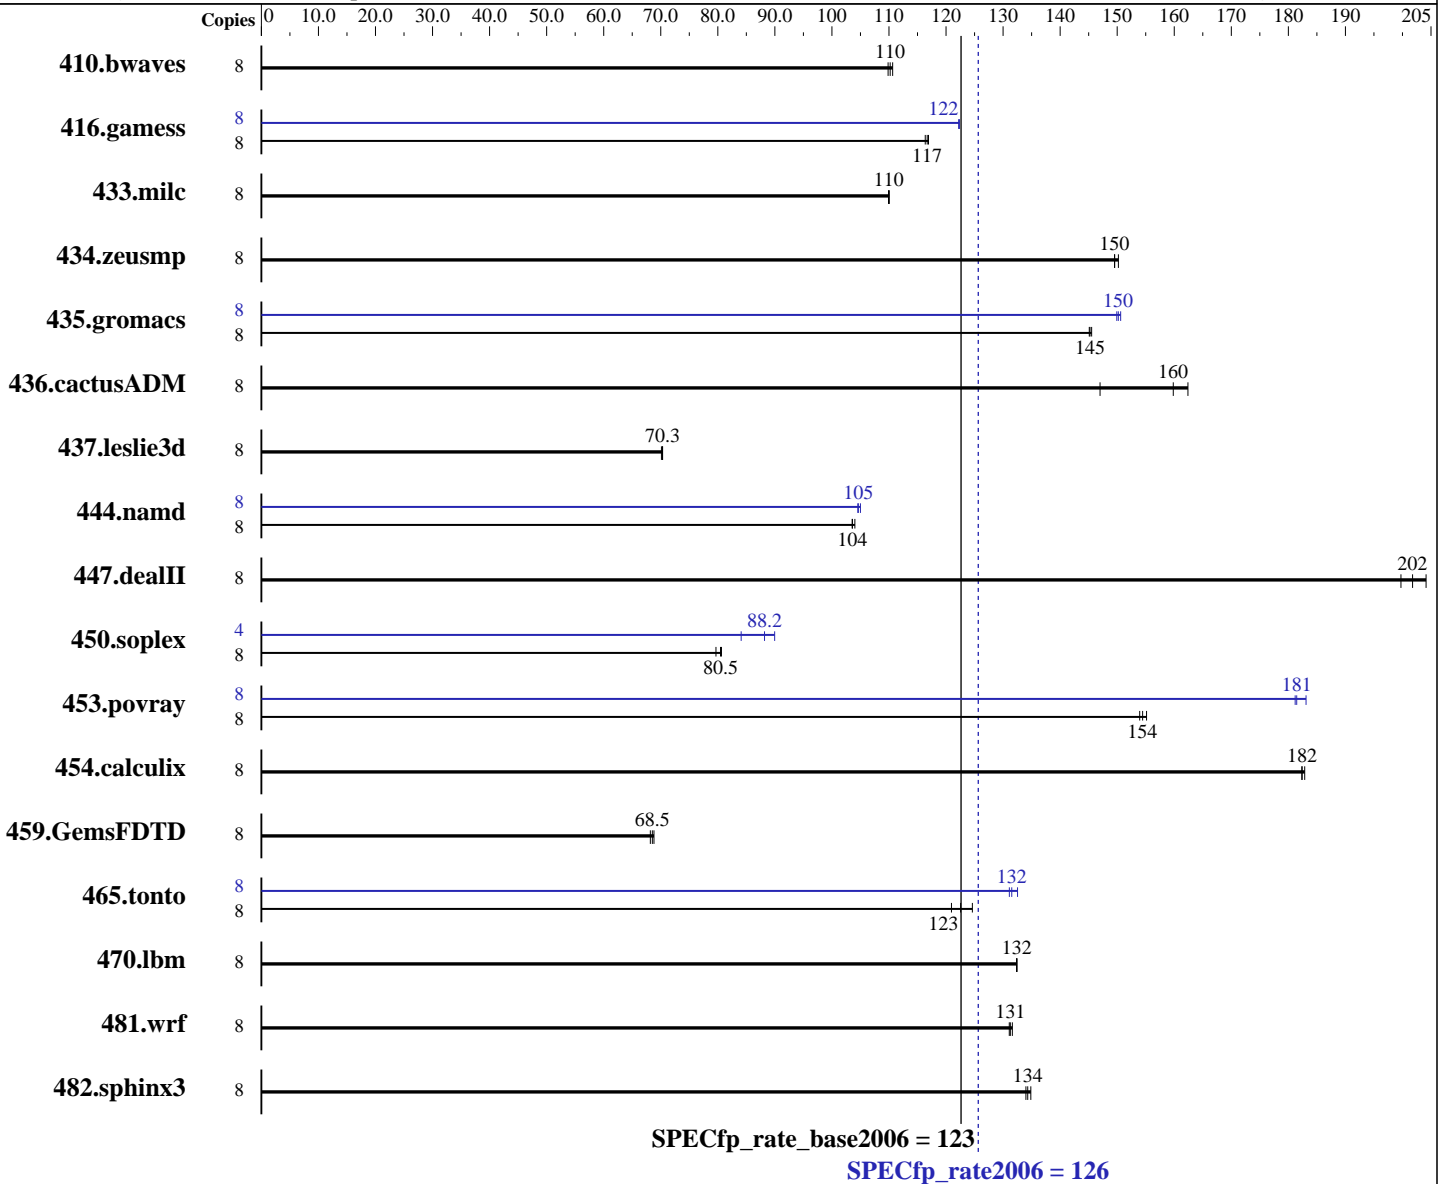

### Hardware

CPU Name: Intel Xeon E3-1240L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 126

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate\_base2006 = 123

CPU2006 license: 9017

Test date: Sep-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 2Rx8 PC3L-12800E-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	983	111	990	110	<b>986</b>	<b>110</b>	8	983	111	990	110	<b>986</b>	<b>110</b>
416.gamess	8	1340	117	1346	116	<b>1342</b>	<b>117</b>	8	1281	122	<b>1281</b>	<b>122</b>	1281	122
433.milc	8	667	110	<b>668</b>	<b>110</b>	668	110	8	667	110	<b>668</b>	<b>110</b>	668	110
434.zeusmp	8	<b>487</b>	<b>150</b>	485	150	487	150	8	<b>487</b>	<b>150</b>	485	150	487	150
435.gromacs	8	<b>393</b>	<b>145</b>	393	146	394	145	8	<b>380</b>	<b>150</b>	381	150	379	151
436.cactusADM	8	589	162	<b>598</b>	<b>160</b>	650	147	8	589	162	<b>598</b>	<b>160</b>	650	147
437.leslie3d	8	<b>1070</b>	<b>70.3</b>	1069	70.3	1073	70.1	8	<b>1070</b>	<b>70.3</b>	1069	70.3	1073	70.1
444.namd	8	617	104	<b>619</b>	<b>104</b>	620	104	8	611	105	614	105	<b>613</b>	<b>105</b>
447.dealII	8	<b>454</b>	<b>202</b>	448	204	458	200	8	<b>454</b>	<b>202</b>	448	204	458	200
450.soplex	8	<b>829</b>	<b>80.5</b>	837	79.7	827	80.6	4	397	84.1	371	90.0	<b>378</b>	<b>88.2</b>
453.povray	8	276	154	274	155	<b>276</b>	<b>154</b>	8	232	183	235	181	<b>235</b>	<b>181</b>
454.calculix	8	362	182	<b>362</b>	<b>182</b>	361	183	8	362	182	<b>362</b>	<b>182</b>	361	183
459.GemsFDTD	8	1245	68.2	<b>1239</b>	<b>68.5</b>	1234	68.8	8	1245	68.2	<b>1239</b>	<b>68.5</b>	1234	68.8
465.tonto	8	651	121	<b>642</b>	<b>123</b>	632	125	8	600	131	<b>599</b>	<b>132</b>	594	133
470.lbm	8	<b>830</b>	<b>132</b>	831	132	830	132	8	<b>830</b>	<b>132</b>	831	132	830	132
481.wrf	8	679	132	682	131	<b>681</b>	<b>131</b>	8	679	132	682	131	<b>681</b>	<b>131</b>
482.sphinx3	8	1164	134	<b>1161</b>	<b>134</b>	1156	135	8	1164	134	<b>1161</b>	<b>134</b>	1156	135

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:  
Hyper-Threading set to Enable  
Operating Mode set to "Efficiency-Favor Performance"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 126

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate\_base2006 = 123

CPU2006 license: 9017

Test date: Sep-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

### Platform Notes (Continued)

Sysinfo program /root/cpu2006\_ic16/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on x3100m5.labs.lenovo.com Thu Sep 24 00:32:41 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1240L v3 @ 2.00GHz
 1 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      16100784 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux x3100m5.labs.lenovo.com 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29
18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 23 12:18

SPEC is set to: /root/cpu2006\_ic16

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   50G   49G  1.6G  97% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 126

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate\_base2006 = 123

CPU2006 license: 9017

Test date: Sep-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

### Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[J9E113LUS-1.05]- 07/06/2014

Memory:

4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 2 rank 1600 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006\_ic16/libs/32:/root/cpu2006\_ic16/libs/64:/root/cpu2006\_ic16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 126**

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

**SPECfp\_rate\_base2006 = 123**

**CPU2006 license:** 9017

**Test date:** Sep-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Base Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp\_rate2006 = 126

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate\_base2006 = 123

CPU2006 license: 9017

Test date: Sep-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

## Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -prof-use(pass 2)
          -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
          -ansi-alias

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp\_rate2006 = 126

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate\_base2006 = 123

CPU2006 license: 9017

Test date: Sep-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml>



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1240L v3, 3.00 GHz)

SPECfp\_rate2006 = 126

SPECfp\_rate\_base2006 = 123

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Sep-2015

**Hardware Availability:** May-2014

**Software Availability:** Jun-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Nov 3 11:55:51 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 November 2015.