



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 2120

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

SPECint_rate_base2006 = 2040

CPU2006 license: 3175


Test date: Sep-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Oct-2014

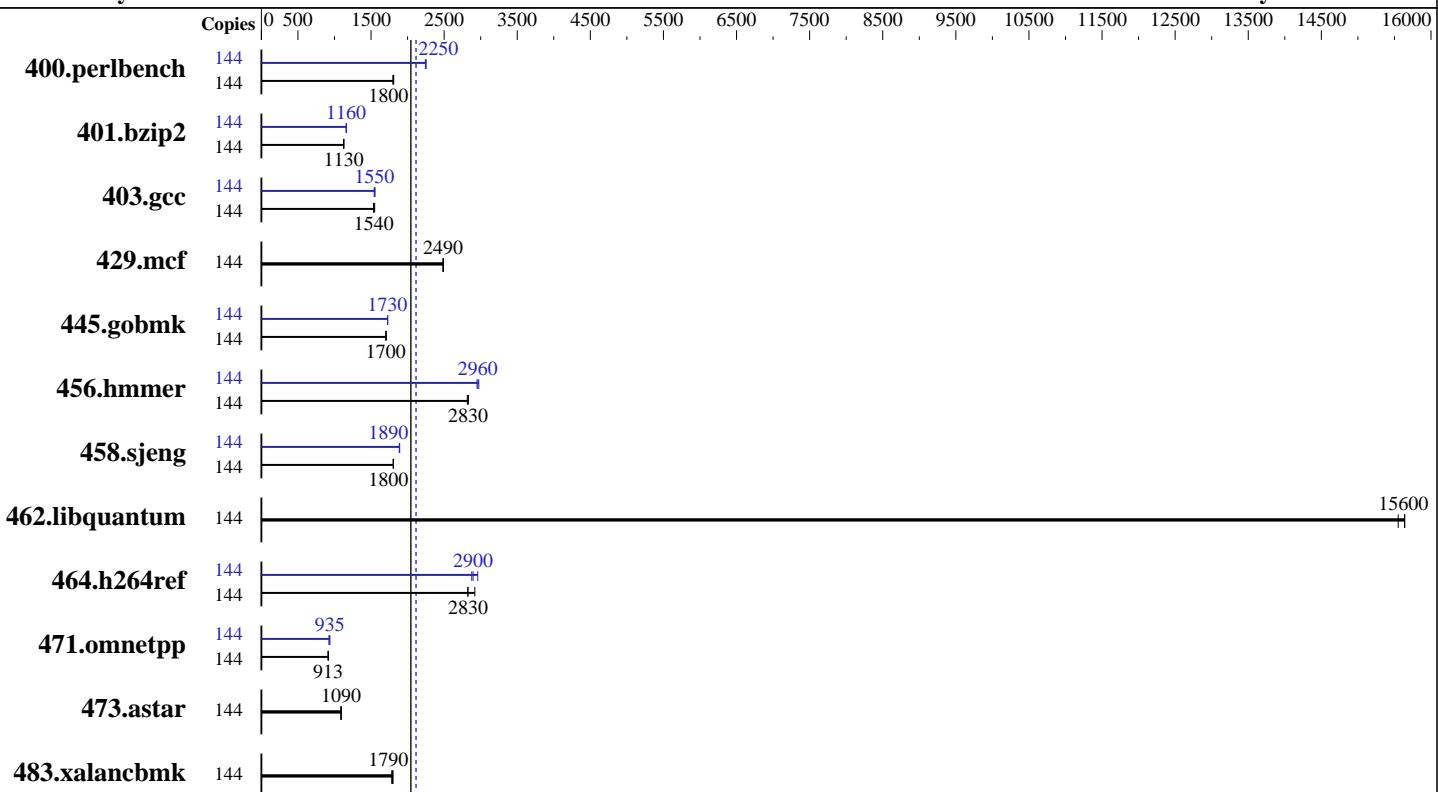

Hardware

CPU Name: Intel Xeon E7-8880L v3
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 2 x 300 GB SAS, 10K RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 2120

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

SPECint_rate_base2006 = 2040

CPU2006 license: 3175

Test date: Sep-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Oct-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	144	777	1810	780	1800	782	1800	144	625	2250	627	2240	625	2250
401.bzip2	144	1232	1130	1232	1130	1236	1120	144	1194	1160	1196	1160	1198	1160
403.gcc	144	754	1540	748	1550	755	1540	144	751	1540	749	1550	745	1560
429.mcf	144	528	2490	528	2490	528	2490	144	528	2490	528	2490	528	2490
445.gobmk	144	884	1710	886	1700	888	1700	144	875	1730	875	1730	874	1730
456.hammer	144	475	2830	477	2820	475	2830	144	455	2950	454	2960	452	2970
458.sjeng	144	966	1800	965	1800	965	1810	144	921	1890	922	1890	924	1890
462.libquantum	144	191	15600	191	15600	192	15600	144	191	15600	191	15600	192	15600
464.h264ref	144	1091	2920	1127	2830	1128	2820	144	1108	2880	1077	2960	1100	2900
471.omnetpp	144	980	918	986	913	986	913	144	963	935	974	924	962	936
473.astar	144	930	1090	925	1090	928	1090	144	930	1090	925	1090	928	1090
483.xalancbmk	144	554	1790	557	1780	552	1800	144	554	1790	557	1780	552	1800

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set Memory Power Saving to disabled

Sysinfo program /zsn/spec1/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-f818 Tue Sep 29 19:28:04 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8880L v3 @ 2.00GHz

4 "physical id"s (chips)

144 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 2120

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

SPECint_rate_base2006 = 2040

CPU2006 license: 3175

Test date: Sep-2015

Test sponsor: Huawei

Hardware Availability: May-2015

Tested by: Huawei

Software Availability: Oct-2014

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings   : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      529107076 kB
HugePages_Total:    0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 0
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12"
  VERSION_ID="12"
  PRETTY_NAME="SUSE Linux Enterprise Server 12"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux linux-f818 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 29 18:41
```

```
SPEC is set to: /zsn/spec1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        ext4  823G  22G  759G  3% /zsn
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISQ954 09/19/2015

Memory:

32x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 2120

SPECint_rate_base2006 = 2040

Test date: Sep-2015

Hardware Availability: May-2015

Software Availability: Oct-2014

Platform Notes (Continued)

16x NO DIMM NO DIMM

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

32x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz
16x NO DIMM NO DIMM

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/zsn/spec1/libs/32:/zsn/spec1/libs/64:/zsn/spec1/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 2120

SPECint_rate_base2006 = 2040

Test date: Sep-2015

Hardware Availability: May-2015

Software Availability: Oct-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint_rate2006 = 2120

SPECint_rate_base2006 = 2040

Test date: Sep-2015

Hardware Availability: May-2015

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hummer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885 V3 (Intel Xeon E7-8880L v3)

SPECint_rate2006 = 2120

SPECint_rate_base2006 = 2040

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Sep-2015

Hardware Availability: May-2015

Software Availability: Oct-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 3 11:55:54 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 November 2015.