



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp®_rate2006 = 157

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate_base2006 = 152

CPU2006 license: 9017


Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

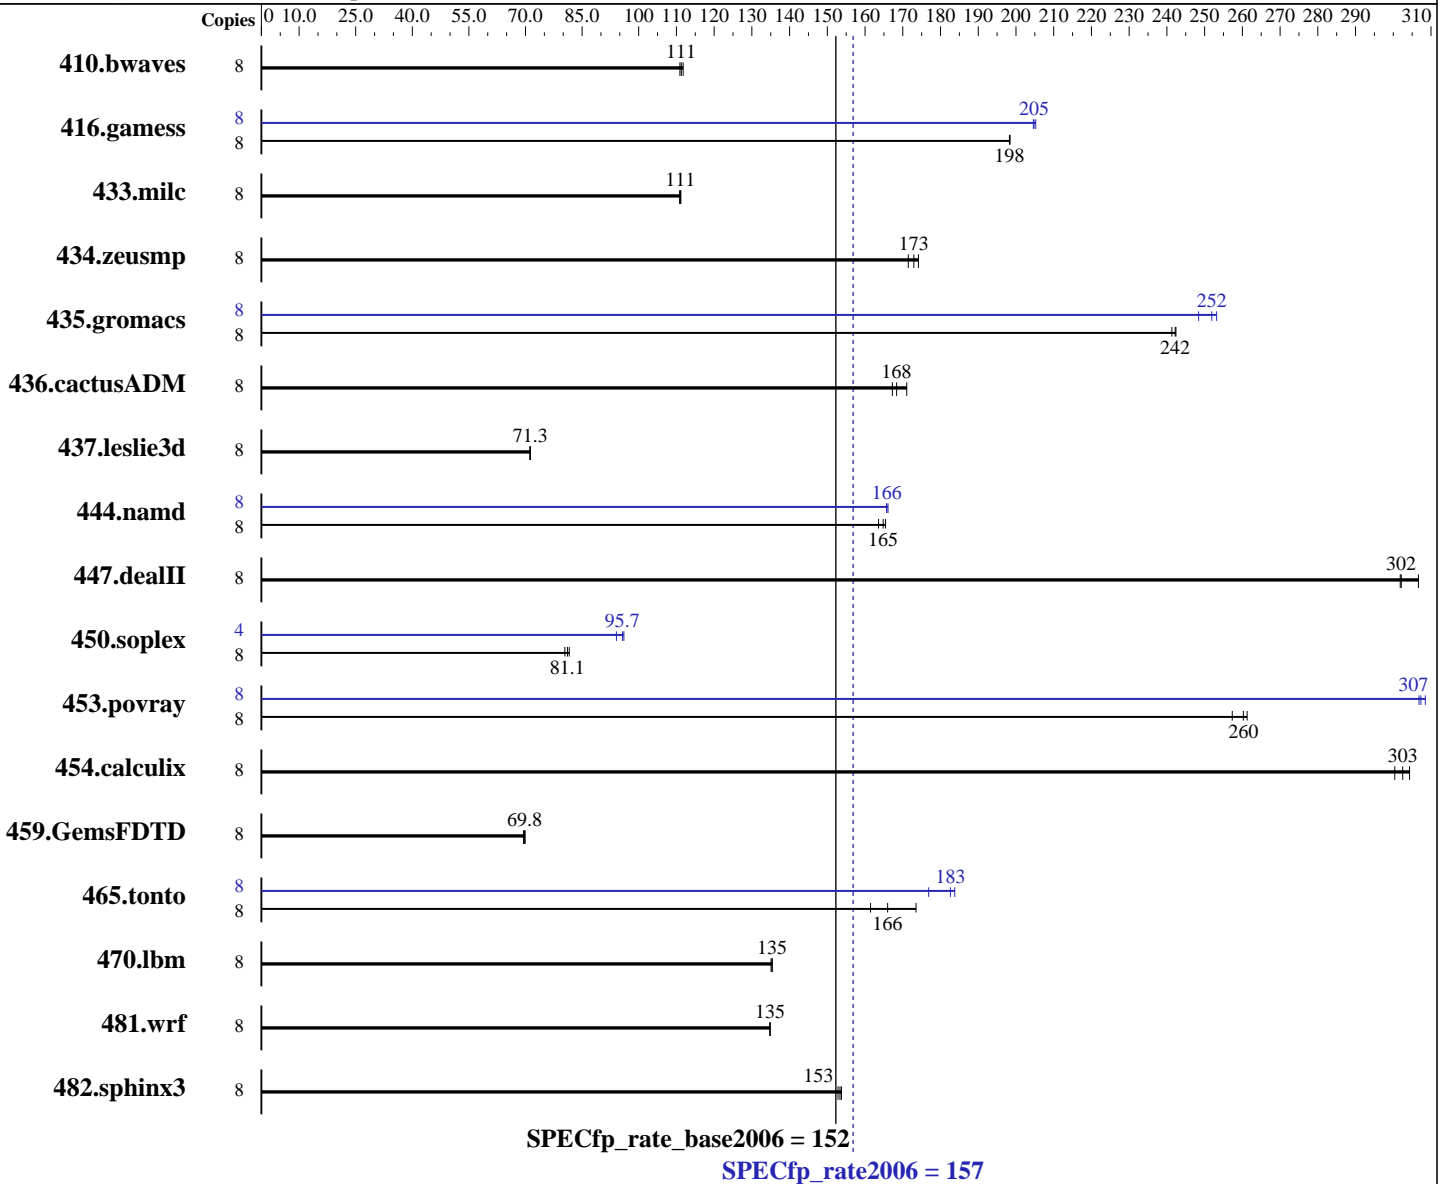

Hardware

CPU Name: Intel Xeon E3-1271 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate2006 = 157

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: May-2014

Software Availability: Jun-2014

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 2Rx8 PC3L-12800E-11, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	973	112	<u>977</u>	<u>111</u>	980	111	8	973	112	<u>977</u>	<u>111</u>	980	111		
416.gamess	8	789	198	790	198	<u>790</u>	<u>198</u>	8	766	205	<u>765</u>	<u>205</u>	763	205		
433.milc	8	661	111	<u>661</u>	<u>111</u>	663	111	8	661	111	<u>661</u>	<u>111</u>	663	111		
434.zeusmp	8	418	174	425	171	<u>421</u>	<u>173</u>	8	418	174	425	171	<u>421</u>	<u>173</u>		
435.gromacs	8	237	241	236	242	<u>236</u>	<u>242</u>	8	<u>227</u>	<u>252</u>	230	248	226	253		
436.cactusADM	8	572	167	<u>568</u>	<u>168</u>	559	171	8	572	167	<u>568</u>	<u>168</u>	559	171		
437.leslie3d	8	1054	71.3	<u>1055</u>	<u>71.3</u>	1057	71.1	8	1054	71.3	<u>1055</u>	<u>71.3</u>	1057	71.1		
444.namd	8	388	165	<u>389</u>	<u>165</u>	392	164	8	<u>387</u>	<u>166</u>	387	166	386	166		
447.dealII	8	303	302	298	307	<u>303</u>	<u>302</u>	8	303	302	298	307	<u>303</u>	<u>302</u>		
450.soplex	8	<u>822</u>	<u>81.1</u>	818	81.6	830	80.4	4	355	94.1	<u>349</u>	<u>95.7</u>	347	96.1		
453.povray	8	165	257	<u>164</u>	<u>260</u>	163	261	8	139	307	138	308	<u>138</u>	<u>307</u>		
454.calculix	8	217	304	220	300	<u>218</u>	<u>303</u>	8	217	304	220	300	<u>218</u>	<u>303</u>		
459.GemsFDTD	8	1222	69.5	<u>1217</u>	<u>69.8</u>	1214	69.9	8	1222	69.5	<u>1217</u>	<u>69.8</u>	1214	69.9		
465.tonto	8	454	174	488	161	<u>474</u>	<u>166</u>	8	428	184	<u>431</u>	<u>183</u>	445	177		
470.lbm	8	<u>812</u>	<u>135</u>	814	135	812	135	8	<u>812</u>	<u>135</u>	814	135	812	135		
481.wrf	8	663	135	<u>663</u>	<u>135</u>	663	135	8	663	135	<u>663</u>	<u>135</u>	663	135		
482.sphinx3	8	1020	153	<u>1017</u>	<u>153</u>	1014	154	8	1020	153	<u>1017</u>	<u>153</u>	1014	154		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Hyper-Threading set to Enable
Operating Mode set to "Efficiency-Favor Performance"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 157

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Platform Notes (Continued)

Sysinfo program /root/cpu2006_ic16/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on x3100m5.labs.lenovo.com Wed Oct 14 20:12:52 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1271 v3 @ 3.60GHz
 1 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings   : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      16100784 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux x3100m5.labs.lenovo.com 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29
18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 14 08:09

SPEC is set to: /root/cpu2006_ic16

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   50G   49G  1.6G  97% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 157

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[J9E113LUS-1.05]- 07/06/2014

Memory:

4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 2 rank 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006_ic16/libs/32:/root/cpu2006_ic16/libs/64:/root/cpu2006_ic16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 157

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -ansi-alias

C++ benchmarks:
 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -ansi-alias

Fortran benchmarks:
 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
 -ansi-alias

Peak Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks (except as noted below):
 icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 157

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
         -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -prof-use(pass 2)
          -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
          -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
          -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
          -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate2006 = 157

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: May-2014

Software Availability: Jun-2014

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3100 M5
(Intel Xeon E3-1271 v3, 4.00 GHz)

SPECfp_rate2006 = 157

SPECfp_rate_base2006 = 152

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: May-2014

Software Availability: Jun-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 17 19:13:39 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.