



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint®2006 = 65.7**

**SPECint\_base2006 = 63.6**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

**Test date:** Oct-2015

**Hardware Availability:** May-2014

**Software Availability:** Jun-2014

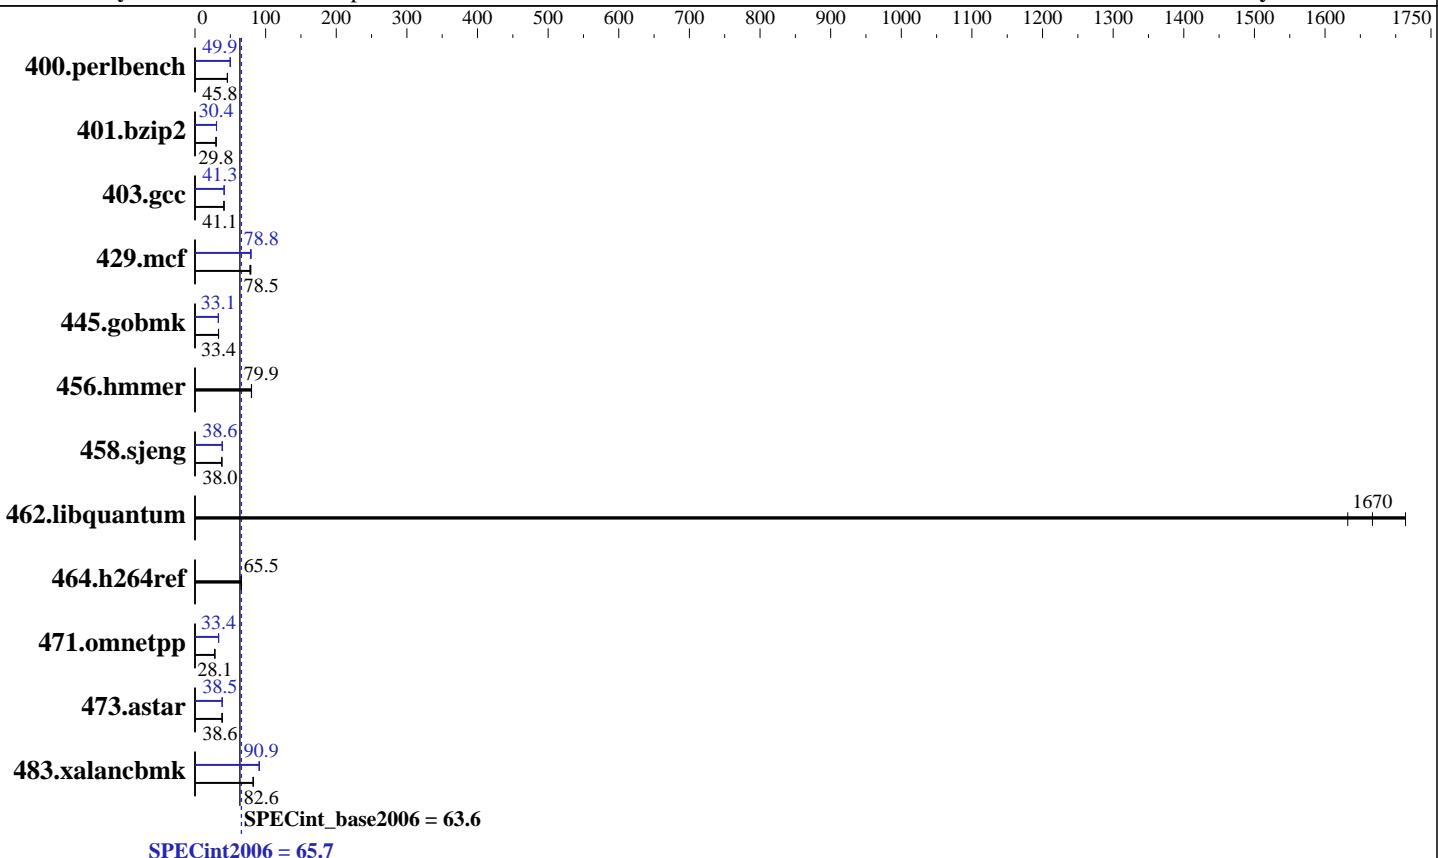

Hardware		Software	
CPU Name:	Intel Xeon E3-1271 v3	Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz		3.10.0-229.el7.x86_64
CPU MHz:	3600	Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
FPU:	Integrated	Auto Parallel:	Yes
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip	File System:	xfs
CPU(s) orderable:	1 chip	System State:	Run level 3 (multi-user)
Primary Cache:	32 KB I + 32 KB D on chip per core	Base Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Peak Pointers:	32/64-bit
L3 Cache:	8 MB I+D on chip per chip	Other Software:	Microquill SmartHeap V10.2
Other Cache:	None		
Memory:	16 GB (4 x 4 GB 2Rx8 PC3L-12800E-11, ECC)		
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM		
Other Hardware:	None		



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint2006 = 65.7**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	212	46.0	213	45.8	<b><u>213</u></b>	<b><u>45.8</u></b>	<b><u>196</u></b>	<b><u>49.9</u></b>	196	49.8	195	50.0
401.bzip2	<b><u>323</u></b>	<b><u>29.8</u></b>	324	29.8	323	29.8	318	30.4	316	30.5	<b><u>317</u></b>	<b><u>30.4</u></b>
403.gcc	196	41.1	197	41.0	<b><u>196</u></b>	<b><u>41.1</u></b>	195	41.3	195	41.2	<b><u>195</u></b>	<b><u>41.3</u></b>
429.mcf	117	77.7	115	79.1	<b><u>116</u></b>	<b><u>78.5</u></b>	<b><u>116</u></b>	<b><u>78.8</u></b>	116	78.5	115	79.6
445.gobmk	314	33.4	316	33.2	<b><u>315</u></b>	<b><u>33.4</u></b>	317	33.1	<b><u>317</u></b>	<b><u>33.1</u></b>	317	33.1
456.hmmer	<b><u>117</u></b>	<b><u>79.9</u></b>	117	79.9	116	80.1	<b><u>117</u></b>	<b><u>79.9</u></b>	117	79.9	116	80.1
458.sjeng	319	37.9	<b><u>319</u></b>	<b><u>38.0</u></b>	318	38.0	313	38.6	<b><u>313</u></b>	<b><u>38.6</u></b>	314	38.5
462.libquantum	12.1	1710	12.7	1630	<b><u>12.4</u></b>	<b><u>1670</u></b>	12.1	1710	12.7	1630	<b><u>12.4</u></b>	<b><u>1670</u></b>
464.h264ref	<b><u>338</u></b>	<b><u>65.5</u></b>	337	65.7	339	65.3	<b><u>338</u></b>	<b><u>65.5</u></b>	337	65.7	339	65.3
471.omnetpp	222	28.2	<b><u>222</u></b>	<b><u>28.1</u></b>	224	27.9	187	33.4	187	33.4	<b><u>187</u></b>	<b><u>33.4</u></b>
473.astar	184	38.1	<b><u>182</u></b>	<b><u>38.6</u></b>	182	38.7	183	38.4	182	38.5	<b><u>183</u></b>	<b><u>38.5</u></b>
483.xalancbmk	84.0	82.1	83.5	82.7	<b><u>83.6</u></b>	<b><u>82.6</u></b>	75.7	91.1	76.0	90.8	<b><u>75.9</u></b>	<b><u>90.9</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Hyper-Threading set to Disable

Operating Mode set to "Efficiency-Favor Performance"

Sysinfo program /root/cpu2006\_ic16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3fbb8667b5a285932ceab81e28219e1

running on x3100m5.labs.lenovo.com Tue Oct 13 14:54:14 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1271 v3 @ 3.60GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint2006 = 65.7**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Platform Notes (Continued)

```
siblings : 4
physical 0: cores 0 1 2 3
cache size : 8192 KB

From /proc/meminfo
MemTotal:       16100784 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.1 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.1"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
  redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
  system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux x3100m5.labs.lenovo.com 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29
18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 13 14:33

SPEC is set to: /root/cpu2006_ic16
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   50G   49G   1.6G  97% /
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[J9E113LUS-1.05]- 07/06/2014
Memory:
 4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 2 rank 1600 MHz

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/root/cpu2006\_ic16/libs/32:/root/cpu2006\_ic16/libs/64:/root/cpu2006\_ic16/sh"

OMP\_NUM\_THREADS = "4"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint2006 = 65.7**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint2006 = 65.7**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)

-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch

-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)

-ipo(pass 2) -O3(pass 2) -no-prec-div

-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc

-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel

-opt-prefetch -auto-p32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint2006 = 65.7**

**SPECint\_base2006 = 63.6**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Oct-2015

**Hardware Availability:** May-2014

**Software Availability:** Jun-2014

## Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmr: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECint2006 =** **65.7**

**SPECint\_base2006 =** **63.6**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:13:41 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 November 2015.