



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

**SPECfp<sup>®</sup>\_rate2006 = 832**  
**SPECfp\_rate\_base2006 = 801**

CPU2006 license: 6


Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Oct-2015

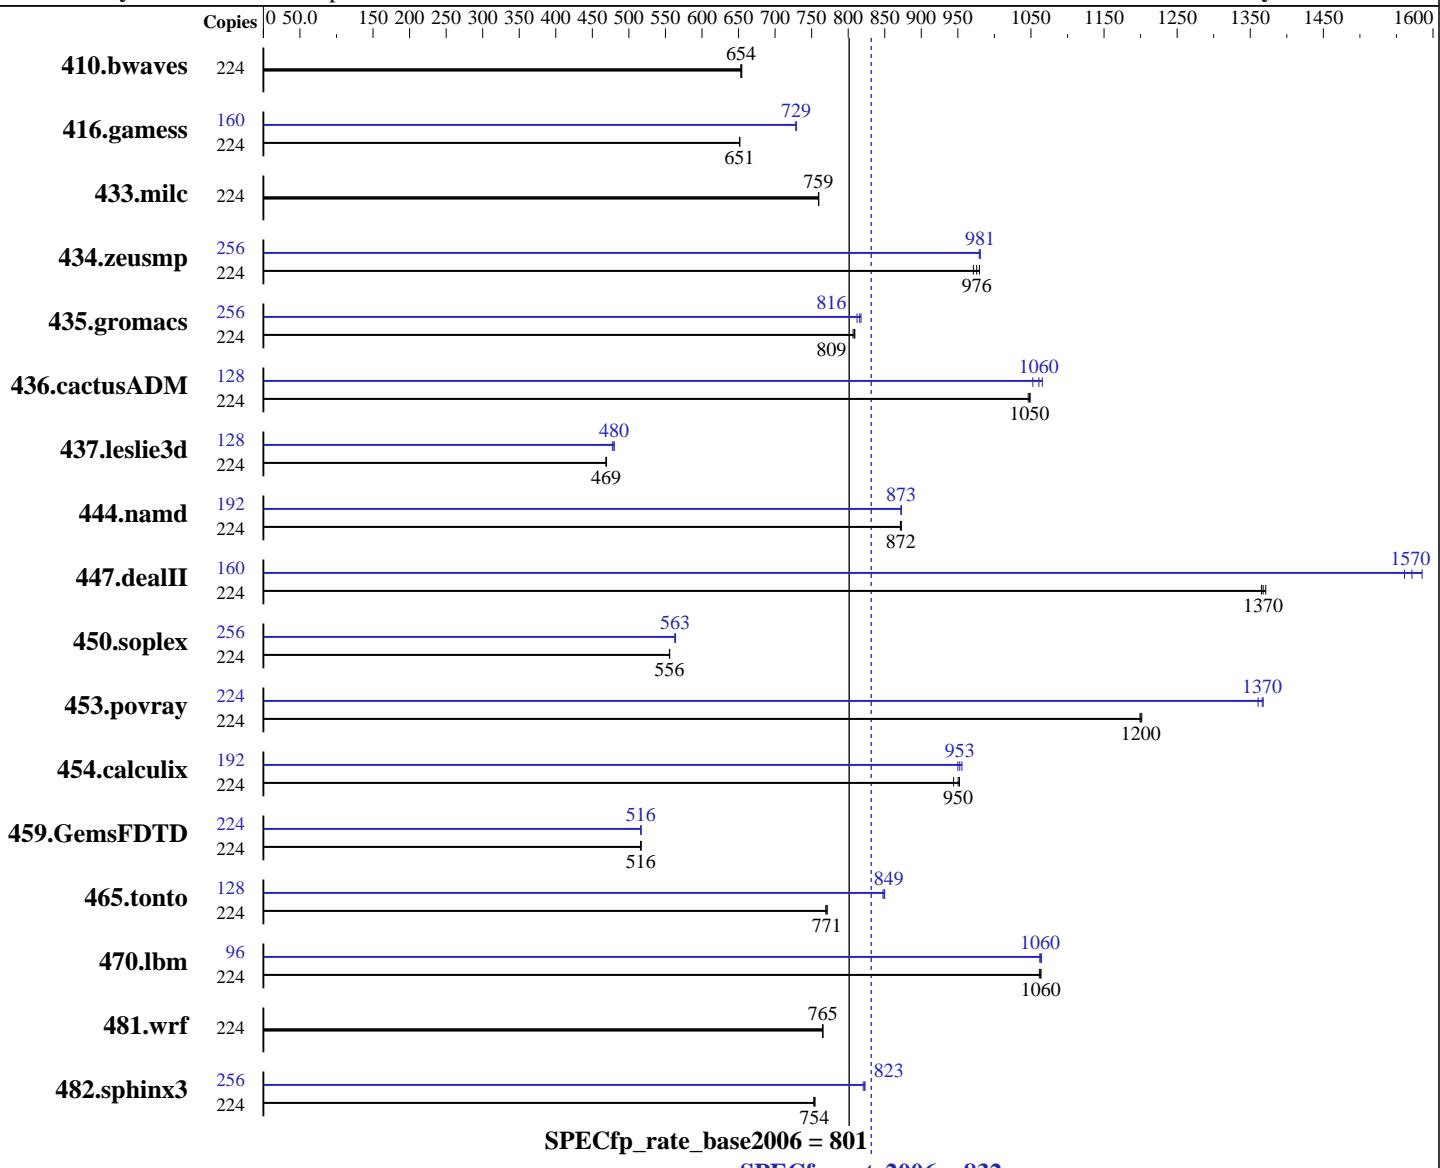

## Hardware

CPU Name: SPARC M7  
CPU Characteristics:  
CPU MHz: 4133  
FPU: Integrated  
CPU(s) enabled: 32 cores, 1 chip, 32 cores/chip, 8 threads/core  
CPU(s) orderable: 1 chip  
Primary Cache: 16 KB I + 16 KB D on chip per core  
Secondary Cache: 2 MB I on chip per chip (256 KB / 4 cores);  
4 MB D on chip per chip (256 KB / 2 cores)

## Software

Operating System: Oracle Solaris 11.3  
Compiler: C/C++/Fortran: Version 12.4 of Oracle Solaris Studio,  
4/15 Patch Set  
Auto Parallel: No  
File System: zfs  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

**SPECfp\_rate2006 = 832**  
**SPECfp\_rate\_base2006 = 801**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Oct-2015

L3 Cache: 64 MB I+D on chip per chip (8 MB / 4 cores)  
Other Cache: None  
Memory: 512 GB (16 x 32 GB 4Rx4 PC4-2133P-L)  
Disk Subsystem: 732 GB, 4 x 400 GB SAS SSD (mirrored)  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	224	4661	653	<b>4656</b>	<b>654</b>	4651	654	224	4661	653	<b>4656</b>	<b>654</b>	4651	654
416.gamess	224	6729	652	<b>6733</b>	<b>651</b>	6734	651	160	4298	729	<b>4298</b>	<b>729</b>	4299	729
433.milc	224	2706	760	2708	759	<b>2708</b>	<b>759</b>	224	2706	760	2708	759	<b>2708</b>	<b>759</b>
434.zeusmp	224	2081	980	2099	971	<b>2089</b>	<b>976</b>	256	2376	981	<b>2376</b>	<b>981</b>	2379	979
435.gromacs	224	1977	809	1983	807	<b>1978</b>	<b>809</b>	256	2236	818	2251	812	<b>2241</b>	<b>816</b>
436.cactusADM	224	2559	1050	<b>2554</b>	<b>1050</b>	2552	1050	128	1453	1050	<b>1442</b>	<b>1060</b>	1435	1070
437.leslie3d	224	<b>4490</b>	<b>469</b>	4485	469	4492	469	128	2508	480	<b>2508</b>	<b>480</b>	2520	477
444.namd	224	2062	871	<b>2061</b>	<b>872</b>	2058	873	192	<b>1765</b>	<b>873</b>	1765	872	1765	873
447.dealII	224	1869	1370	<b>1874</b>	<b>1370</b>	1877	1370	160	<b>1165</b>	<b>1570</b>	1155	1590	1173	1560
450.soplex	224	3361	556	<b>3362</b>	<b>556</b>	3363	555	256	3786	564	<b>3791</b>	<b>563</b>	3792	563
453.povray	224	994	1200	992	1200	<b>993</b>	<b>1200</b>	224	<b>872</b>	<b>1370</b>	871	1370	876	1360
454.calculix	224	<b>1944</b>	<b>950</b>	1941	952	1957	944	192	1658	956	1667	950	<b>1663</b>	<b>953</b>
459.GemsFDTD	224	4605	516	4600	517	<b>4602</b>	<b>516</b>	224	<b>4601</b>	<b>516</b>	4601	517	4602	516
465.tonto	224	2865	769	<b>2859</b>	<b>771</b>	2858	771	128	1486	848	1482	850	<b>1483</b>	<b>849</b>
470.lbm	224	2894	1060	2899	1060	<b>2894</b>	<b>1060</b>	96	<b>1241</b>	<b>1060</b>	1239	1060	1242	1060
481.wrf	224	3269	765	3271	765	<b>3269</b>	<b>765</b>	224	3269	765	3271	765	<b>3269</b>	<b>765</b>
482.sphinx3	224	<b>5790</b>	<b>754</b>	5785	755	5799	753	256	<b>6063</b>	<b>823</b>	6080	821	<b>6065</b>	<b>823</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

Processes were bound to cores using "submit" and "pbind". The config file option 'submit' was used in order to accomplish this.

## Operating System Notes

ulimit -s 131072 was used to limit the space consumed by the stack

/etc/system parameters  
set user\_reserve\_hint\_pct=85  
Informs the system about how much memory is expected to be used by applications (as a percentage)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

**SPECfp\_rate2006 = 832**  
**SPECfp\_rate\_base2006 = 801**

CPU2006 license: 6

Test date: Oct-2015

Test sponsor: Oracle Corporation

Hardware Availability: Oct-2015

Tested by: Oracle Corporation

Software Availability: Oct-2015

## Operating System Notes (Continued)

poweradm set administrative-authority=none  
Disables Solaris power management

600 GB of swap space was configured

## Platform Notes

Power policy set to 'disabled' at ILOM Power Management menu  
Sysinfo program /cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 ## 5569a0425e2ad530534e4c79a46e4d28  
running on t7-1-003.us.oracle.com Mon Oct 19 13:04:22 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo  
SPARC-M7 (chipid 0, clock 4133 MHz)  
1 chips  
256 threads  
4133 MHz

From kstat: 32 cores

From prtconf: 489728 Megabytes

/etc/release:  
Oracle Solaris 11.3 SPARC  
uname -a:  
SunOS t7-1-003.us.oracle.com 5.11 11.3 sun4v sparc sun4v

disk: df -h \$SPEC  
Filesystem Size Used Available Capacity Mounted on  
spec/nogz/cpu2006 732G 400G 332G 55% /cpu2006

(End of data from sysinfo program)

## General Notes

SPEC CPU2006 benchmark was updated with runspec --update

## Base Compiler Invocation

C benchmarks:

cc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

**SPECfp\_rate2006 = 832**  
**SPECfp\_rate\_base2006 = 801**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Oct-2015

## Base Compiler Invocation (Continued)

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

## Base Portability Flags

447.dealII: -DBOOST\_NO\_COMPILER\_CONFIG

## Base Optimization Flags

C benchmarks:

```
-g -xsegment_align=64K -fast -xipo=2 -xpagesize_heap=256M
-xthroughput -xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access
```

C++ benchmarks:

```
-g -xsegment_align=64K -fast -xipo=2 -xpagesize_heap=256M
-xthroughput -xalias_level=compatible -library=stdcxx4
-template=extdef
```

Fortran benchmarks:

```
-g -xsegment_align=64K -fast -xipo=2 -xpagesize_heap=256M
-xthroughput
```

Benchmarks using both Fortran and C:

```
-g -xsegment_align=64K -fast(cc) -fast(f90) -xipo=2
-xpagesize_heap=256M -xthroughput -xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access
```

## Base Other Flags

C benchmarks:

-xjobs=32 -V

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Fortran benchmarks:

-xjobs=32 -V -v

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

**SPECfp\_rate2006 = 832**  
**SPECfp\_rate\_base2006 = 801**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Oct-2015

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-xjobs=32 -V -v

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

## Peak Portability Flags

447.dealII: -DBOOST\_NO\_COMPILER\_CONFIG

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -g -fast -xipo=2 -xpagesize\_heap=256M -xalias\_level=std  
-xthroughput -xprefetch\_level=2  
-xprefetch\_auto\_type=indirect\_array\_access -xprefetch\_latx:3

482.sphinx3: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xipo=2 -xalias\_level=std -xprefetch=no%auto

C++ benchmarks:

444.namd: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xalias\_level=compatible -library=stdcxx4 -template=extdef  
-xthroughput

447.dealII: -g -fast -xpagesize=4M -xalias\_level=compatible  
-library=stdcxx4 -template=extdef -xprefetch=no%auto  
-xipo=2 -xrestrict

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

**SPECfp\_rate2006 = 832**  
**SPECfp\_rate\_base2006 = 801**

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Oct-2015

## Peak Optimization Flags (Continued)

```
450.soplex: -g -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xalias_level=simple
             -xrestrict -library=stlport4 -xprefetch_level=2
             -xprefetch_auto_type=indirect_array_access -xthroughput
```

```
453.povray: -g -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xalias_level=compatible -xpagesize_heap=256M
             -library=stdcxx4 -template=extdef -xthroughput
             -xprefetch=no%auto
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -g -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xpagesize=4M -xprefetch=no%auto
```

```
434.zeusmp: -g -fast -xipo=2 -xpagesize=4M -xthroughput
```

```
437.leslie3d: -g -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto
```

```
459.GemsFDTD: -g -fast -xipo=2 -xpagesize=4M -xprefetch_level=3
                -xthroughput
```

```
465.tonto: -g -xprofile=collect:./feedback(pass 1)
             -xprofile=use:./feedback(pass 2) -fast -xipo=2
             -xpagesize=4M -stackvar -xprefetch=no%auto -lbsdmalloc
```

Benchmarks using both Fortran and C:

```
435.gromacs: -g -fast(cc) -fast(f90) -xpagesize=4M -xipo=2
              -xthroughput
```

```
436.cactusADM: -g -xprofile=collect:./feedback(pass 1)
                 -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
                 -xipo=2 -xpagesize=4M -xthroughput
```

```
454.calculix: -g -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M
                 -xprefetch=no%auto -xalias_level=std
```

```
481.wrf: basepeak = yes
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Oracle Corporation  
SPARC T7-1

SPECfp\_rate2006 = 832  
SPECfp\_rate\_base2006 = 801

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Oct-2015

## Peak Other Flags

C benchmarks:

-xjobs=32 -V

C++ benchmarks:

-xjobs=32 -verbose=diags,version

Fortran benchmarks:

-xjobs=32 -V -v

Benchmarks using both Fortran and C:

-xjobs=32 -V -v

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.4.20151118.html>  
<http://www.spec.org/cpu2006/flags/Oracle-Tseries-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.4.20151118.xml>  
<http://www.spec.org/cpu2006/flags/Oracle-Tseries-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:13:43 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 November 2015.