



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp<sup>®</sup>\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

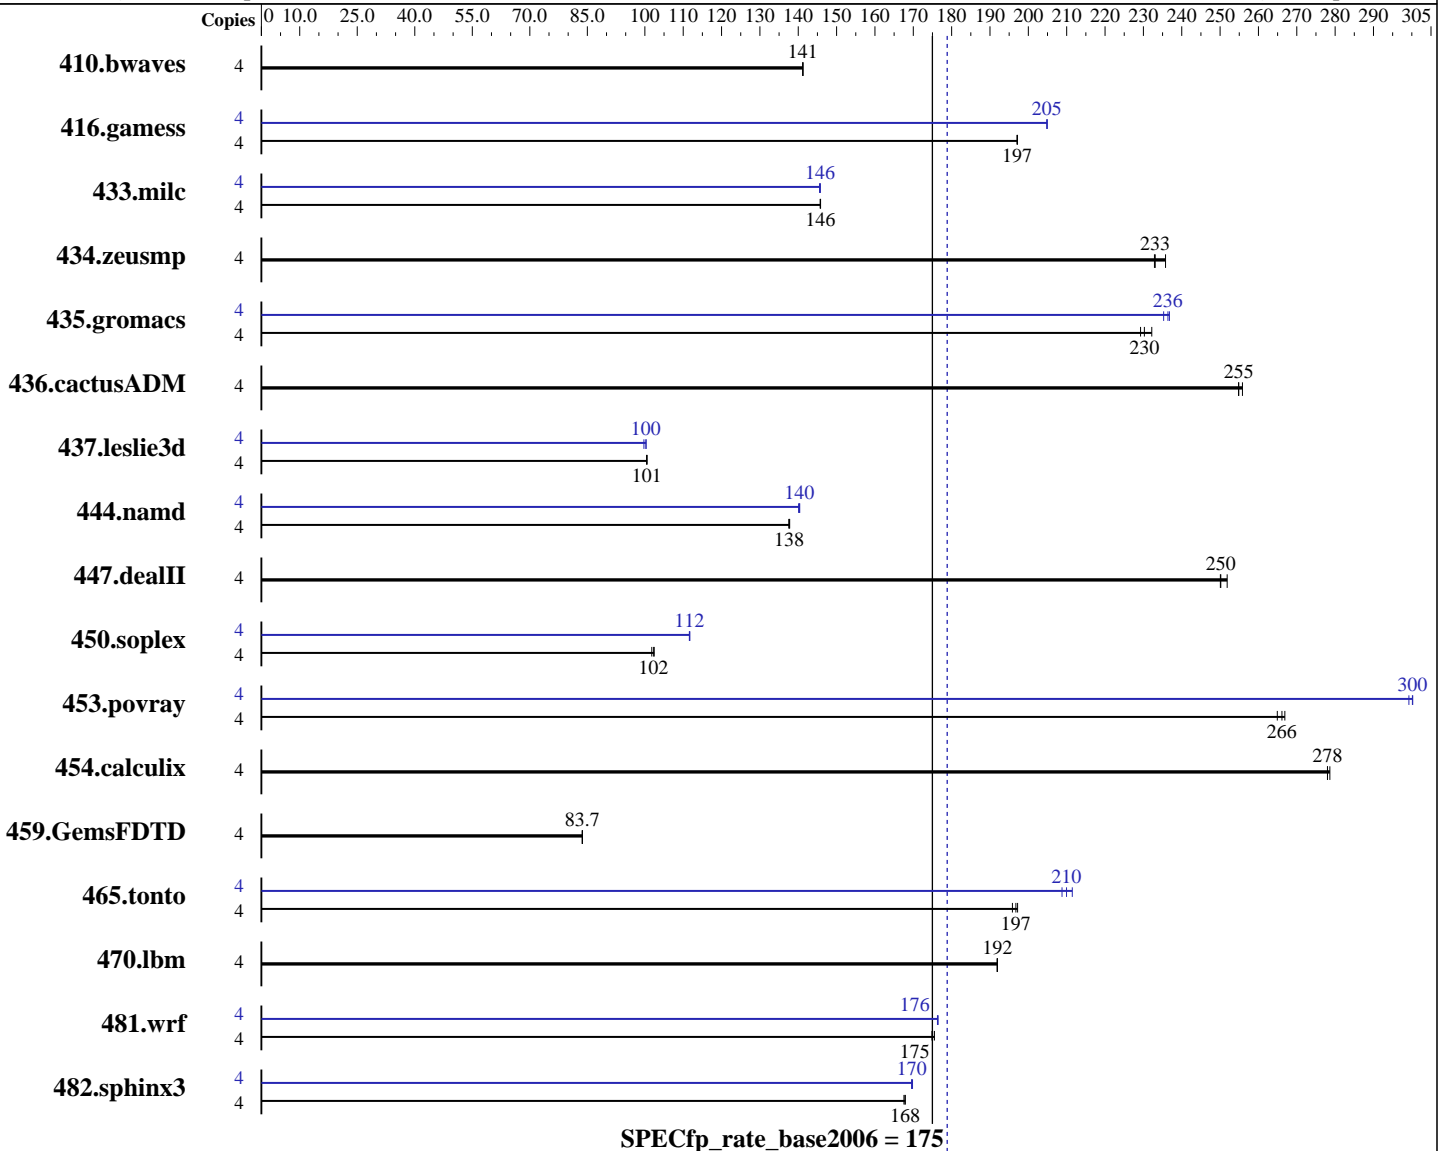

### Hardware

CPU Name: Intel Core i5-6600K  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 1Rx8 PC4-2800R-U, running at 2133 MHz)  
Disk Subsystem: 1 x 200 GB SATA III SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	385	141	385	141	<b>385</b>	<b>141</b>	4	385	141	385	141	<b>385</b>	<b>141</b>
416.gamess	4	397	197	397	197	<b>397</b>	<b>197</b>	4	<b>382</b>	<b>205</b>	382	205	382	205
433.milc	4	252	146	252	146	<b>252</b>	<b>146</b>	4	252	146	252	146	<b>252</b>	<b>146</b>
434.zeusmp	4	156	233	154	236	<b>156</b>	<b>233</b>	4	156	233	154	236	<b>156</b>	<b>233</b>
435.gromacs	4	123	232	<b>124</b>	<b>230</b>	125	229	4	<b>121</b>	<b>236</b>	121	237	121	235
436.cactusADM	4	188	255	187	256	<b>188</b>	<b>255</b>	4	188	255	187	256	<b>188</b>	<b>255</b>
437.leslie3d	4	374	100	374	101	<b>374</b>	<b>101</b>	4	<b>375</b>	<b>100</b>	377	99.8	375	100
444.namd	4	<b>233</b>	<b>138</b>	233	138	233	138	4	229	140	229	140	<b>229</b>	<b>140</b>
447.dealII	4	182	252	183	250	<b>183</b>	<b>250</b>	4	182	252	183	250	<b>183</b>	<b>250</b>
450.soplex	4	328	102	326	102	<b>326</b>	<b>102</b>	4	299	112	299	112	<b>299</b>	<b>112</b>
453.povray	4	<b>80.0</b>	<b>266</b>	80.3	265	79.7	267	4	71.1	299	<b>70.9</b>	<b>300</b>	70.9	300
454.calculix	4	118	279	119	278	<b>119</b>	<b>278</b>	4	118	279	119	278	<b>119</b>	<b>278</b>
459.GemsFDTD	4	<b>507</b>	<b>83.7</b>	507	83.7	507	83.7	4	<b>507</b>	<b>83.7</b>	507	83.7	507	83.7
465.tonto	4	<b>200</b>	<b>197</b>	201	196	200	197	4	189	209	<b>187</b>	<b>210</b>	186	211
470.lbm	4	286	192	286	192	<b>286</b>	<b>192</b>	4	286	192	286	192	<b>286</b>	<b>192</b>
481.wrf	4	255	176	256	175	<b>255</b>	<b>175</b>	4	253	176	<b>253</b>	<b>176</b>	253	176
482.sphinx3	4	465	168	<b>464</b>	<b>168</b>	464	168	4	<b>460</b>	<b>170</b>	459	170	460	170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

### Platform Notes

As tested, the system used a Supermicro CSE-743TQ-865B-SQ chassis.

The chassis is configured with a PWS-865-PQ power supply, 1 SNK-P0046A4 heatsink, as well as 1 FAN-0103L4 rear fan and 2 FAN-0104L4 chassis fan.

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on C7H170-01 Sat Oct 17 07:19:43 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Core(TM) i5-6600K CPU @ 3.50GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 6144 KB

From /proc/meminfo

MemTotal: 16334756 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.1 (Maipo)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="7.1"

PRETTY\_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"

ANSI\_COLOR="0;31"

CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.1:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.1:ga:server

uname -a:

Linux C7H170-01 3.10.0-229.el7.x86\_64 #1 SMP Thu Jan 29 18:37:38 EST 2015

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Oct 17 02:19

SPEC is set to: /usr/cpu2006

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda2 xfs 183G 9.3G 174G 6% /

Additional information from dmidecode:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 3



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. T20151015150001 10/15/2015

Memory:

4x 0420 F4-2800C16-4GRK 4 GB 1 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

## Base Portability Flags (Continued)

```

450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

### C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

### Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

### Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

```

## Peak Compiler Invocation

### C benchmarks:

```

icc -m64

```

### C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

```

### Fortran benchmarks:

```

ifort -m64

```

### Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

### C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -prof-gen(pass 1) -ipo -O3 -no-prec-div
            -prof-use(pass 2) -unroll2

```

### C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

### Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Supermicro C7H170-M motherboard  
(C7H170-M, Intel Core i5-6600K)

SPECfp\_rate2006 = 179

SPECfp\_rate\_base2006 = 175

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2015

Hardware Availability: Aug-2015

Software Availability: Sep-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:14:07 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.