



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

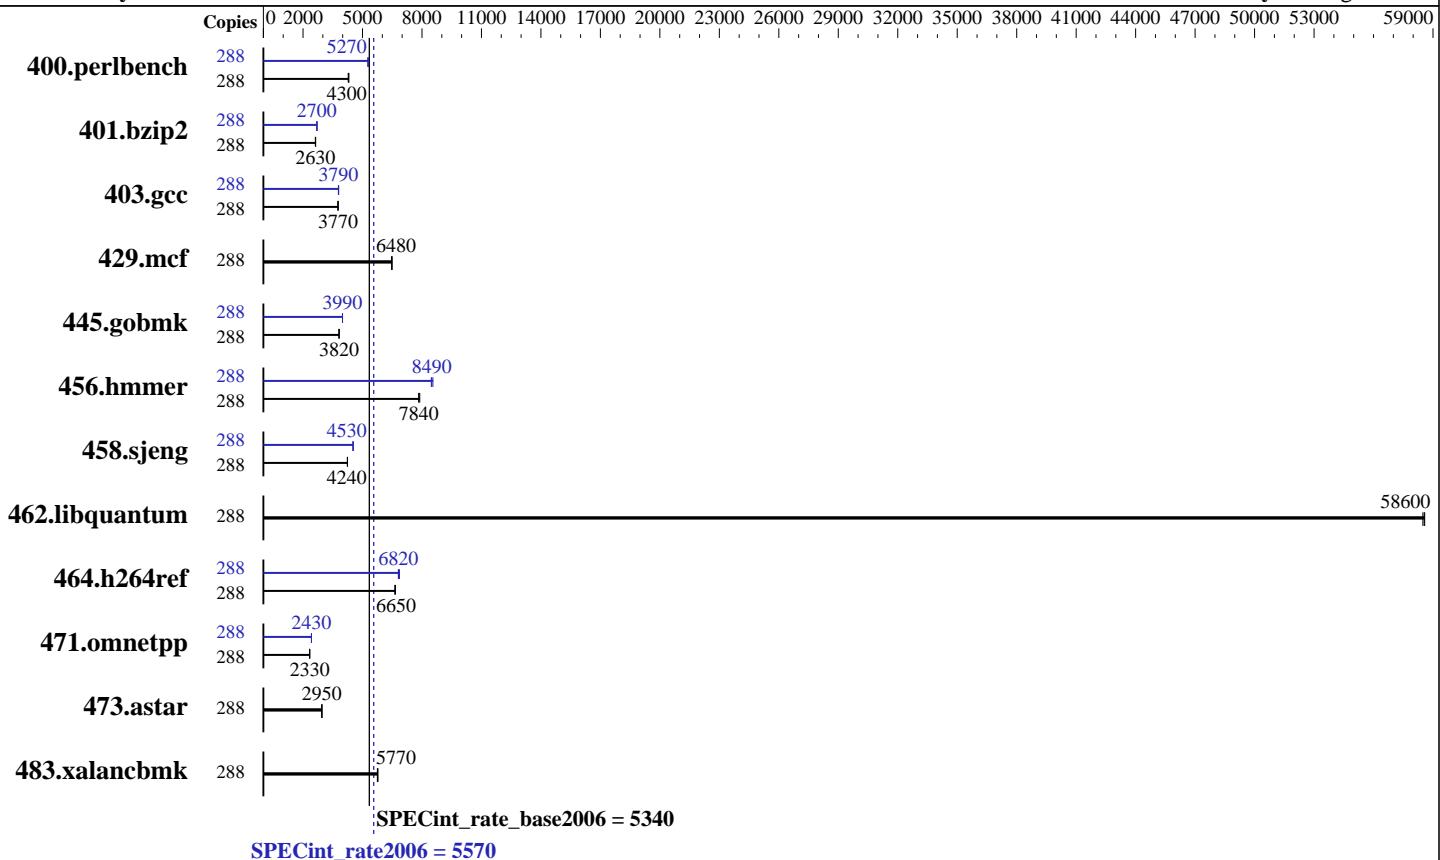

Hardware

CPU Name:	Intel Xeon E7-8890 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	144 cores, 8 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable:	2 to 16 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	2 TB (128 x 16 GB 2Rx4 PC4-2133P-L, running at 1600 MHz)
Disk Subsystem:	8 x C8S59A, 900 GB 10 K RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP3
Compiler:	Kernel 3.0.101-0.47.55-bigsmp
Auto Parallel:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
File System:	No
System State:	tmpfs
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	Microquill SmartHeap V10.2
	Updated libgcc_s1, glibc, and libstdc++6



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3

Test date: Oct-2015

Test sponsor: HPE

Hardware Availability: Oct-2015

Tested by: HPE

Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	288	654	4300	653	4310	658	4280	288	534	5270	533	5270	530	5310
401.bzip2	288	1055	2630	1055	2630	1060	2620	288	1029	2700	1029	2700	1028	2700
403.gcc	288	617	3760	614	3770	615	3770	288	613	3780	610	3800	612	3790
429.mcf	288	406	6460	406	6480	404	6490	288	406	6460	406	6480	404	6490
445.gobmk	288	791	3820	792	3820	792	3820	288	757	3990	757	3990	757	3990
456.hammer	288	343	7840	341	7890	343	7840	288	316	8490	314	8550	317	8470
458.sjeng	288	822	4240	822	4240	822	4240	288	770	4530	770	4520	770	4530
462.libquantum	288	102	58500	102	58600	102	58600	288	102	58500	102	58600	102	58600
464.h264ref	288	957	6660	960	6640	958	6650	288	936	6810	935	6820	928	6870
471.omnetpp	288	771	2330	770	2340	771	2330	288	742	2430	742	2430	742	2430
473.astar	288	685	2950	685	2950	686	2950	288	685	2950	685	2950	686	2950
483.xalancbmk	288	346	5750	345	5770	344	5780	288	346	5750	345	5770	344	5780

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

intel_idle.max_cstate=1 appended in kernel command line

Power profile set with:

cpupower -c all frequency-set -g performance

Benchmark installed under /dev/shm/cpu2006 and mounted with:

mount -o bind /dev/shm/cpu2006 /cpu2006

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

To run the Intel binaries based off the Intel 16.0 compiler (with SLES11 SP3), the following software was updated:

libgcc_s1 (32 and 64-bit versions) to version 4.8.3+r212056-6.3

glibc (32 and 64-bit versions) to version 2.19-17.72

libstdc++6 (32 and 64-bit versions) to version 4.8.3+r212056-6.3



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

Platform Notes

Firmware settings:

```
Memory RAS Configuration set to Maximum Performance
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on hawk050os1 Mon Oct 26 11:10:33 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
  8 "physical id"s (chips)
  288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 18
  siblings   : 36
  physical 0: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 2: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 3: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 4: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 5: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 6: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 7: cores 0 1 2 3 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      2117695720 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 3
```

```
uname -a:
Linux hawk050os1 3.0.101-0.47.55-bigsmp #1 SMP Thu May 28 08:25:11 UTC 2015
(dc083ee) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 26 10:56 last=S
```

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs           tmpfs  1010G  3.8G  1007G  1% /dev/shm
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP Bundle: 007.005.000 SFW: 033.161.000 07/18/2015

Memory:

103x HP 36ASF2G72LZ-2G1A1 16 GB 2133 MHz, configured at 1600 MHz

12x HP HMA42GL7MFR4N-TF 16 GB 2133 MHz, configured at 1600 MHz

13x HP M386A2G40DB0-CPB 16 GB 2133 MHz, configured at 1600 MHz

64x not defined not defined

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 2 TB and the dmidecode description should have three lines reading as:

103x HP 36ASF2G72LZ-2G1A1 16 GB 2133 MHz, configured at 1600 MHz

12x HP HMA42GL7MFR4N-TF 16 GB 2133 MHz, configured at 1600 MHz

13x HP M386A2G40DB0-CPB 16 GB 2133 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

Base Portability Flags (Continued)

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

Peak Portability Flags (Continued)

```

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
               -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
               -opt-mem-layout-trans=3

456.hammer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
               -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
               -ansi-alias

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Integrity Superdome X

(144 core, 2.50 GHz, Intel Xeon E7-8890 v3)

SPECint_rate2006 = 5570

SPECint_rate_base2006 = 5340

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2015

Hardware Availability: Oct-2015

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
              -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-Integrity-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-Integrity-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:17:48 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.