




SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power S812LC (2.92 GHz, 10 core, Red Hat)

SPECint_rate2006 = 642

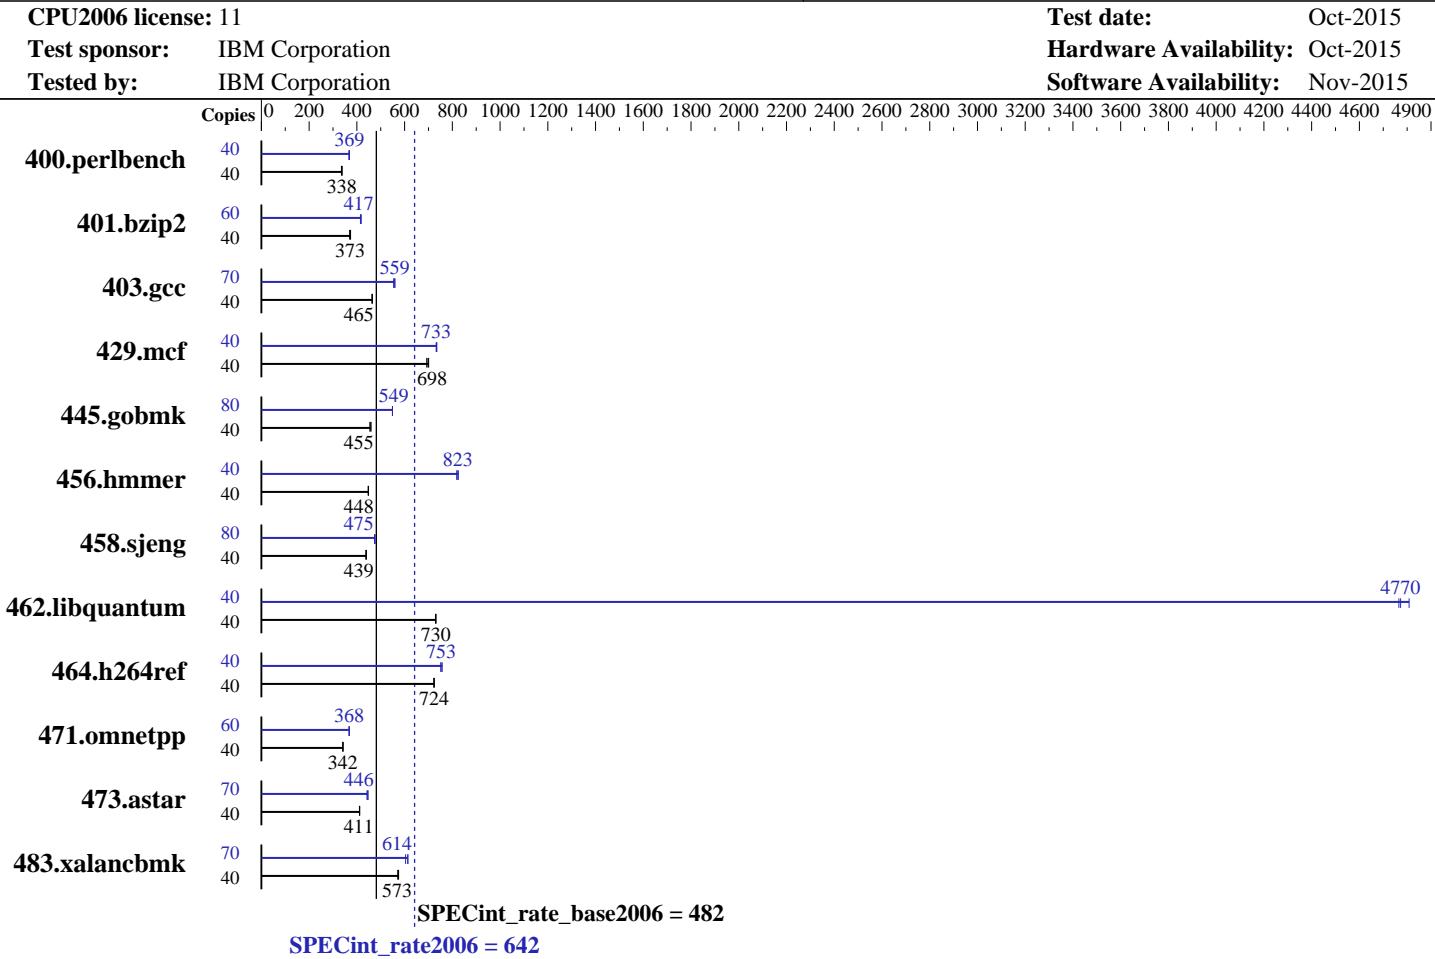

SPECint_rate_base2006 = 482

SPECint_rate2006 = 642

Hardware

CPU Name: POWER8
CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.49 GHz
CPU MHz: 2926
FPU: Integrated
CPU(s) enabled: 10 cores, 1 chip, 10 cores/chip, 8 threads/core
CPU(s) orderable: 1 Modules
Primary Cache: 32 KB I + 64 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 8 MB I+D on chip per core
Other Cache: 16 MB I+D off chip per 4 DIMMs
Memory: 256 GB (16 x 16 GB DIMMs) DDR3 1333 MHz
Disk Subsystem: 1 x 6TB 7200 RPM SATA LFF Disk
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (ppc64) kernel <3.10.0-229>
Compiler: PowerKVM 3.1 kernel <3.18.17-348>
Auto Parallel: C/C++: Version 13.1 of IBM XL C/C++ for Linux
File System: No
System State: xfs
Base Pointers: Run level 3 (multi-user)
Peak Pointers: 32-bit
Other Software: 32/64-bit
Post-Link Optimization for Linux on POWER, version 5.6.2.6
IBM Advance Toolchain 7.0-3



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power S812LC (2.92 GHz, 10 core, Red Hat)

SPECint_rate2006 = 642

CPU2006 license: 11

Test date: Oct-2015

Test sponsor: IBM Corporation

Hardware Availability: Oct-2015

Tested by: IBM Corporation

Software Availability: Nov-2015

SPECint_rate_base2006 = 482

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	1165	335	1157	338	1157	338	40	1066	366	1059	369	1059	369
401.bzip2	40	1044	370	1036	373	1033	374	60	1395	415	1387	417	1387	417
403.gcc	40	693	465	695	463	693	465	70	1007	559	1009	559	1017	554
429.mcf	40	521	701	523	698	527	693	40	496	735	498	733	498	733
445.gobmk	40	913	460	922	455	921	455	80	1528	549	1528	549	1528	549
456.hammer	40	833	448	832	448	833	448	40	453	823	452	825	456	818
458.sjeng	40	1103	439	1104	438	1102	439	80	2038	475	2038	475	2035	476
462.libquantum	40	1135	730	1135	730	1134	731	40	174	4770	174	4770	172	4810
464.h264ref	40	1225	723	1223	724	1223	724	40	1168	758	1178	752	1176	753
471.omnetpp	40	732	342	731	342	732	342	60	1019	368	1020	368	1019	368
473.astar	40	684	411	681	412	683	411	70	1103	446	1100	447	1111	442
483.xalancbmk	40	480	575	483	571	482	573	70	799	604	787	614	787	614

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

400.perlbench fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

401.bzip2 fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

403.gcc fdpr options: -04 -m power8 -A 2 -sls -dir -vrox

429.mcf fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

456.hammer fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

458.sjeng fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

462.libquantum fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

464.h264ref fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

471.omnetpp fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

473.astar fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

483.xalancbmk fdpr options: -04 -m power8 -A 2 -rcl 2 -sls -dir -vrox

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "numactl" command (see flags file for details).

Operating System Notes

Red Hat 7.1 guest running on PowerKVM 3.1 host

ulimit -s (stack) set to unlimited

Transparent huge page disabled with
echo never > /sys/kernel/mm/transparent_hugepage/enabled
sysctl vm.nr_hugepages=N and reboot to set large page pool



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 642

IBM Power S812LC (2.92 GHz, 10 core, Red Hat)

SPECint_rate_base2006 = 482

CPU2006 license: 11

Test date: Oct-2015

Test sponsor: IBM Corporation

Hardware Availability: Oct-2015

Tested by: IBM Corporation

Software Availability: Nov-2015

General Notes

Environment variables set by runspec before the start of the run:

```
HUGETLB_MORECORE = "yes"  
HUGETLB_VERBOSE = "0"  
TCMALLOC_MEMFS_MALLOC_PATH = "/dev/hugepages/"  
XLF RTEOPTS = "intrinthds=1"
```

This result uses the post_setup and/or bench_post_setup to drop caches. SPEC has determined that although the effect may have been negligible for this run, future submissions will not be considered rule compliant if the post_setup actions drop caches (e.g. : "echo 3 > /proc/sys/vm/drop_caches").

Base Compiler Invocation

C benchmarks:

```
/opt/ibm/xlc/13.1.0/bin/xlc_at -qlanglvl=extc99
```

C++ benchmarks:

```
/opt/ibm/xlc/13.1.0/bin/xlc_at
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_PPC  
462.libquantum: -DSPEC_CPU_LINUX  
        464.h264ref: -qchars=signed  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-qinline=40 -qipa=threads -qlargepage -O5 -qalias=noansi -qalloc  
-lhugetlbfs
```

C++ benchmarks:

```
-qinline=40 -qipa=threads -qlargepage -O5 -qrtti -ltcmalloc
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 642

IBM Power S812LC (2.92 GHz, 10 core, Red Hat)

SPECint_rate_base2006 = 482

CPU2006 license: 11

Test date: Oct-2015

Test sponsor: IBM Corporation

Hardware Availability: Oct-2015

Tested by: IBM Corporation

Software Availability: Nov-2015

Peak Compiler Invocation

C benchmarks:

/opt/ibm/xlc/13.1.0/bin/xlc_at -qlanglvl=extc99

C++ benchmarks:

/opt/ibm/xlc/13.1.0/bin/xlc_at

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_PPC

403.gcc: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

464.h264ref: -qchars=signed

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -qinline=40 -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto
-qtune=auto -qfdpr -qalias=noansi -lhugetlbfs -Wl,-q

401.bzip2: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O4 -qsimd=noauto -qlargepage -qfdpr -lhugetlbfs -Wl,-q

403.gcc: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O4 -q64 -qlargepage -qfdpr -qalloc -lhugetlbfs -Wl,-q

429.mcf: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qlargepage -qnoprefetch -qfdpr -lhugetlbfs -Wl,-q

445.gobmk: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qlargepage -lhugetlbfs

456.hmmer: -qinline=40 -qipa=threads -O5 -qlargepage
-qassert=refalign -qfdpr -lhugetlbfs -Wl,-q

458.sjeng: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O3 -qarch=auto -qtune=auto -qprefetch=dscr=0x54 -qfdpr
-lhugetlbfs -Wl,-q

462.libquantum: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qsimd=noauto -qinline=400 -q64 -qlargepage -qfdpr
-lhugetlbfs -Wl,-q

464.h264ref: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qfdpr -lhugetlbfs -Wl,-q

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 642

IBM Power S812LC (2.92 GHz, 10 core, Red Hat)

SPECint_rate_base2006 = 482

CPU2006 license: 11

Test date: Oct-2015

Test sponsor: IBM Corporation

Hardware Availability: Oct-2015

Tested by: IBM Corporation

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
             -O5 -qsimd=noauto -qarch=pwr7 -qtune=pwr7
             -qprefetch=dscr=0x54 -qfdpr -qrtti -lhugetlbfs -Wl,-q
             -ltcmalloc
```

```
473.astar: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
             -O5 -qlargepage -qprefetch=dscr=0x93 -qfdpr -lhugetlbfs
             -Wl,-q -ltcmalloc
```

```
483.xalancbmk: -qinline=40 -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2)
                 -O3 -qarch=auto -qtune=auto -qsimd -qlargepage
                 -qprefetch=dscr=0x93 -qipa=partition=large -qfdpr
                 -lhugetlbfs -Wl,-q -ltcmalloc
```

Peak Other Flags

C benchmarks (except as noted below):

```
-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-036
```

```
400.perlbench: -qsuppress=1586-476(pass 2) -qsuppress=1500-036
```

```
456.hmmr: -qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qsuppress=1586-476(pass 2) -qipa=noobject -qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.V13La.html>

<http://www.spec.org/cpu2006/flags/IBM-Linux-V7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.V13La.xml>

<http://www.spec.org/cpu2006/flags/IBM-Linux-V7.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 20 18:27:46 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.