



SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp®_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

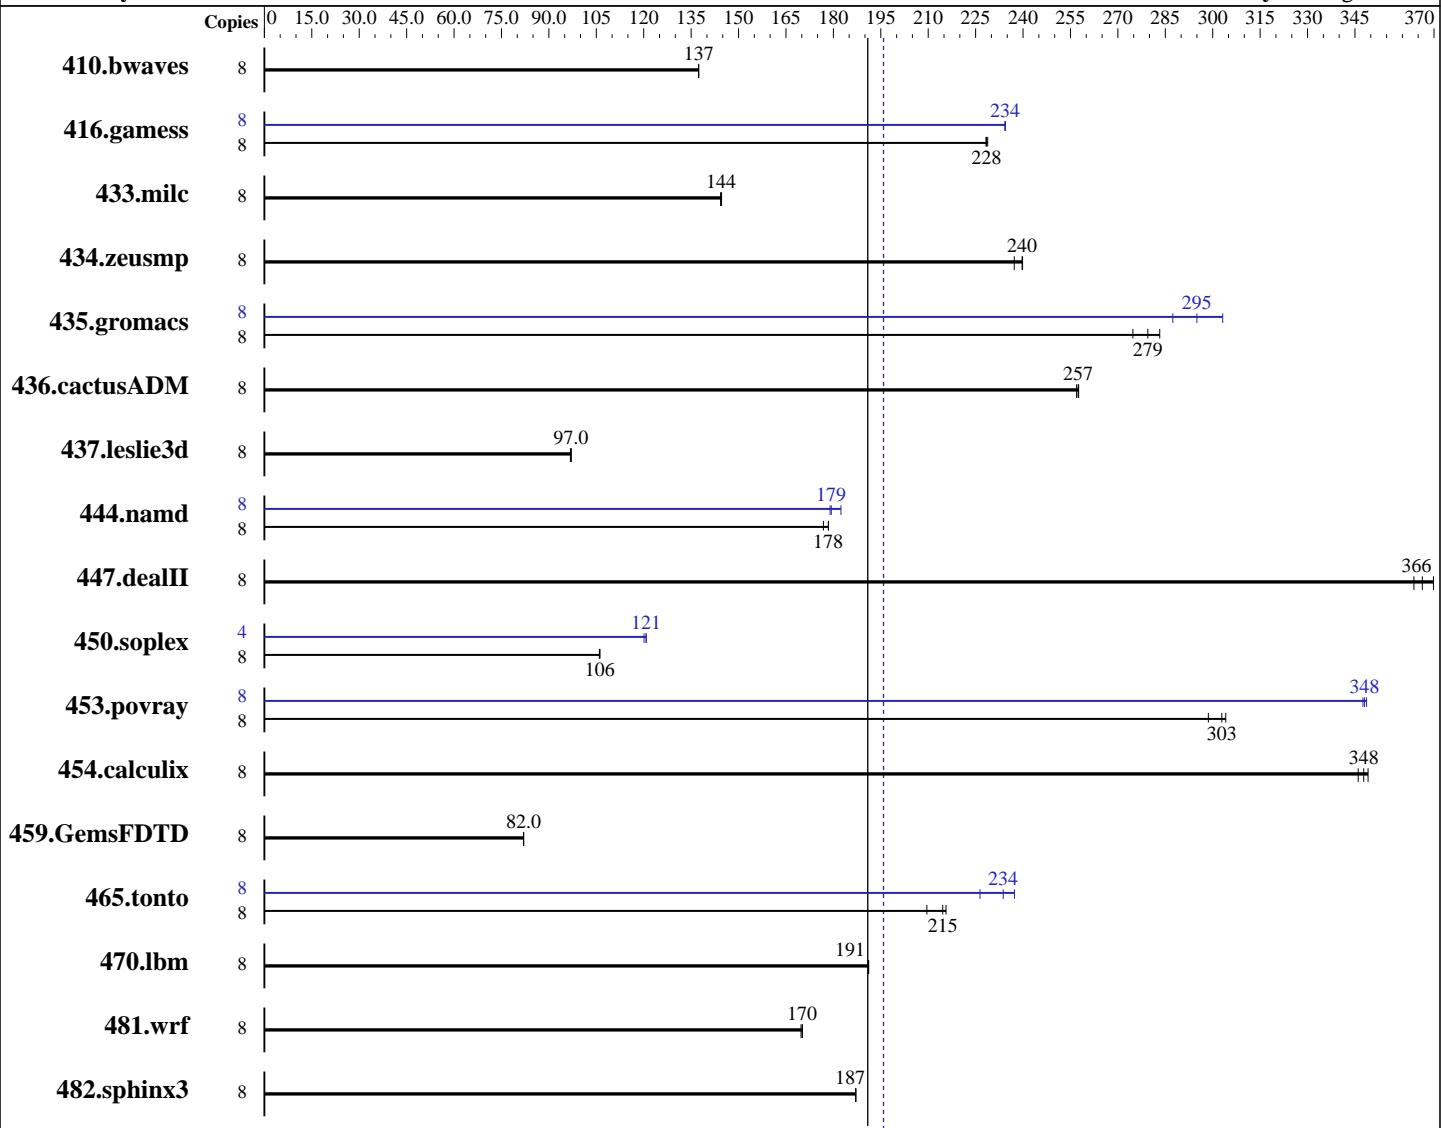

SPECfp_rate_base2006 = 191

SPECfp_rate2006 = 196

Hardware

CPU Name: Intel Xeon E3-1280 v5
CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz: 3700
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12
Kernel 3.12.28-4-default
Compiler:
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test date: Nov-2015

Test sponsor: HPE

Hardware Availability: Dec-2015

Tested by: HPE

Software Availability: Aug-2015

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem: 1 x 1 TB SATA, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	791	137	792	137	791	137	8	791	137	792	137	791	137
416.gamess	8	686	228	685	229	686	228	8	669	234	668	234	668	234
433.milc	8	508	144	508	145	509	144	8	508	144	508	145	509	144
434.zeusmp	8	307	237	304	240	304	240	8	307	237	304	240	304	240
435.gromacs	8	202	283	208	275	204	279	8	199	287	194	295	188	303
436.cactusADM	8	371	258	371	257	372	257	8	371	258	371	257	372	257
437.leslie3d	8	775	97.1	776	97.0	777	96.8	8	775	97.1	776	97.0	777	96.8
444.namd	8	360	178	363	177	360	178	8	352	182	358	179	359	179
447.dealII	8	247	370	250	366	252	364	8	247	370	250	366	252	364
450.soplex	8	629	106	630	106	629	106	4	276	121	278	120	276	121
453.povray	8	143	299	140	304	141	303	8	122	349	122	348	122	348
454.calculix	8	189	349	190	348	191	346	8	189	349	190	348	191	346
459.GemsFDTD	8	1035	82.0	1035	82.0	1035	82.0	8	1035	82.0	1035	82.0	1035	82.0
465.tonto	8	367	215	365	216	376	210	8	332	237	348	226	337	234
470.lbm	8	575	191	575	191	575	191	8	575	191	575	191	575	191
481.wrf	8	525	170	525	170	526	170	8	525	170	525	170	526	170
482.sphinx3	8	833	187	834	187	834	187	8	833	187	834	187	834	187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Platform Notes

BIOS Configuration:

HP Power Profile set to Custom
HP Power Regulator to HP Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Minimum Processor Idle Power Package C-State set to No Package State
Energy/Performance Bias set to Maximum Performance
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-4rhi Wed Nov 11 12:05:05 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 v5 @ 3.70GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB

From /proc/meminfo
MemTotal: 32921136 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Platform Notes (Continued)

```
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:  
Linux linux-4rhi 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014  
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 11 04:21
```

```
SPEC is set to: /home/cpu2006  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda4        xfs   889G   27G   863G   3% /home
```

Additional information from dmidecode:

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS HP U22 10/19/2015
```

Memory:

```
4x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
    -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
    -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen9

(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
 -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL20 Gen9
(3.70 GHz, Intel Xeon E3-1280 v5)

SPECfp_rate2006 = 196

SPECfp_rate_base2006 = 191

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2015

Hardware Availability: Dec-2015

Software Availability: Aug-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 1 17:42:29 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.