



SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint®2006 = 69.1

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = 66.9

CPU2006 license: 9046


Test date: Nov-2015

Test sponsor: Sugon

Hardware Availability: May-2015

Tested by: Sugon

Software Availability: Sep-2015

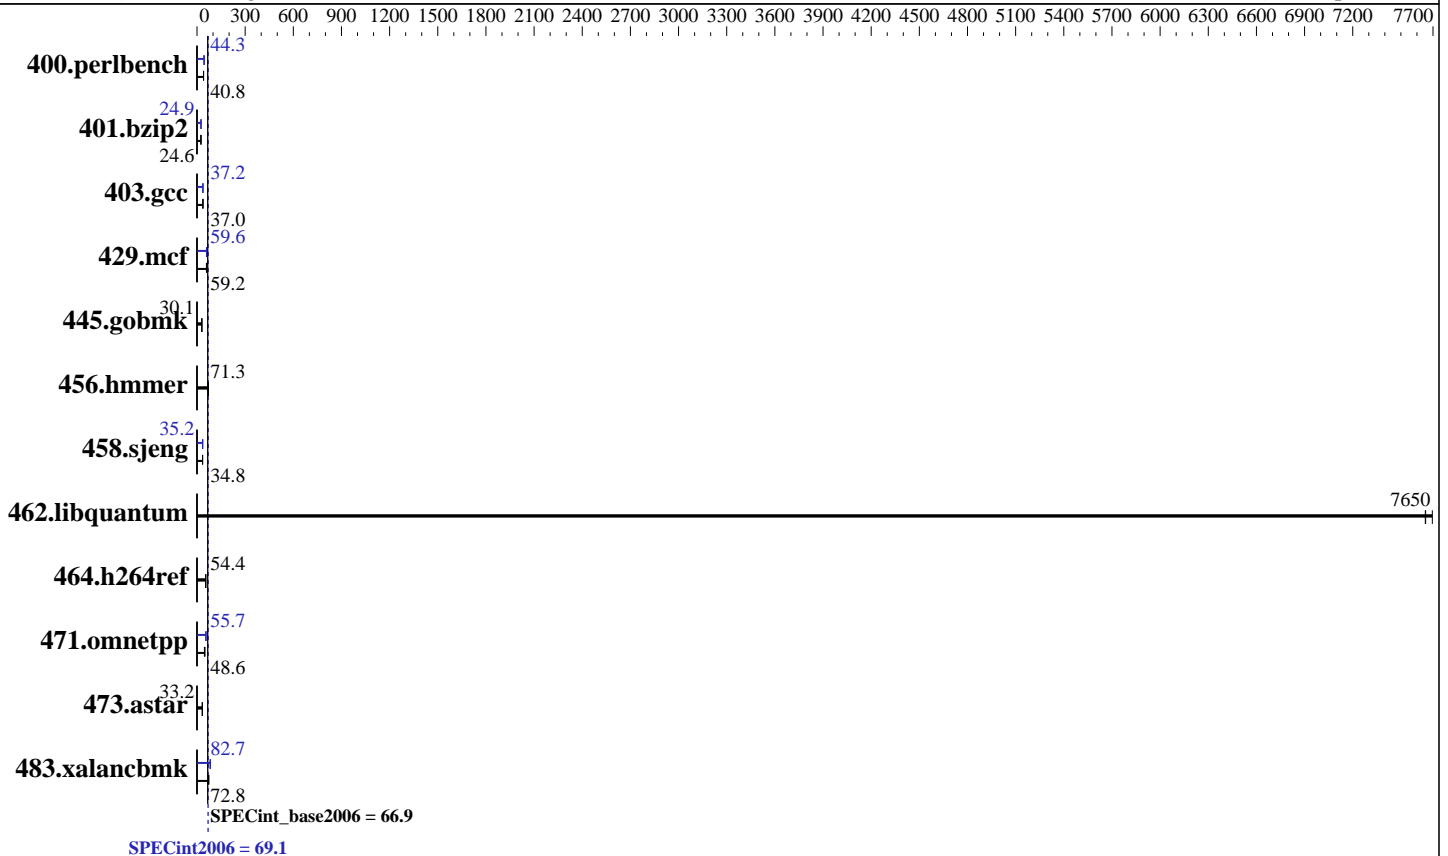

Hardware

CPU Name: Intel Xeon E5-2699 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip
 CPU(s) orderable: 1x/4E2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 2 x 250 GB SATA, RAID 0
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = **69.1**

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = **66.9**

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2015
Hardware Availability: May-2015
Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	238	41.0	<u>239</u>	<u>40.8</u>	241	40.5	<u>221</u>	<u>44.3</u>	222	44.0	221	44.3
401.bzip2	395	24.5	<u>392</u>	<u>24.6</u>	390	24.7	<u>387</u>	<u>24.9</u>	387	24.9	387	25.0
403.gcc	218	36.9	218	37.0	<u>218</u>	<u>37.0</u>	216	37.3	<u>217</u>	<u>37.2</u>	220	36.6
429.mcf	151	60.2	<u>154</u>	<u>59.2</u>	156	58.6	153	59.8	<u>153</u>	<u>59.6</u>	155	59.0
445.gobmk	348	30.2	<u>348</u>	<u>30.1</u>	349	30.1	348	30.2	<u>348</u>	<u>30.1</u>	349	30.1
456.hmmr	<u>131</u>	<u>71.3</u>	131	71.2	131	71.3	<u>131</u>	<u>71.3</u>	131	71.2	131	71.3
458.sjeng	<u>348</u>	<u>34.8</u>	348	34.8	349	34.7	343	35.2	344	35.2	<u>344</u>	<u>35.2</u>
462.libquantum	<u>2.71</u>	<u>7650</u>	2.69	7700	2.71	7650	<u>2.71</u>	<u>7650</u>	2.69	7700	2.71	7650
464.h264ref	406	54.5	407	54.4	<u>407</u>	<u>54.4</u>	406	54.5	407	54.4	<u>407</u>	<u>54.4</u>
471.omnetpp	<u>128</u>	<u>48.6</u>	128	48.9	135	46.2	112	55.6	<u>112</u>	<u>55.7</u>	112	55.7
473.astar	211	33.3	212	33.1	<u>211</u>	<u>33.2</u>	211	33.3	212	33.1	<u>211</u>	<u>33.2</u>
483.xalancbmk	93.8	73.6	<u>94.7</u>	<u>72.8</u>	96.2	71.7	83.6	82.5	<u>83.5</u>	<u>82.7</u>	83.4	82.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Energy Performance set to Performance
Set QPI (QuickPath Interconnect) Snoop Mode as "Home Snoop"(set COD disabled and Early Snoop Disabled)
Set Hyper-Threading to Disabled
POR Disabled
DDR speed set at 2133 MHz
Baseboard Management Controller used to adjust the fan speed to performance mode
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost Mon Nov 30 17:46:07 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
2 "physical id"s (chips)
36 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 69.1

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = 66.9

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2015

Hardware Availability: May-2015

Software Availability: Sep-2015

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 18
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

From /proc/meminfo

```
MemTotal:      264561740 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
```

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

uname -a:

```
Linux localhost 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 28 00:03

SPEC is set to: /home/cpu2006

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3        xfs       888G   20G  868G   3% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 083 01/16/2015

Memory:

```
16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at
2133 MHz
8x NO DIMM NO DIMM
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 69.1

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = 66.9

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2015

Hardware Availability: May-2015

Software Availability: Sep-2015

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "36"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB

memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap64



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 69.1

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = 66.9

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2015

Hardware Availability: May-2015

Software Availability: Sep-2015

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 69.1

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = 66.9

CPU2006 license: 9046

Test date: Nov-2015

Test sponsor: Sugon

Hardware Availability: May-2015

Tested by: Sugon

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml>



SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint2006 = 69.1

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint_base2006 = 66.9

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2015

Hardware Availability: May-2015

Software Availability: Sep-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 15 16:46:40 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2015.