SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint®2006 = 69.1

SPECint_base2006 = 66.9

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2015
Hardware Availability: May-2015
Software Availability: Sep-2015

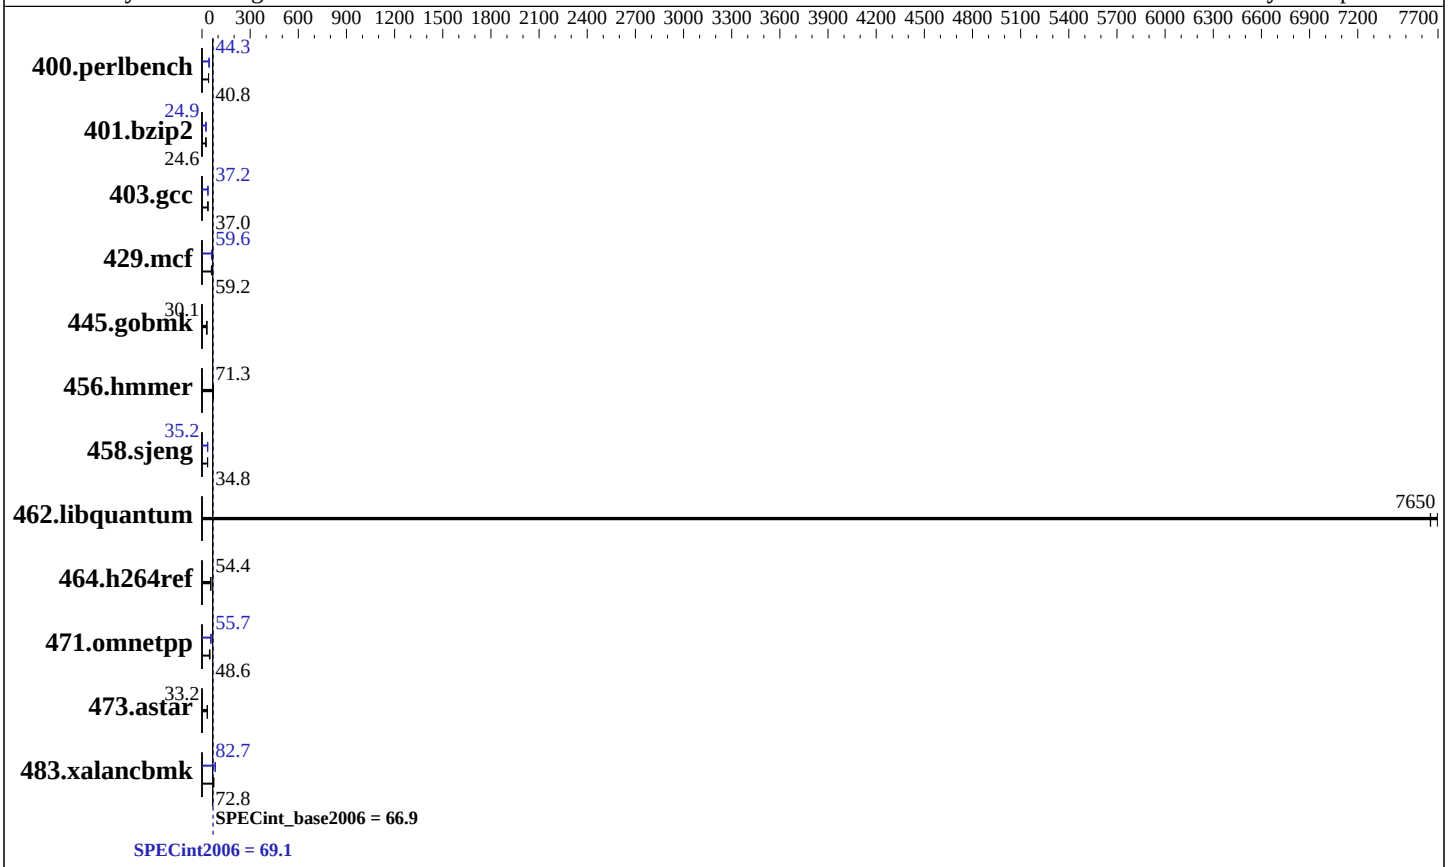

Hardware

CPU Name:	Intel Xeon E5-2699 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	36 cores, 2 chips, 18 cores/chip
CPU(s) orderable:	1ï… 2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	45 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	2 x 250 GB SATA, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

Sugon I610-G20 (Intel Xeon E5-2699 v3)

SPECint2006 = 69.1

SPECint_base2006 = 66.9

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Nov-2015
Hardware Availability: May-2015
Software Availability: Sep-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	238	41.0	**239**	**40.8**	241	40.5	**221**	**44.3**	222	44.0	221	44.3
401.bzip2	395	24.5	**392**	**24.6**	390	24.7	**387**	**24.9**	387	24.9	387	25.0
403.gcc	218	36.9	218	37.0	**218**	**37.0**	216	37.3	**217**	**37.2**	220	36.6
429.mcf	151	60.2	**154**	**59.2**	156	58.6	153	59.8	**153**	**59.6**	155	59.0
445.gobmk	348	30.2	**348**	**30.1**	349	30.1	348	30.2	**348**	**30.1**	349	30.1
456.hmmer	**131**	**71.3**	131	71.2	131	71.3	**131**	**71.3**	131	71.2	131	71.3
458.sjeng	**348**	**34.8**	348	34.8	349	34.7	343	35.2	344	35.2	**344**	**35.2**
462.libquantum	**2.71**	**7650**	2.69	7700	2.71	7650	**2.71**	**7650**	2.69	7700	2.71	7650
464.h264ref	406	54.5	407	54.4	**407**	**54.4**	406	54.5	407	54.4	**407**	**54.4**
471.omnetpp	**128**	**48.6**	128	48.9	135	46.2	112	55.6	**112**	**55.7**	112	55.7
473.astar	211	33.3	212	33.1	**211**	**33.2**	211	33.3	212	33.1	**211**	**33.2**
483.xalancbmk	93.8	73.6	**94.7**	**72.8**	96.2	71.7	83.6	82.5	**83.5**	**82.7**	83.4	82.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Energy Performance set to Performance
Set QPI (QuickPath Interconnect) Snoop Mode as "Home Snoop"(set COD disabled and Early Snoop Disabled)
Set Hyper-Threading to Disabled
POR Disabled
DDR speed set at 2133 MHz
Baseboard Management Controller used to adjust the fan speed to performance mode
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost Mon Nov 30 17:46:07 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v3 @ 2.30GHz
      2 "physical id"s (chips)
      36 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 18
         siblings  : 18
         physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
         physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      cache size : 46080 KB

   From /proc/meminfo
      MemTotal:       264561740 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 0
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12"
         VERSION_ID="12"
         PRETTY_NAME="SUSE Linux Enterprise Server 12"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12"

   uname -a:
      Linux localhost 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
      (9879bd4) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Nov 28 00:03

   SPEC is set to: /home/cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda3      xfs   888G   20G  868G   3% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. 083 01/16/2015
     Memory:
      16x Hynix Semiconductor HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at
      2133 MHz
      8x NO DIMM NO DIMM
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"
OMP_NUM_THREADS = "36"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-opt-prefetch`
`-ansi-alias`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-auto-ilp32`
`-opt-prefetch -ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revA.20141203.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 15 16:46:40 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 December 2015.