



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

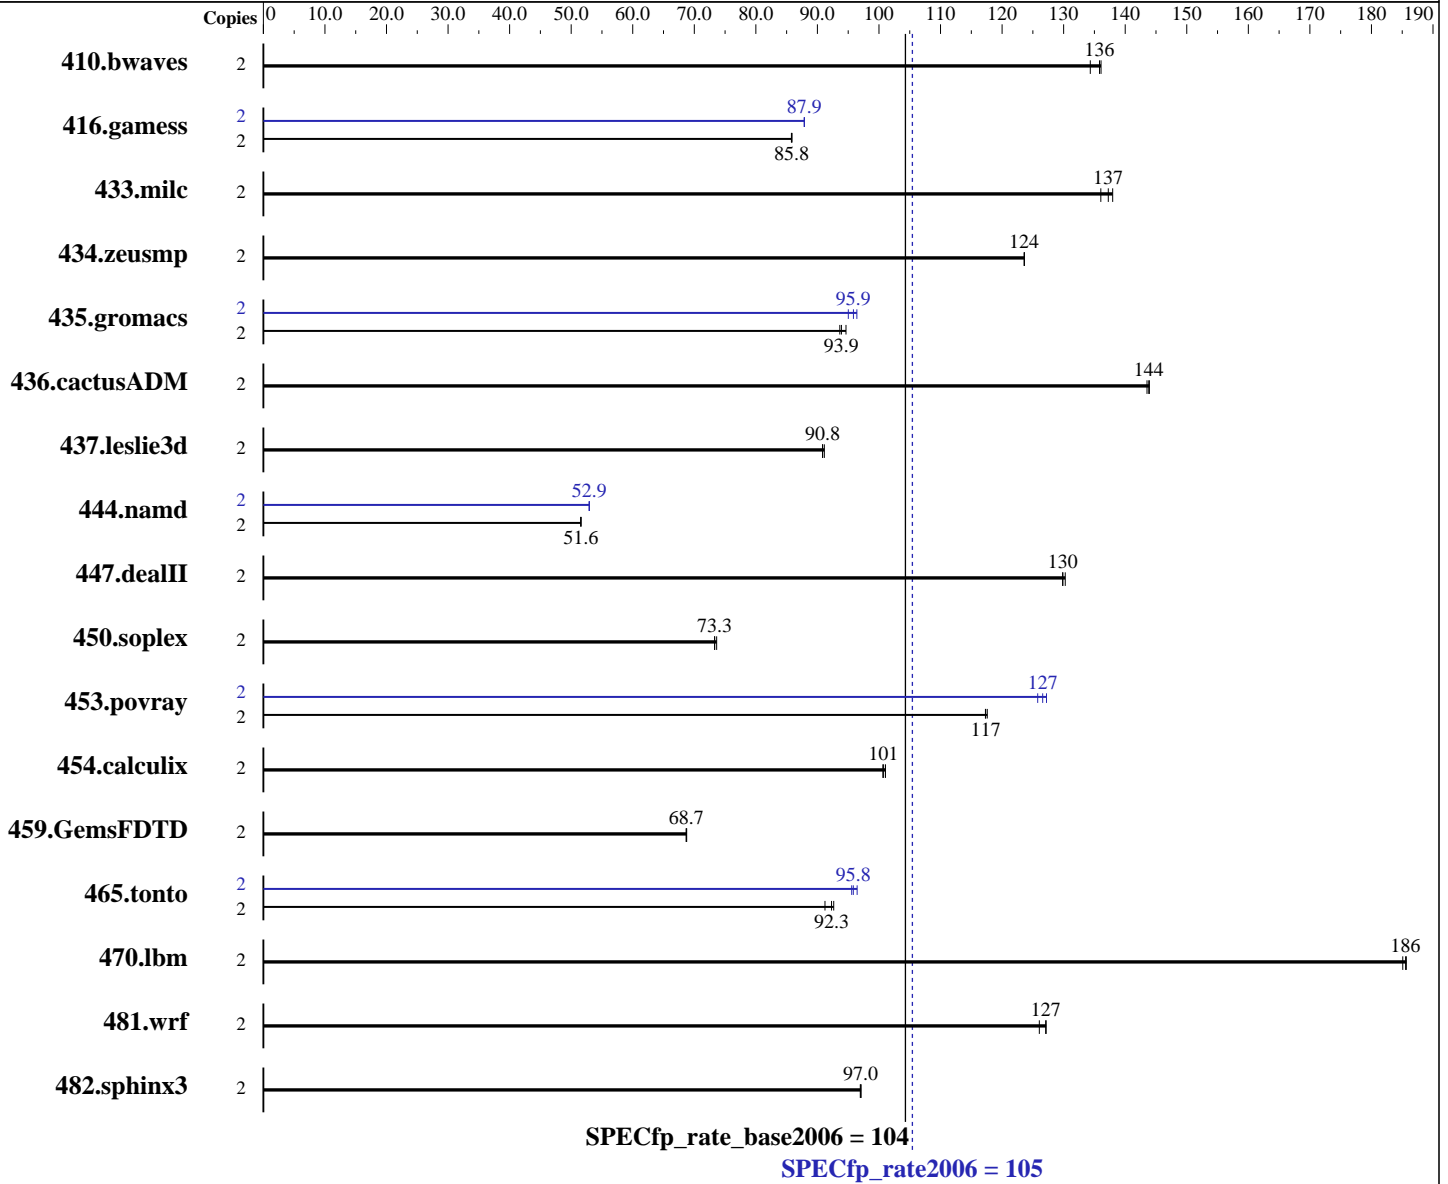

Hardware

CPU Name: Intel Pentium G4400
 CPU Characteristics:
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.48-52.27-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	202	134	200	136	<u>200</u>	<u>136</u>	2	202	134	200	136	<u>200</u>	<u>136</u>
416.gamess	2	<u>456</u>	<u>85.8</u>	457	85.8	456	85.9	2	446	87.9	446	87.9	<u>446</u>	<u>87.9</u>
433.milc	2	135	136	<u>134</u>	<u>137</u>	133	138	2	135	136	<u>134</u>	<u>137</u>	133	138
434.zeusmp	2	147	124	147	124	<u>147</u>	<u>124</u>	2	147	124	147	124	<u>147</u>	<u>124</u>
435.gromacs	2	153	93.6	151	94.6	<u>152</u>	<u>93.9</u>	2	<u>149</u>	<u>95.9</u>	150	95.0	148	96.4
436.cactusADM	2	167	144	166	144	<u>166</u>	<u>144</u>	2	167	144	166	144	<u>166</u>	<u>144</u>
437.leslie3d	2	207	90.8	<u>207</u>	<u>90.8</u>	206	91.1	2	207	90.8	<u>207</u>	<u>90.8</u>	206	91.1
444.namd	2	<u>311</u>	<u>51.6</u>	311	51.6	311	51.6	2	<u>303</u>	<u>52.9</u>	303	53.0	303	52.9
447.dealII	2	176	130	176	130	<u>176</u>	<u>130</u>	2	176	130	176	130	<u>176</u>	<u>130</u>
450.soplex	2	227	73.6	228	73.3	<u>228</u>	<u>73.3</u>	2	227	73.6	228	73.3	<u>228</u>	<u>73.3</u>
453.povray	2	90.5	118	<u>90.7</u>	<u>117</u>	90.7	117	2	83.6	127	<u>84.0</u>	<u>127</u>	84.6	126
454.calculix	2	163	101	164	101	<u>164</u>	<u>101</u>	2	163	101	164	101	<u>164</u>	<u>101</u>
459.GemsFDTD	2	309	68.8	309	68.7	<u>309</u>	<u>68.7</u>	2	309	68.8	309	68.7	<u>309</u>	<u>68.7</u>
465.tonto	2	216	91.2	<u>213</u>	<u>92.3</u>	212	92.6	2	204	96.5	206	95.6	<u>205</u>	<u>95.8</u>
470.lbm	2	<u>148</u>	<u>186</u>	148	185	148	186	2	<u>148</u>	<u>186</u>	148	185	148	186
481.wrf	2	176	127	177	126	<u>176</u>	<u>127</u>	2	176	127	177	126	<u>176</u>	<u>127</u>
482.sphinx3	2	401	97.1	<u>402</u>	<u>97.0</u>	402	97.0	2	401	97.1	<u>402</u>	<u>97.0</u>	402	97.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Sysinfo program /home/SPECcpu2006/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

Platform Notes (Continued)

running on RX1330M2 Thu Nov 26 00:24:55 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Pentium(R) CPU G4400 @ 3.30GHz
 1 "physical id"s (chips)
 2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 2
  siblings  : 2
  physical 0: cores 0 1
  cache size : 3072 KB
```

```
From /proc/meminfo
MemTotal:      65905868 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"
```

```
uname -a:
Linux RX1330M2 3.12.48-52.27-default #1 SMP Mon Oct 5 10:08:10 UTC 2015
(314f0e3) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Nov 25 16:23
```

```
SPEC is set to: /home/SPECcpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   889G  12G  878G   2% /home
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Nov-2015
Hardware Availability: Feb-2016
Software Availability: Sep-2015

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.0.0 for D3375-A1x
10/27/2015

Memory:
4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/SPECcpu2006/libs/32:/home/SPECcpu2006/libs/64:/home/SPECcpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19

Test date: Nov-2015

Test sponsor: Fujitsu

Hardware Availability: Feb-2016

Tested by: Fujitsu

Software Availability: Sep-2015

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -unroll4 -auto -inline-alloc
-opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 105

PRIMERGY RX1330 M2, Intel Pentium G4400, 3.30 GHz

SPECfp_rate_base2006 = 104

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2015

Hardware Availability: Feb-2016

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-HSW-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 30 19:58:23 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 December 2015.