



SPEC[®] CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECint[®]_rate2006 = 22600

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECint_rate_base2006 = 21600

CPU2006 license: 4


Test date: Dec-2015

Test sponsor: SGI

Hardware Availability: Sep-2015

Tested by: SGI

Software Availability: Nov-2015

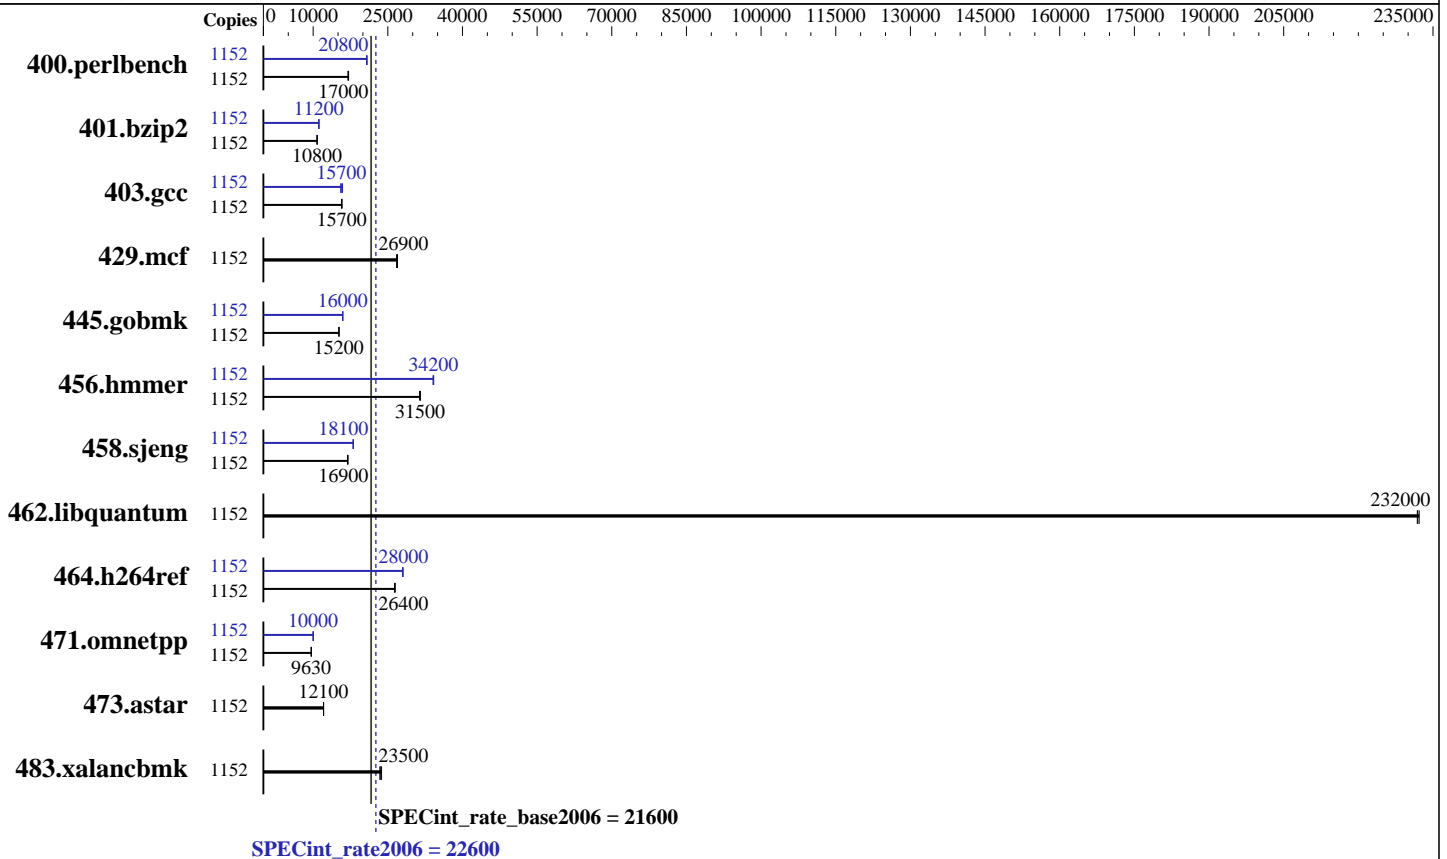

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 576 cores, 32 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4-64 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 TB (512 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 16 TB tmpfs
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP4, Kernel 3.0.101-65.1.9552.0.PTF-default
 Compiler: C/C++; Version 16.0.0.109 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECint_rate2006 = 22600

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECint_rate_base2006 = 21600

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Nov-2015

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1152	662	17000	657	17100	660	17000	1152	540	20800	543	20700	541	20800
401.bzip2	1152	1029	10800	1031	10800	1028	10800	1152	997	11200	996	11200	998	11100
403.gcc	1152	589	15700	591	15700	587	15800	1152	590	15700	583	15900	598	15500
429.mcf	1152	391	26900	392	26800	390	26900	1152	391	26900	392	26800	390	26900
445.gobmk	1152	795	15200	796	15200	796	15200	1152	759	15900	757	16000	758	16000
456.hammer	1152	341	31500	341	31500	342	31400	1152	314	34200	314	34200	315	34100
458.sjeng	1152	820	17000	823	16900	823	16900	1152	773	18000	772	18100	772	18100
462.libquantum	1152	103	232000	103	232000	103	232000	1152	103	232000	103	232000	103	232000
464.h264ref	1152	967	26400	962	26500	967	26400	1152	910	28000	909	28100	911	28000
471.omnetpp	1152	748	9630	748	9630	750	9600	1152	719	10000	720	10000	719	10000
473.astar	1152	668	12100	669	12100	669	12100	1152	668	12100	669	12100	669	12100
483.xalancbmk	1152	339	23500	335	23700	339	23400	1152	339	23500	335	23700	339	23400

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem set up with:

```
mkdir -p /mnt/shm/cpu2006-ic16
mount -t tmpfs -o size=16384G,rw tmpfs /mnt/shm/cpu2006-ic16
```

Turbo mode activated with:

```
modprobe acpi_cpufreq
cpupower frequency-set -u 3300MHz -d 3300MHz -g performance
```

Platform Notes

BT Mode set to Auto-select

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/mnt/shm/cpu2006-ic16/libs/32:/mnt/shm/cpu2006-ic16/libs/64:/mnt/shm/cpu2006-ic16/sh"
```

Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECint_rate2006 = 22600

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECint_rate_base2006 = 21600

CPU2006 license: 4

Test date: Dec-2015

Test sponsor: SGI

Hardware Availability: Sep-2015

Tested by: SGI

Software Availability: Nov-2015

General Notes (Continued)

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/sw/sdev/intel/parallel_studio_xe_2016/compilers_and_libraries/linux/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/sw/sdev/intel/parallel_studio_xe_2016/compilers_and_libraries/linux/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs
-L/root/cpu2006-ic16/sh -lsmartheap
```

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECint_rate2006 = 22600

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECint_rate_base2006 = 21600

CPU2006 license: 4

Test date: Dec-2015

Test sponsor: SGI

Hardware Availability: Sep-2015

Tested by: SGI

Software Availability: Nov-2015

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/sw/sdev/intel/parallel_studio_xe_2016/compilers_and_libraries/linux/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/sw/sdev/intel/parallel_studio_xe_2016/compilers_and_libraries/linux/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECint_rate2006 = 22600

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECint_rate_base2006 = 21600

CPU2006 license: 4

Test date: Dec-2015

Test sponsor: SGI

Hardware Availability: Sep-2015

Tested by: SGI

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/root/cpu2006-ic16/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.20160112.html>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECint_rate2006 = 22600

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECint_rate_base2006 = 21600

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Nov-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.20160112.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 12 15:45:54 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 January 2016.