



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp®_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Nov-2015

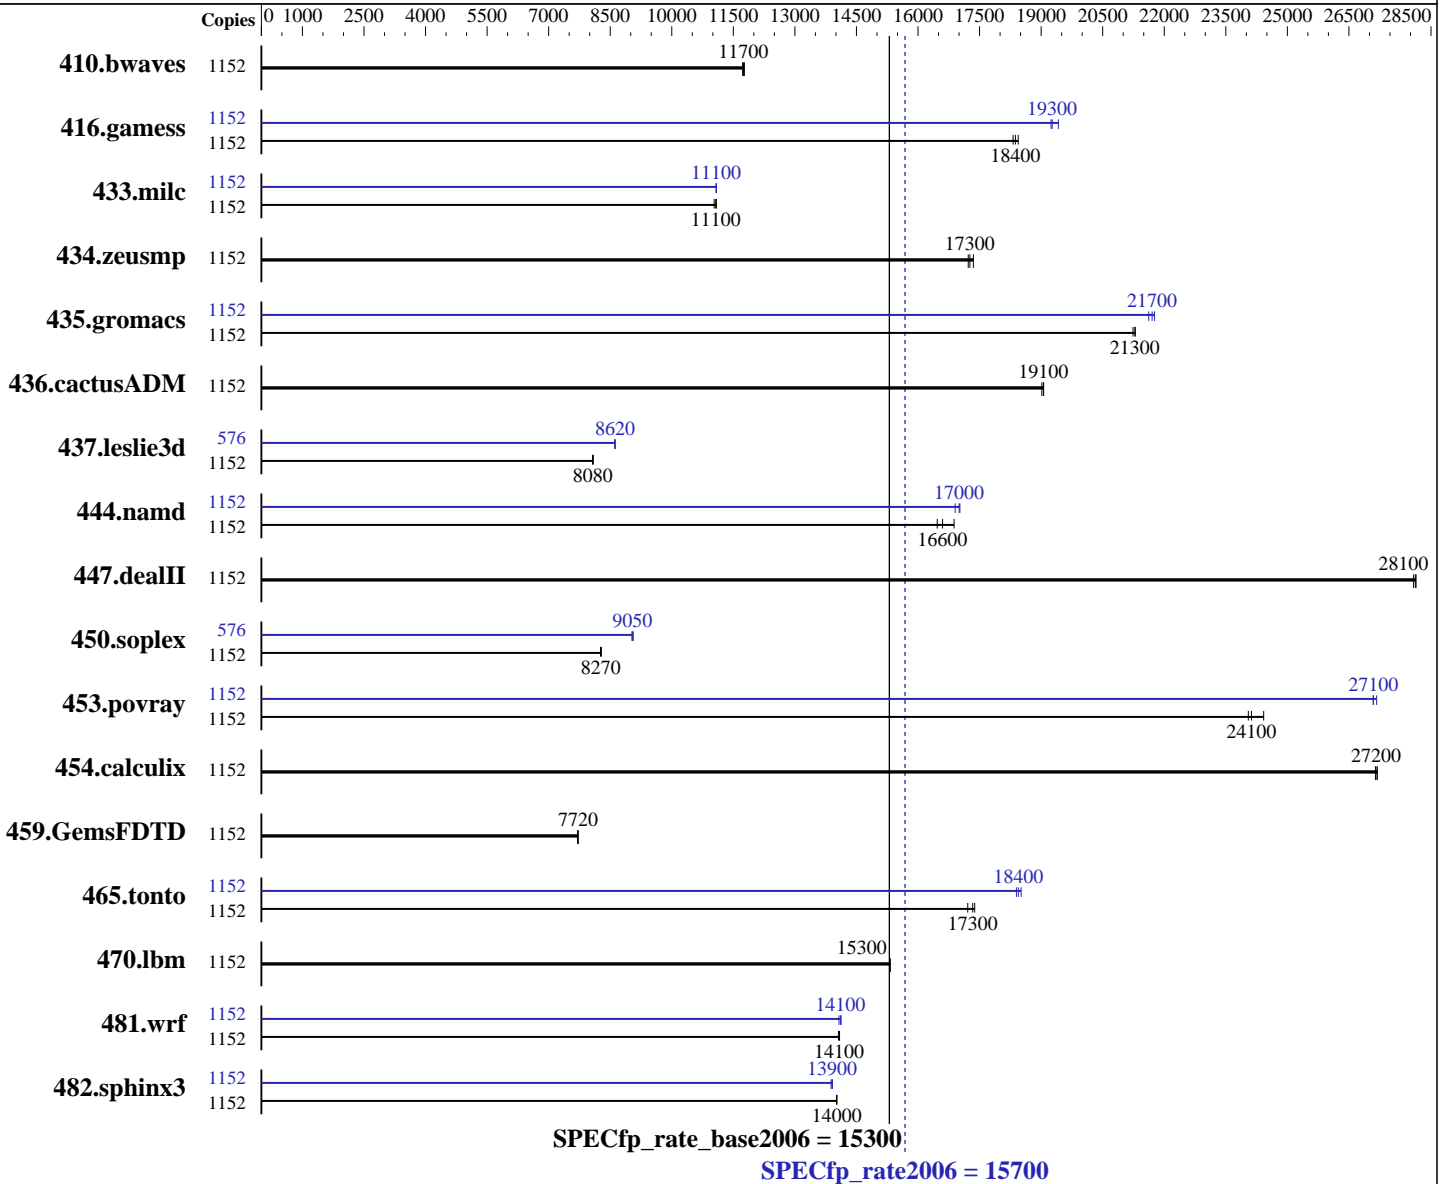

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 576 cores, 32 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4-64 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP4, Kernel 3.0.101-65.1.9552.0.PTF-default
 Compiler: C/C++: Version 15.0.3.187 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.3.187 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: tmpfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Dec-2015
Hardware Availability: Sep-2015
Software Availability: Nov-2015

L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 16 TB (512 x 32 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 16 TB tmpfs
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	1152	1333	11700	1335	11700	1330	11800	1152	1333	11700	1335	11700	1330	11800
416.gamess	1152	1231	18300	1228	18400	1223	18400	1152	1170	19300	1161	19400	1172	19200
433.milc	1152	954	11100	955	11100	959	11000	1152	954	11100	954	11100	954	11100
434.zeusmp	1152	609	17200	604	17300	607	17300	1152	609	17200	604	17300	607	17300
435.gromacs	1152	386	21300	386	21300	387	21200	1152	379	21700	378	21800	380	21600
436.cactusADM	1152	722	19100	722	19100	724	19000	1152	722	19100	722	19100	724	19000
437.leslie3d	1152	1341	8080	1339	8090	1342	8070	576	628	8620	629	8610	628	8620
444.namd	1152	547	16900	557	16600	561	16500	1152	543	17000	543	17000	547	16900
447.dealII	1152	469	28100	469	28100	468	28100	1152	469	28100	469	28100	468	28100
450.soplex	1152	1160	8280	1161	8270	1163	8260	576	531	9050	530	9060	532	9030
453.povray	1152	254	24100	255	24000	251	24400	1152	226	27100	226	27100	226	27200
454.calculix	1152	349	27200	350	27200	350	27100	1152	349	27200	350	27200	350	27100
459.GemsFDTD	1152	1584	7720	1586	7710	1584	7720	1152	1584	7720	1586	7710	1584	7720
465.tonto	1152	659	17200	654	17300	652	17400	1152	615	18400	616	18400	612	18500
470.lbm	1152	1034	15300	1034	15300	1033	15300	1152	1034	15300	1034	15300	1033	15300
481.wrf	1152	915	14100	913	14100	914	14100	1152	911	14100	912	14100	914	14100
482.sphinx3	1152	1602	14000	1601	14000	1602	14000	1152	1614	13900	1617	13900	1615	13900

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem set up with:

```
mkdir -p /mnt/shm/cpu2006-ic15
mount -t tmpfs -o size=16384G,rw tmpfs /mnt/shm/cpu2006-ic15
```

Turbo mode activated with:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4

Test date: Dec-2015

Test sponsor: SGI

Hardware Availability: Sep-2015

Tested by: SGI

Software Availability: Nov-2015

Operating System Notes (Continued)

```
modprobe acpi_cpufreq
cpupower frequency-set -u 3300MHz -d 3300MHz -g performance
```

Platform Notes

BT Mode set to Auto-select

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/mnt/shm/cpu2006-ic15/libs/32:/mnt/shm/cpu2006-ic15/libs/64:/mnt/shm/cpu2006-ic15/sh"
```

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4

Test date: Dec-2015

Test sponsor: SGI

Hardware Availability: Sep-2015

Tested by: SGI

Software Availability: Nov-2015

Base Portability Flags (Continued)

```

453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/sw/sdev/intel/parallel_studio_xe_2015_update_3/composer_xe_2015.3.187/compiler/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Nov-2015

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Dec-2015
Hardware Availability: Sep-2015
Software Availability: Nov-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.20160112.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/SGI-UV300-Platform-Flags.20160112.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = 15700

SGI UV 300 (Intel Xeon E7-8890 v3, 2.5 GHz)

SPECfp_rate_base2006 = 15300

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 12 15:45:51 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 January 2016.