



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

SPECint®2006 = 62.1

SPECint\_base2006 = 60.6

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

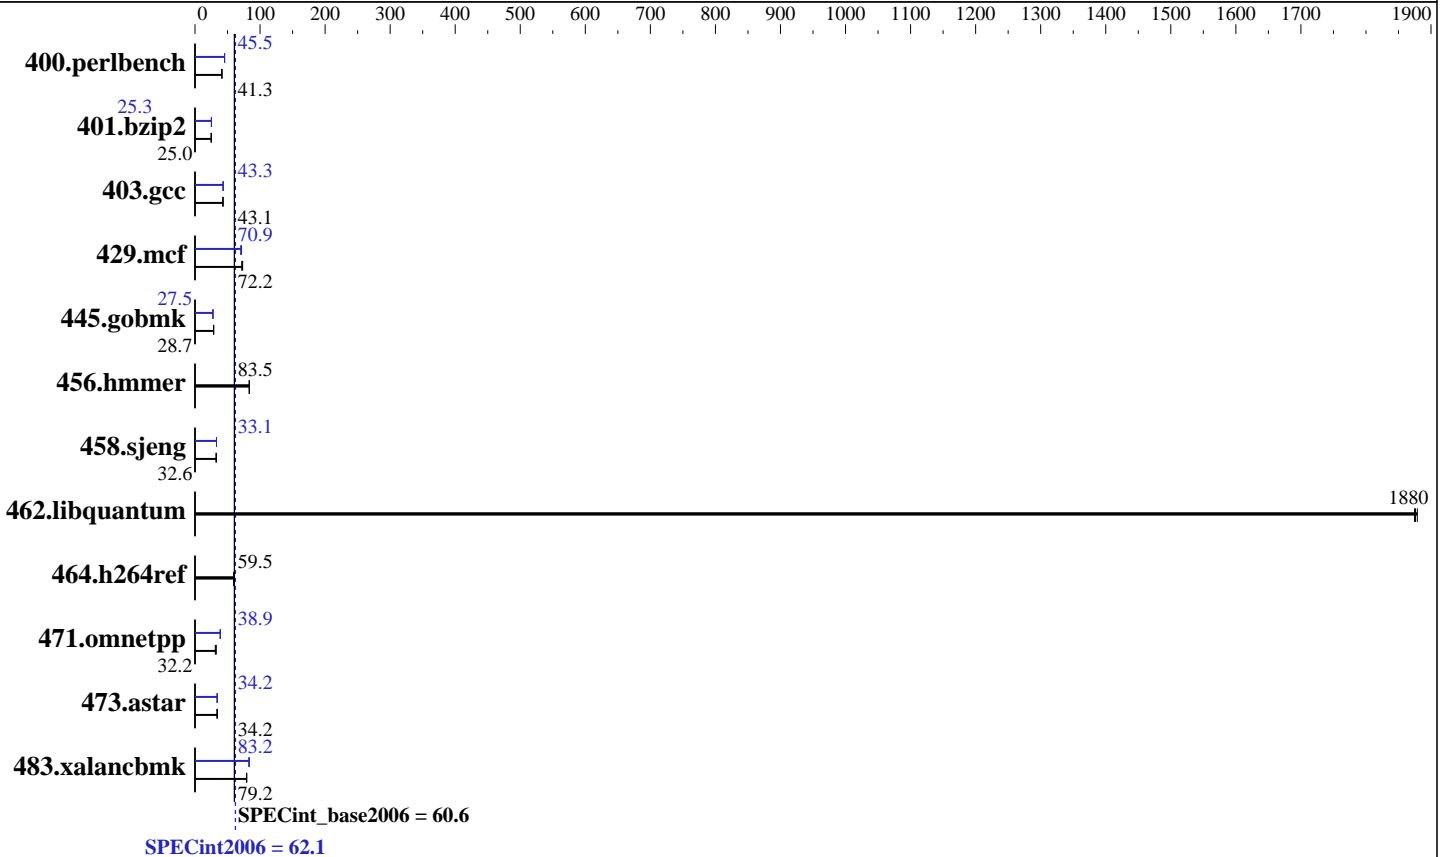

### Hardware

CPU Name: Intel Xeon E3-1240L v5  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (2 x 16 GB 2Rx8 PC4-2133P-E)  
 Disk Subsystem: 1 x 400 GB SATA III SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

SPECint2006 = **62.1**

SPECint\_base2006 = **60.6**

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b><u>237</u></b>	<b><u>41.3</u></b>	238	41.1	235	41.5	215	45.4	215	45.5	<b><u>215</u></b>	<b><u>45.5</u></b>
401.bzip2	<b><u>387</u></b>	<b><u>25.0</u></b>	387	24.9	386	25.0	382	25.2	382	25.3	<b><u>382</u></b>	<b><u>25.3</u></b>
403.gcc	187	43.1	<b><u>187</u></b>	<b><u>43.1</u></b>	188	42.9	186	43.4	187	43.1	<b><u>186</u></b>	<b><u>43.3</u></b>
429.mcf	<b><u>126</u></b>	<b><u>72.2</u></b>	126	72.2	124	73.3	130	70.3	127	71.6	<b><u>129</u></b>	<b><u>70.9</u></b>
445.gobmk	<b><u>366</u></b>	<b><u>28.7</u></b>	366	28.7	366	28.6	381	27.5	<b><u>381</u></b>	<b><u>27.5</u></b>	381	27.5
456.hammer	112	83.6	<b><u>112</u></b>	<b><u>83.5</u></b>	112	83.3	112	83.6	<b><u>112</u></b>	<b><u>83.5</u></b>	112	83.3
458.sjeng	<b><u>371</u></b>	<b><u>32.6</u></b>	371	32.6	371	32.6	367	33.0	<b><u>366</u></b>	<b><u>33.1</u></b>	366	33.1
462.libquantum	11.0	1880	11.1	1870	<b><u>11.0</u></b>	<b><u>1880</u></b>	11.0	1880	11.1	1870	<b><u>11.0</u></b>	<b><u>1880</u></b>
464.h264ref	372	59.5	372	59.5	<b><u>372</u></b>	<b><u>59.5</u></b>	372	59.5	372	59.5	<b><u>372</u></b>	<b><u>59.5</u></b>
471.omnetpp	200	31.2	<b><u>194</u></b>	<b><u>32.2</u></b>	192	32.5	<b><u>161</u></b>	<b><u>38.9</u></b>	161	38.9	161	38.8
473.astar	205	34.2	207	33.9	<b><u>206</u></b>	<b><u>34.2</u></b>	<b><u>206</u></b>	<b><u>34.2</u></b>	205	34.3	207	34.0
483.xalancbmk	87.2	79.2	<b><u>87.1</u></b>	<b><u>79.2</u></b>	86.6	79.7	<b><u>82.9</u></b>	<b><u>83.2</u></b>	82.8	83.3	83.3	82.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

As tested, the system used a Supermicro CSE-113MFAC2-R606CB chassis. The chassis is configured with 2 PWS-606P-1R redundant power supply, 1 SNK-P0046P heatsink, as well as 4 FAN-0154L4 middle cooling fan.

BIOS Settings:

Hyper-threading = Disabled

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on X10SRA-01 Mon Jan 4 19:21:57 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1240L v5 @ 2.10GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

SPECint2006 = 62.1

SPECint\_base2006 = 60.6

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Sep-2015

### Platform Notes (Continued)

```
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:      32768808 kB
HugePages_Total:    0
Hugepagesize:   2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.1 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.1"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux X10SRA-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 4 19:18
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   183G  5.2G 178G   3% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 1.0b 12/22/2015
Memory:
  2x Not Specified Not Specified
  2x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

SPECint2006 = 62.1

SPECint\_base2006 = 60.6

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Sep-2015

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32

-Wl,-z,muldefs -L/sh -lsmarheap64



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

SPECint2006 = 62.1

SPECint\_base2006 = 60.6

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2016  
Hardware Availability: Oct-2015  
Software Availability: Sep-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

445.gobmk: icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

**SPECint2006 = 62.1**

**SPECint\_base2006 = 60.6**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

401.bzip2 (continued):

`-opt-prefetch -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc`

`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel`

`-opt-prefetch -auto-p32`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`

`-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias`

456.hmmcr: `basepeak = yes`

458.sjeng: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`

`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`

`-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`

`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`

`-par-num-threads=1(pass 1) -prof-use(pass 2)`

`-opt-ra-region-strategy=block`

`-ansi-alias`

`-Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

`-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64`

483.xalancbmk: `-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

`-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

Supermicro X11SSM-F motherboard  
(X11SSM-F, Intel Xeon E3-1240L v5)

**SPECint2006 = 62.1**

**SPECint\_base2006 = 60.6**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2016

**Hardware Availability:** Oct-2015

**Software Availability:** Sep-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 26 15:11:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 January 2016.