



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp®\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

CPU2006 license: 001176


Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Aug-2015

Tested by: Supermicro

Software Availability: Sep-2015

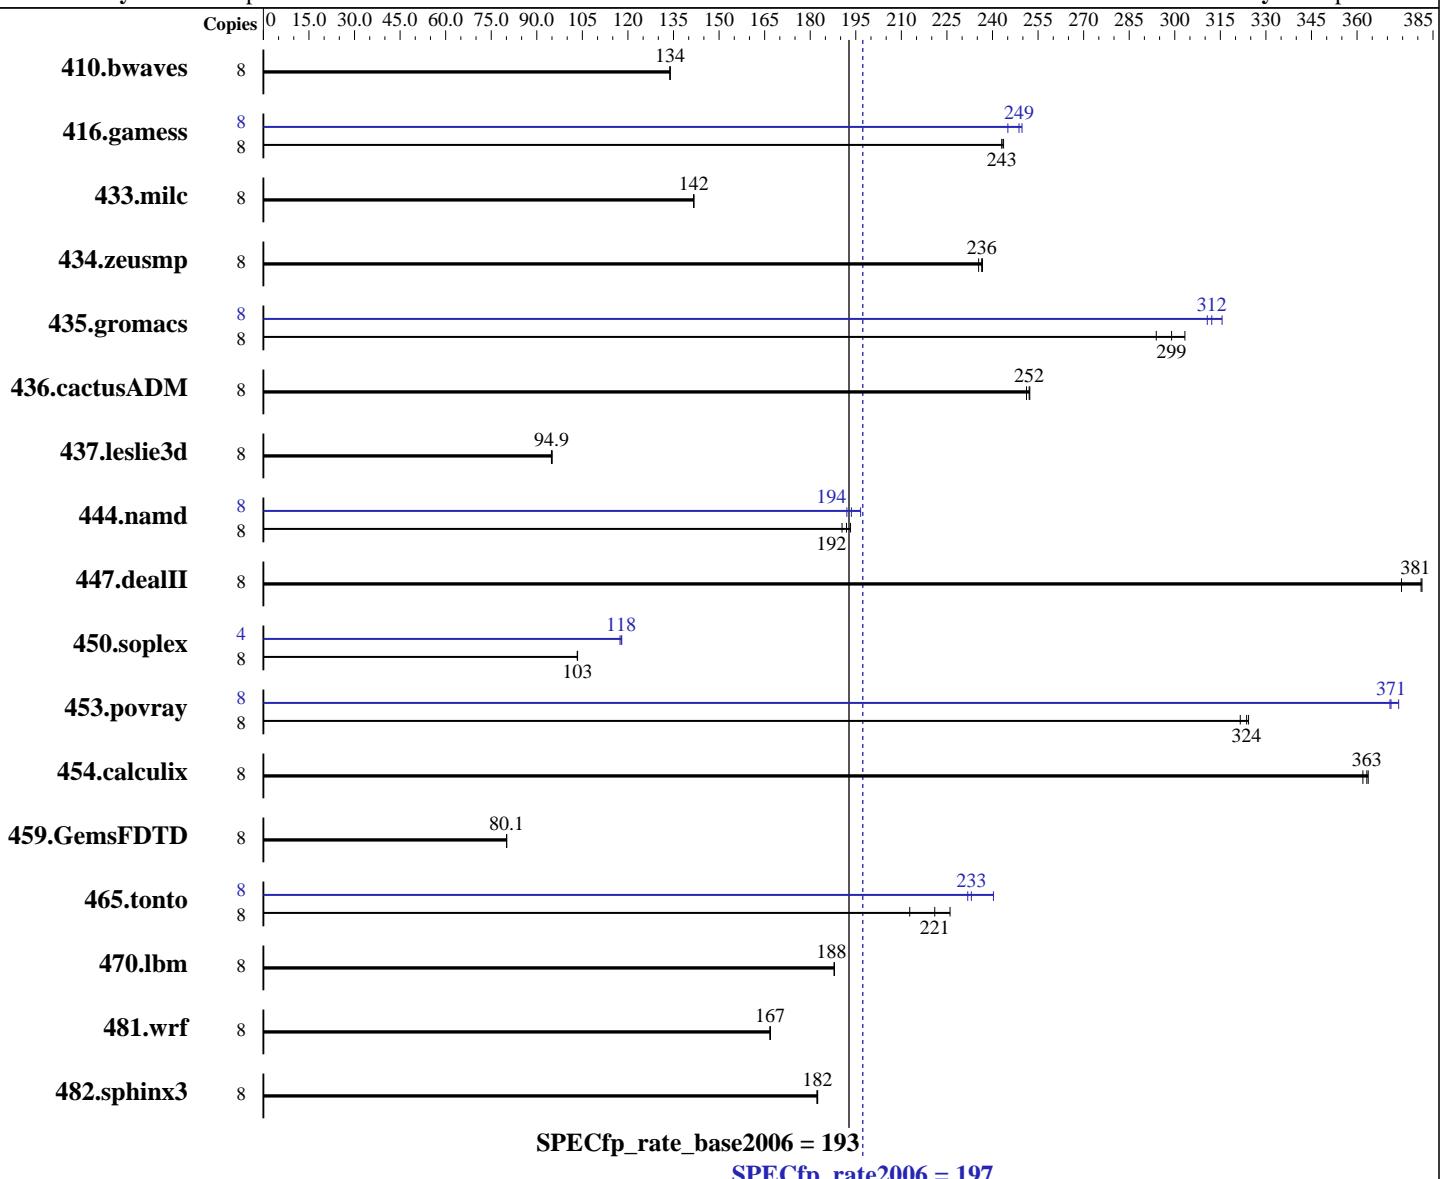

### Hardware

CPU Name: Intel Core i7-6700K  
CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz  
CPU MHz: 4000  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86\_64  
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 001176

**Test date:** Jan-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Aug-2015

**Tested by:** Supermicro

**Software Availability:** Sep-2015

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2133P-E)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	812	134	812	134	<b>812</b>	<b>134</b>	8	812	134	812	134	<b>812</b>	<b>134</b>
416.gamess	8	<b>644</b>	<b>243</b>	643	244	644	243	8	639	245	<b>630</b>	<b>249</b>	627	250
433.milc	8	518	142	519	142	<b>518</b>	<b>142</b>	8	518	142	519	142	<b>518</b>	<b>142</b>
434.zeusmp	8	<b>308</b>	<b>236</b>	309	235	308	237	8	<b>308</b>	<b>236</b>	309	235	308	237
435.gromacs	8	<b>191</b>	<b>299</b>	188	303	194	294	8	184	311	181	316	<b>183</b>	<b>312</b>
436.cactusADM	8	381	251	379	252	<b>379</b>	<b>252</b>	8	381	251	379	252	<b>379</b>	<b>252</b>
437.leslie3d	8	791	95.1	<b>793</b>	<b>94.9</b>	793	94.8	8	791	95.1	<b>793</b>	<b>94.9</b>	793	94.8
444.namd	8	337	190	332	193	<b>334</b>	<b>192</b>	8	<b>331</b>	<b>194</b>	326	197	334	192
447.dealII	8	240	381	244	375	<b>240</b>	<b>381</b>	8	240	381	244	375	<b>240</b>	<b>381</b>
450.soplex	8	<b>645</b>	<b>103</b>	646	103	645	103	4	283	118	<b>283</b>	<b>118</b>	284	117
453.povray	8	131	324	132	322	<b>131</b>	<b>324</b>	8	<b>115</b>	<b>371</b>	115	371	114	374
454.calculix	8	<b>182</b>	<b>363</b>	182	362	181	364	8	<b>182</b>	<b>363</b>	182	362	181	364
459.GemsFDTD	8	<b>1060</b>	<b>80.1</b>	1060	80.0	1060	80.1	8	<b>1060</b>	<b>80.1</b>	1060	80.0	1060	80.1
465.tonto	8	348	226	<b>356</b>	<b>221</b>	370	213	8	<b>338</b>	<b>233</b>	340	232	328	240
470.lbm	8	585	188	<b>585</b>	<b>188</b>	585	188	8	585	188	<b>585</b>	<b>188</b>	585	188
481.wrf	8	535	167	<b>536</b>	<b>167</b>	536	167	8	535	167	<b>536</b>	<b>167</b>	536	167
482.sphinx3	8	855	182	856	182	<b>855</b>	<b>182</b>	8	855	182	856	182	<b>855</b>	<b>182</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Thu Jan 14 12:34:10 2016

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 001176

**Test date:** Jan-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Aug-2015

**Tested by:** Supermicro

**Software Availability:** Sep-2015

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Core(TM) i7-6700K CPU @ 4.00GHz
        1 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 8
    physical 0: cores 0 1 2 3
    cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:       65581104 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 14 05:06
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   850G   11G  839G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2016

**Hardware Availability:** Aug-2015

**Software Availability:** Sep-2015

## Platform Notes (Continued)

BIOS American Megatrends Inc. 1.0a 12/01/2015

Memory:

4x Samsung M391A2K43BB1-CPB 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2016

**Hardware Availability:** Aug-2015

**Software Availability:** Sep-2015

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 001176

**Test date:** Jan-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Aug-2015

**Tested by:** Supermicro

**Software Availability:** Sep-2015

## Peak Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039A-iL  
(X11SAE , Intel Core i7-6700K)

**SPECfp\_rate2006 = 197**

**SPECfp\_rate\_base2006 = 193**

**CPU2006 license:** 001176

**Test date:** Jan-2016

**Test sponsor:** Supermicro

**Hardware Availability:** Aug-2015

**Tested by:** Supermicro

**Software Availability:** Sep-2015

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 9 17:20:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 February 2016.