



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp®_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Aug-2015

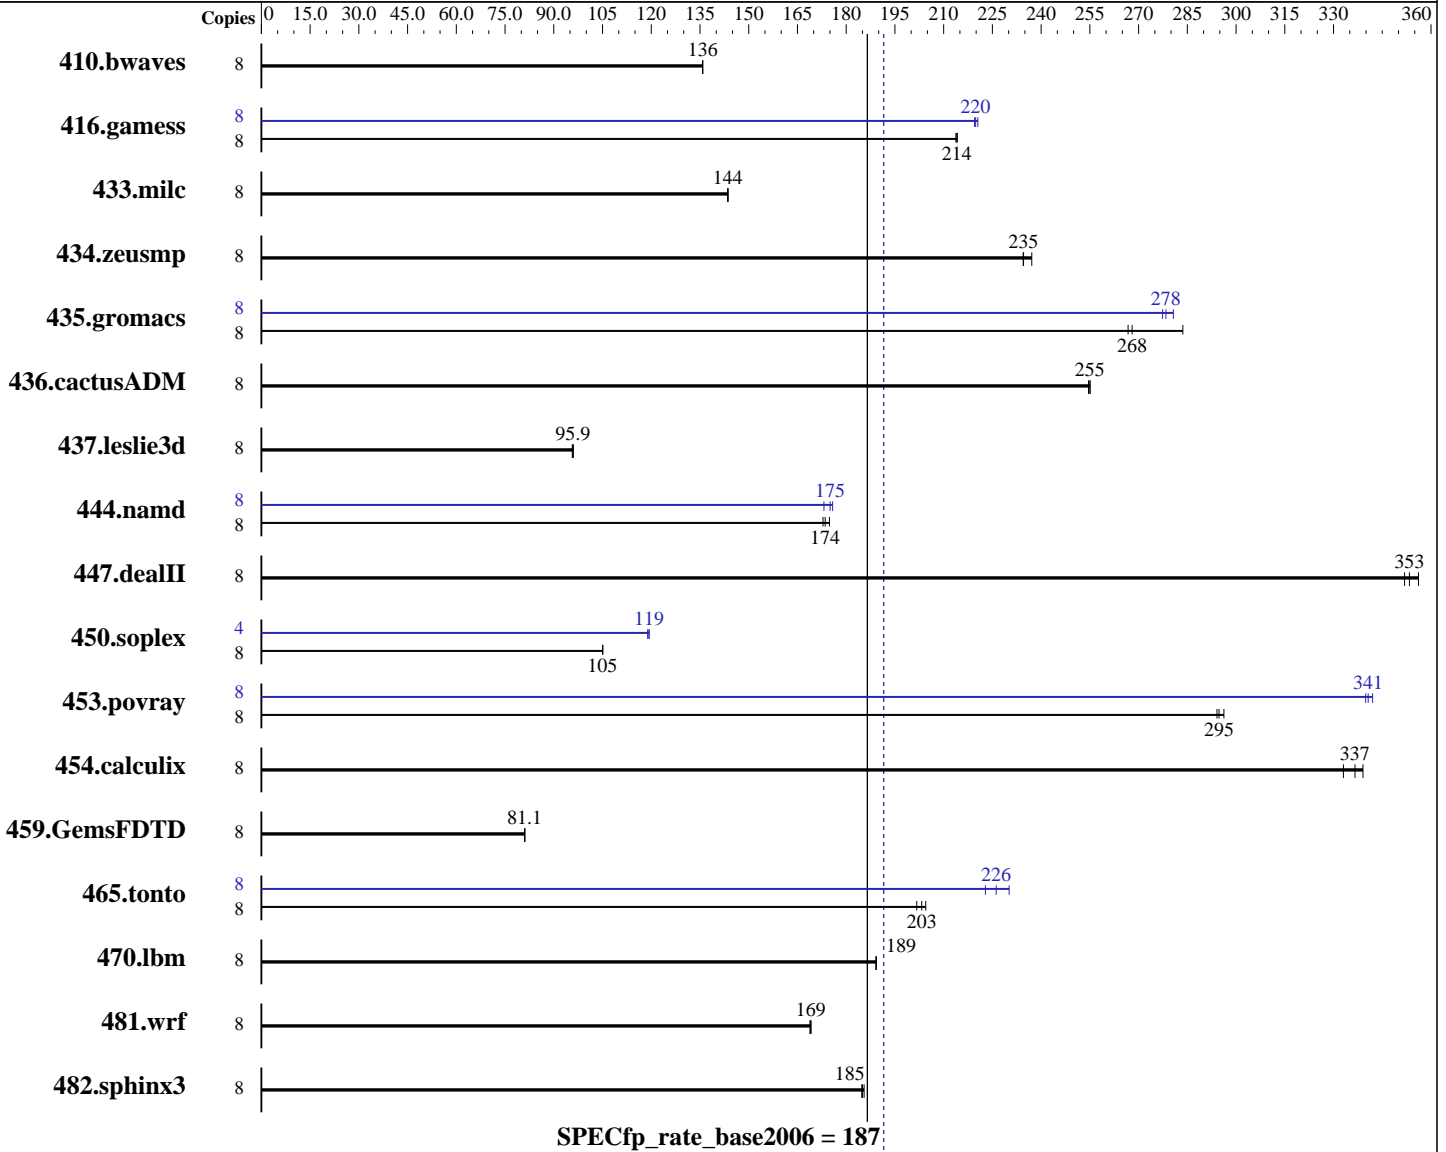

Hardware

CPU Name: Intel Xeon E3-1245 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64)
 Kernel 3.12.28-4-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Aug-2015

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

| Benchmark | Base | | | | | | | | Peak | | | | | | | |
|---------------|--------|-------------|-------------|------------|------------|------------|------------|--------|-------------|-------------|------------|------------|------------|------------|--|--|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | | |
| 410.bwaves | 8 | 800 | 136 | 801 | 136 | 800 | 136 | 8 | 800 | 136 | 801 | 136 | 800 | 136 | | |
| 416.gamess | 8 | 732 | 214 | 733 | 214 | 731 | 214 | 8 | 710 | 221 | 714 | 220 | 713 | 220 | | |
| 433.milc | 8 | 512 | 144 | 512 | 144 | 511 | 144 | 8 | 512 | 144 | 512 | 144 | 511 | 144 | | |
| 434.zeusmp | 8 | 310 | 234 | 310 | 235 | 307 | 237 | 8 | 310 | 234 | 310 | 235 | 307 | 237 | | |
| 435.gromacs | 8 | 201 | 284 | 213 | 268 | 214 | 267 | 8 | 206 | 277 | 205 | 278 | 203 | 281 | | |
| 436.cactusADM | 8 | 375 | 255 | 376 | 255 | 375 | 255 | 8 | 375 | 255 | 376 | 255 | 375 | 255 | | |
| 437.leslie3d | 8 | 784 | 95.9 | 783 | 96.0 | 786 | 95.7 | 8 | 784 | 95.9 | 783 | 96.0 | 786 | 95.7 | | |
| 444.namd | 8 | 370 | 174 | 371 | 173 | 367 | 175 | 8 | 365 | 176 | 367 | 175 | 371 | 173 | | |
| 447.dealII | 8 | 260 | 352 | 259 | 353 | 257 | 356 | 8 | 260 | 352 | 259 | 353 | 257 | 356 | | |
| 450.soplex | 8 | 635 | 105 | 635 | 105 | 635 | 105 | 4 | 280 | 119 | 280 | 119 | 281 | 119 | | |
| 453.povray | 8 | 144 | 295 | 145 | 294 | 144 | 296 | 8 | 125 | 341 | 125 | 340 | 124 | 342 | | |
| 454.calculix | 8 | 195 | 339 | 196 | 337 | 198 | 333 | 8 | 195 | 339 | 196 | 337 | 198 | 333 | | |
| 459.GemsFDTD | 8 | 1047 | 81.1 | 1047 | 81.1 | 1047 | 81.0 | 8 | 1047 | 81.1 | 1047 | 81.1 | 1047 | 81.0 | | |
| 465.tonto | 8 | 385 | 204 | 390 | 202 | 387 | 203 | 8 | 348 | 226 | 342 | 230 | 353 | 223 | | |
| 470.lbm | 8 | 581 | 189 | 581 | 189 | 581 | 189 | 8 | 581 | 189 | 581 | 189 | 581 | 189 | | |
| 481.wrf | 8 | 529 | 169 | 528 | 169 | 529 | 169 | 8 | 529 | 169 | 528 | 169 | 529 | 169 | | |
| 482.sphinx3 | 8 | 840 | 186 | 844 | 185 | 843 | 185 | 8 | 840 | 186 | 844 | 185 | 843 | 185 | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes

BIOS Configuration:

```

EIST Support set to Enabled
Intel (R) Hyper-Threading set to Enabled
C1E Support set to Enabled
C State Support set to Enabled
Turbo Mode set to Enable
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on TS450-SLE12 Fri Jan 15 22:05:29 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E3-1245 v5 @ 3.50GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
cache size : 8192 KB

```

From /proc/meminfo

```

MemTotal:      32932764 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

uname -a:

```

Linux TS450-SLE12 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Platform Notes (Continued)

run-level 3 Jan 15 14:10

SPEC is set to: /home/cpu2006-1.2-ic16.0

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda3 | xfs | 600G | 7.6G | 593G | 2% | /home |

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO FWKT32A 12/25/2015

Memory:

4x Samsung M378A1G43DB0-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Aug-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Jan-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Oct-2015

Tested by: Lenovo Group Limited

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Default-Platform-Flags.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer TS450
(3.50 GHz, Intel Xeon E3-1245 v5)

SPECfp_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Jan-2016

Hardware Availability: Oct-2015

Software Availability: Aug-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 9 17:21:47 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 February 2016.