



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = Not Run

KunLun 9016 (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 8050

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Mar-2015

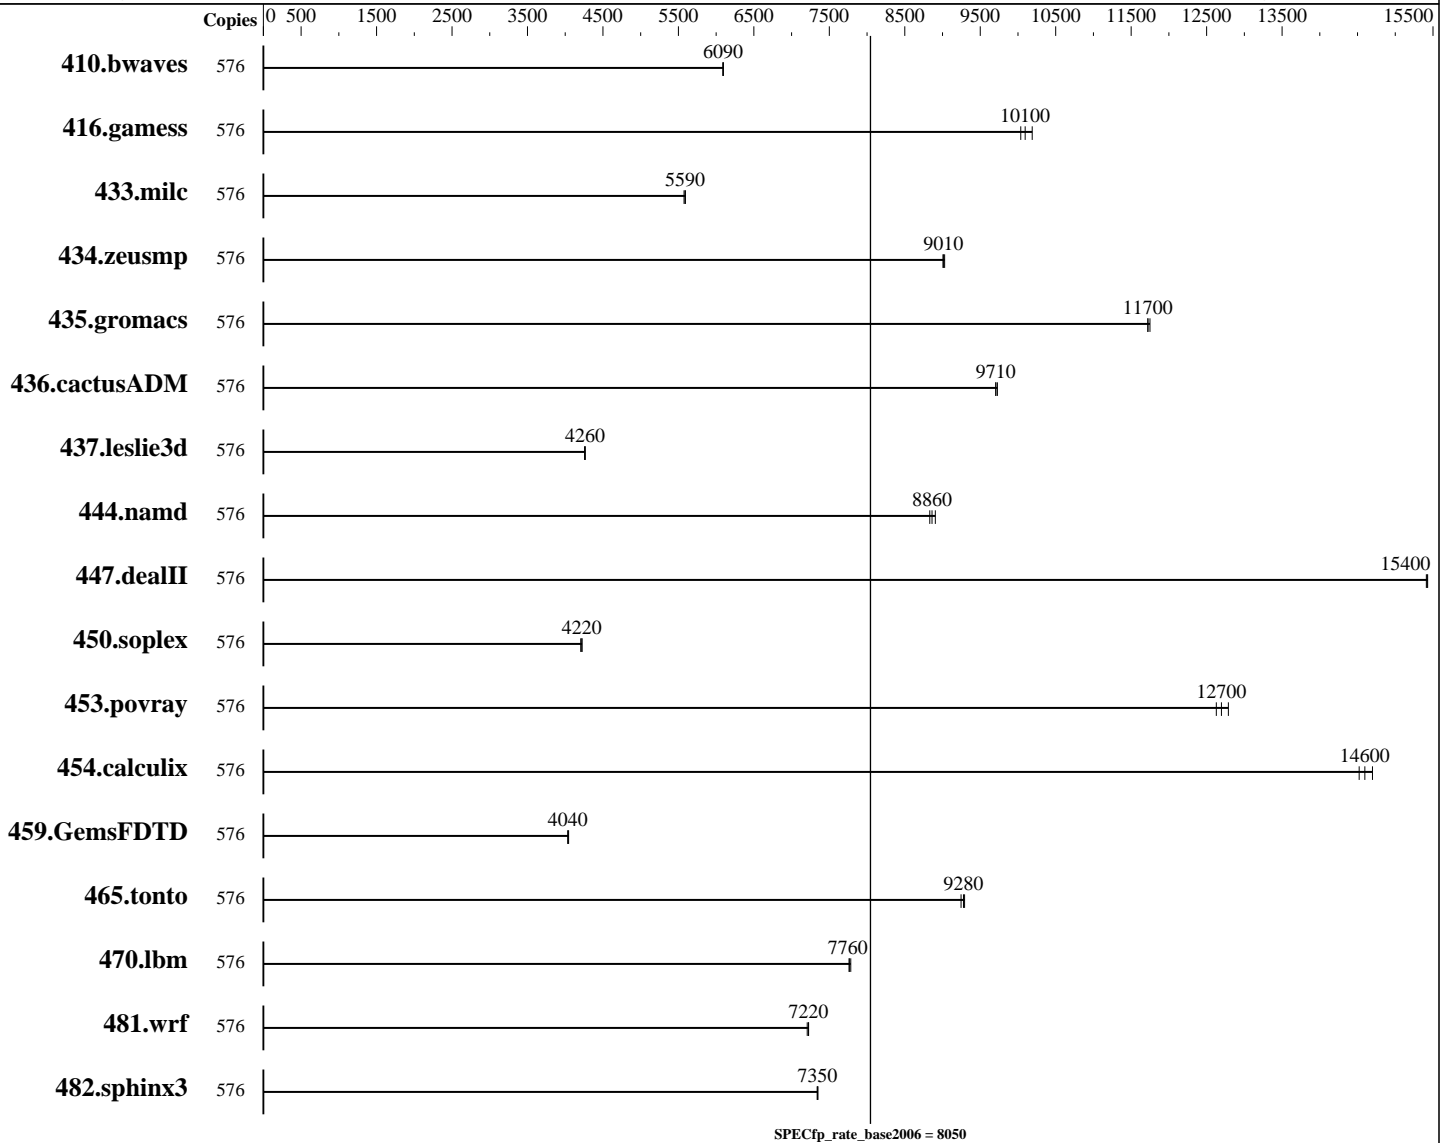

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 288 cores, 16 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8,16 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: tmpfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

KunLun 9016 (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 8050

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Mar-2015

L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 TB (256 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 3 x 300 GB SAS, 10K RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	576	1285	6090	1286	6090	1284	6100							
416.gamess	576	1107	10200	1124	10000	1117	10100							
433.milc	576	945	5590	948	5570	946	5590							
434.zeusmp	576	581	9010	581	9030	582	9010							
435.gromacs	576	351	11700	351	11700	350	11700							
436.cactusADM	576	708	9730	709	9710	709	9710							
437.leslie3d	576	1270	4260	1270	4260	1272	4260							
444.namd	576	519	8900	523	8830	521	8860							
447.dealII	576	427	15400	428	15400	427	15400							
450.soplex	576	1139	4220	1142	4210	1138	4220							
453.povray	576	240	12800	243	12600	241	12700							
454.calculix	576	323	14700	326	14600	327	14500							
459.GemsFDTD	576	1515	4030	1514	4040	1511	4040							
465.tonto	576	610	9290	613	9250	611	9280							
470.lbm	576	1017	7780	1019	7760	1019	7760							
481.wrf	576	893	7210	891	7220	890	7230							
482.sphinx3	576	1530	7340	1528	7350	1528	7350							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Tmpfs filesystem can be set with:
 mkdir -p /home/shm
 mount -t tmpfs -o size=1300g,rw tmpfs /home/shm
 Turbo mode set with:
 cpupower -c all frequency-set -g performance



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

KunLun 9016 (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 8050

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Mar-2015

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Set C-State to C0/C1

Sysinfo program /home/shm/speccpu-1.2-ic16/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on localhost.localdomain Thu Feb 4 09:43:43 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz

16 "physical id"s (chips)

576 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 8: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 9: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 10: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 11: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 12: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 13: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 14: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 15: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

cache size : 46080 KB

From /proc/meminfo

MemTotal: 4227106108 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.1 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.1"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

KunLun 9016 (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 8050

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Mar-2015

Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 10 02:29

SPEC is set to: /home/shm/speccpu-1.2-ic16
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    1.3T  3.8G  1.3T   1% /home/shm
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLXSV919 12/24/2015

(End of data from sysinfo program)
Because Huawei KunLun 9016 uses System Management BIOS (SMBIOS) v3.0, but the dmidecode of
RHEL7.1 is based on V2.0, so can not read the memory information.
```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/shm/speccpu-1.2-ic16/libs/32:/home/shm/speccpu-1.2-ic16/libs/64:/home/shm/speccpu-1.2-ic16/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

KunLun 9016 (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 8050

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Mar-2015

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = Not Run

KunLun 9016 (Intel Xeon E7-8890 v3)

SPECfp_rate_base2006 = 8050

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Mar-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Feb 23 17:36:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 February 2016.