



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175


Test date: Feb-2016

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Aug-2015

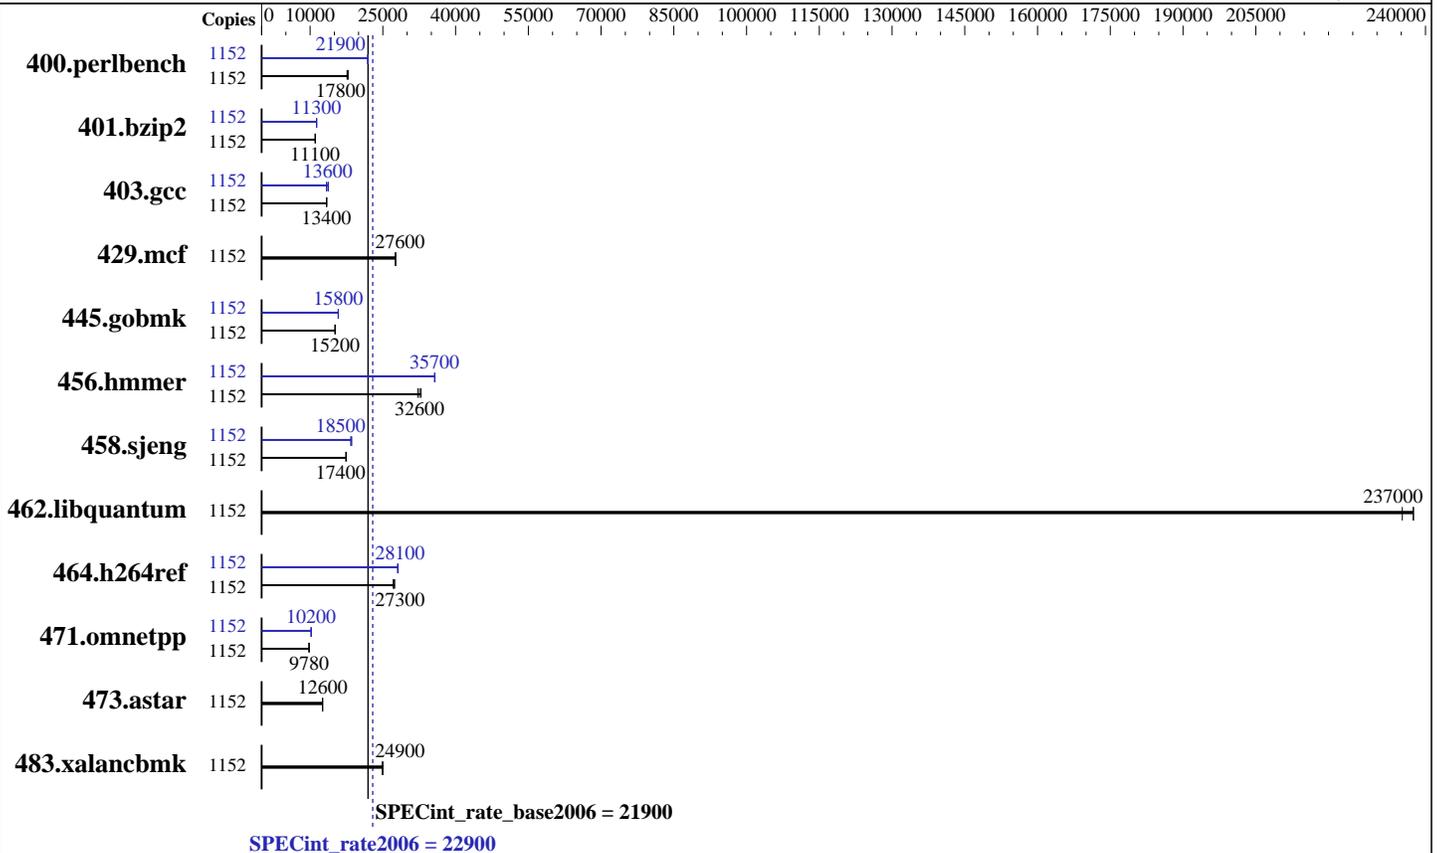

Hardware

CPU Name: Intel Xeon E7-8890 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 576 cores, 32 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8,16,24,32 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 TB (512 x 16 GB 2Rx4 PC4-2133P-R, running at 1600MHz)
 Disk Subsystem: 3 x 300GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)
 3.10.0-229.20.1.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2016
Hardware Availability: Jan-2016
Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	1152	<u>632</u>	<u>17800</u>	632	17800	639	17600	1152	<u>513</u>	<u>21900</u>	514	21900	513	21900
401.bzip2	1152	<u>1006</u>	<u>11100</u>	1006	11100	1004	11100	1152	978	11400	<u>980</u>	<u>11300</u>	981	11300
403.gcc	1152	694	13400	<u>692</u>	<u>13400</u>	689	13500	1152	<u>680</u>	<u>13600</u>	673	13800	694	13400
429.mcf	1152	<u>380</u>	<u>27600</u>	380	27600	381	27600	1152	<u>380</u>	<u>27600</u>	380	27600	381	27600
445.gobmk	1152	796	15200	798	15100	<u>797</u>	<u>15200</u>	1152	<u>764</u>	<u>15800</u>	766	15800	763	15800
456.hammer	1152	<u>330</u>	<u>32600</u>	334	32200	327	32900	1152	301	35700	<u>301</u>	<u>35700</u>	301	35700
458.sjeng	1152	799	17400	801	17400	<u>801</u>	<u>17400</u>	1152	759	18400	<u>752</u>	<u>18500</u>	751	18600
462.libquantum	1152	<u>101</u>	<u>237000</u>	100	238000	101	235000	1152	<u>101</u>	<u>237000</u>	100	238000	101	235000
464.h264ref	1152	940	27100	929	27400	<u>932</u>	<u>27300</u>	1152	909	28100	905	28200	<u>908</u>	<u>28100</u>
471.omnetpp	1152	<u>736</u>	<u>9780</u>	736	9780	735	9790	1152	705	10200	<u>705</u>	<u>10200</u>	704	10200
473.astar	1152	<u>643</u>	<u>12600</u>	644	12600	643	12600	1152	<u>643</u>	<u>12600</u>	644	12600	643	12600
483.xalancbmk	1152	320	24900	<u>319</u>	<u>24900</u>	318	25000	1152	320	24900	<u>319</u>	<u>24900</u>	318	25000

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mkdir -p /mnt/shm
mount -t tmpfs -o size=1300g,rw tmpfs /home/shm
Turbo mode set with:
cpupower -c all frequency-set -g performance

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Set C-State to C0/C1
Sysinfo program /home/shm/speccpu-1.2-ic16/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on 9016 Wed Feb 17 06:57:47 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Aug-2015

Platform Notes (Continued)

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz

32 "physical id"s (chips)

1152 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

```

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 8: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 9: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 10: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 11: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 12: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 13: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 14: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 15: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 16: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 17: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 18: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 19: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 20: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 21: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 22: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 23: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 24: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 25: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 26: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 27: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 28: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 29: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 30: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 31: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

```

cache size : 46080 KB

From /proc/meminfo

MemTotal: 8454947816 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Aug-2015

Platform Notes (Continued)

```

VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

uname -a:
Linux 9016 3.10.0-229.20.1.el7.x86_64 #1 SMP Thu Sep 24 12:23:56 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 16 08:45

SPEC is set to: /home/shm/speccpu-1.2-ic16
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    1.3T  8.8G  1.3T   1% /home/shm
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLXSV919 12/24/2015

(End of data from sysinfo program)
Because Huawei KunLun 9032 uses System Management BIOS (SMBIOS) v3.0, but the dmidecode of
RHEL7.1 is based on V2.0, so can not read the memory information.

```

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/shm/speccpu-1.2-ic16/libs/32:/home/shm/speccpu-1.2-ic16/libs/64:/home/shm/speccpu-1.2-ic16/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Aug-2015

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -D_FILE_OFFSET_BITS=64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -D_FILE_OFFSET_BITS=64
 458.sjeng: -D_FILE_OFFSET_BITS=64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Aug-2015

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
 401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
 403.gcc: `-D_FILE_OFFSET_BITS=64`
 429.mcf: `-D_FILE_OFFSET_BITS=64`
 445.gobmk: `-D_FILE_OFFSET_BITS=64`
 456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
 458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
 462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
 464.h264ref: `-D_FILE_OFFSET_BITS=64`
 471.omnetpp: `-D_FILE_OFFSET_BITS=64`
 473.astar: `-D_FILE_OFFSET_BITS=64`
 483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`
`-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`
`-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch`
`-auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias`
`-opt-mem-layout-trans=3`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Aug-2015

Peak Optimization Flags (Continued)

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-HSW-RevG.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = 22900

KunLun 9032 (Intel Xeon E7-8890 v3)

SPECint_rate_base2006 = 21900

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Feb-2016

Hardware Availability: Jan-2016

Software Availability: Aug-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Mar 8 12:33:06 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 March 2016.