



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = Not Run

SGI UV 3000 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_rate_base2006 = 42600

CPU2006 license: 4


Test date: Mar-2016

Test sponsor: SGI

Hardware Availability: Aug-2015

Tested by: SGI

Software Availability: May-2016

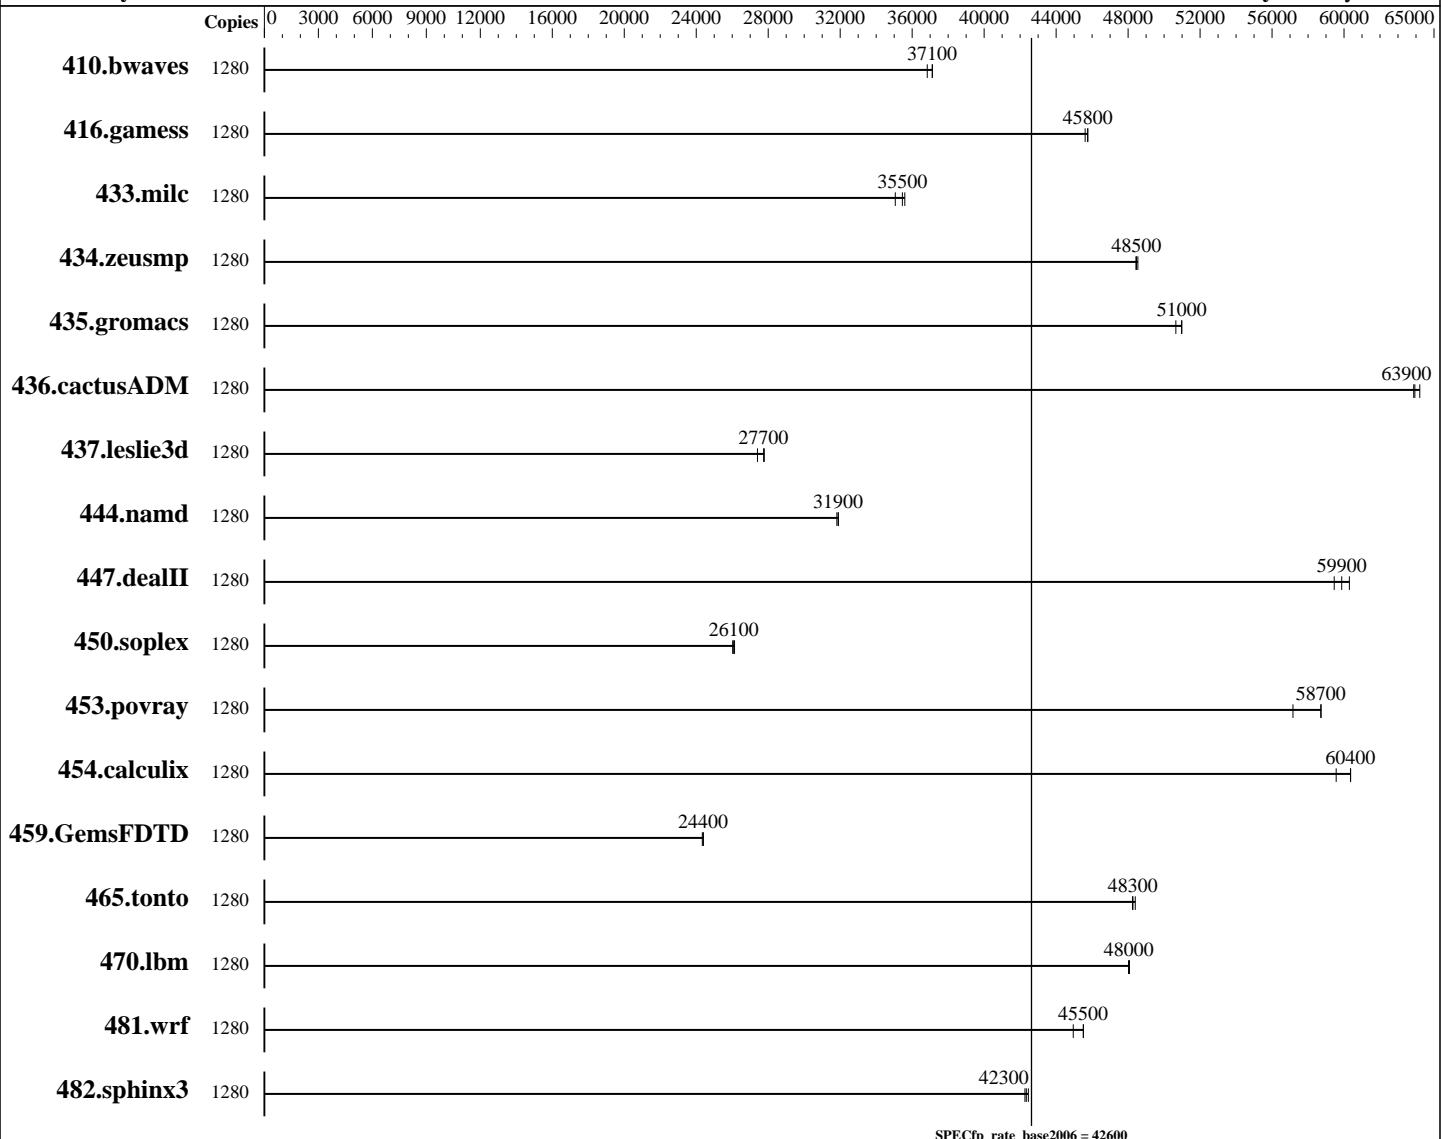

Hardware

CPU Name: Intel Xeon E5-4627 v3
CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz: 2600
FPU: Integrated
CPU(s) enabled: 1280 cores, 128 chips, 10 cores/chip
CPU(s) orderable: 4-256 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.53-60.30-default
Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: tmpfs
System State: Run level 3 (multi-user)
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = Not Run

SGI UV 3000 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_rate_base2006 = 42600

CPU2006 license: 4

Test date: Mar-2016

Test sponsor: SGI

Hardware Availability: Aug-2015

Tested by: SGI

Software Availability: May-2016

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 TB (1024 x 16 GB 2Rx4 PC4-2133P-R)
 Disk Subsystem: 16 TB tmpfs
 Other Hardware: NUMAlink6 routers

Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: SGI Foundation Software 2.14,
 Build 714a123.sles12sp1-1603011900
 SGI Accelerate 1.12,
 Build 714a123.sles12sp1-1603011900

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	1280	469	37100	472	36800	469	37100							
416.gamess	1280	548	45800	549	45600	548	45800							
433.milc	1280	331	35500	335	35100	330	35600							
434.zeusmp	1280	240	48400	240	48500	240	48500							
435.gromacs	1280	179	51000	180	50700	179	51000							
436.cactusADM	1280	238	64200	239	63900	239	63900							
437.leslie3d	1280	439	27400	434	27700	433	27800							
444.namd	1280	323	31800	322	31900	322	31900							
447.dealII	1280	243	60300	245	59900	246	59500							
450.soplex	1280	409	26100	409	26100	410	26000							
453.povray	1280	116	58700	119	57200	116	58700							
454.calculix	1280	175	60400	175	60400	177	59600							
459.GemsFDTD	1280	557	24400	557	24400	558	24300							
465.tonto	1280	261	48200	261	48300	260	48400							
470.lbm	1280	366	48000	366	48000	366	48100							
481.wrf	1280	314	45500	314	45500	318	45000							
482.sphinx3	1280	588	42500	589	42300	590	42300							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The dplace mechanism was used to bind copies to processors. The config file option 'submit' was used to generate dplace commands to bind each copy to a specific processor. Benchmark copies were launched in a staggered fashion to minimize kernel contention associated with synchronized launches. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

The tmpfs filesystem was set up with:

```
mkdir -p /mnt/shm/cpu2006-sgi-ic16
mount -t tmpfs -o size=16384g,rw tmpfs /mnt/shm/cpu2006-sgi-ic16
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = Not Run

SGI UV 3000 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_rate_base2006 = 42600

CPU2006 license: 4

Test date: Mar-2016

Test sponsor: SGI

Hardware Availability: Aug-2015

Tested by: SGI

Software Availability: May-2016

Platform Notes

The dmidecode output is in error - the memory was running at 2133.

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/mnt/shm/cpu2006-sgi-ic16/libs/32:/mnt/shm/cpu2006-sgi-ic16/libs/64:/mnt/shm/cpu2006-sgi-ic16/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

SGI

SPECfp_rate2006 = Not Run

SGI UV 3000 (Intel Xeon E5-4627 v3, 2.60 GHz)

SPECfp_rate_base2006 = 42600

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Mar-2016

Hardware Availability: Aug-2015

Software Availability: May-2016

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/SGI-UV3000-Platform-Flags.html>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/SGI-UV3000-Platform-Flags.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 22 16:14:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 March 2016.