



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint®_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017


Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

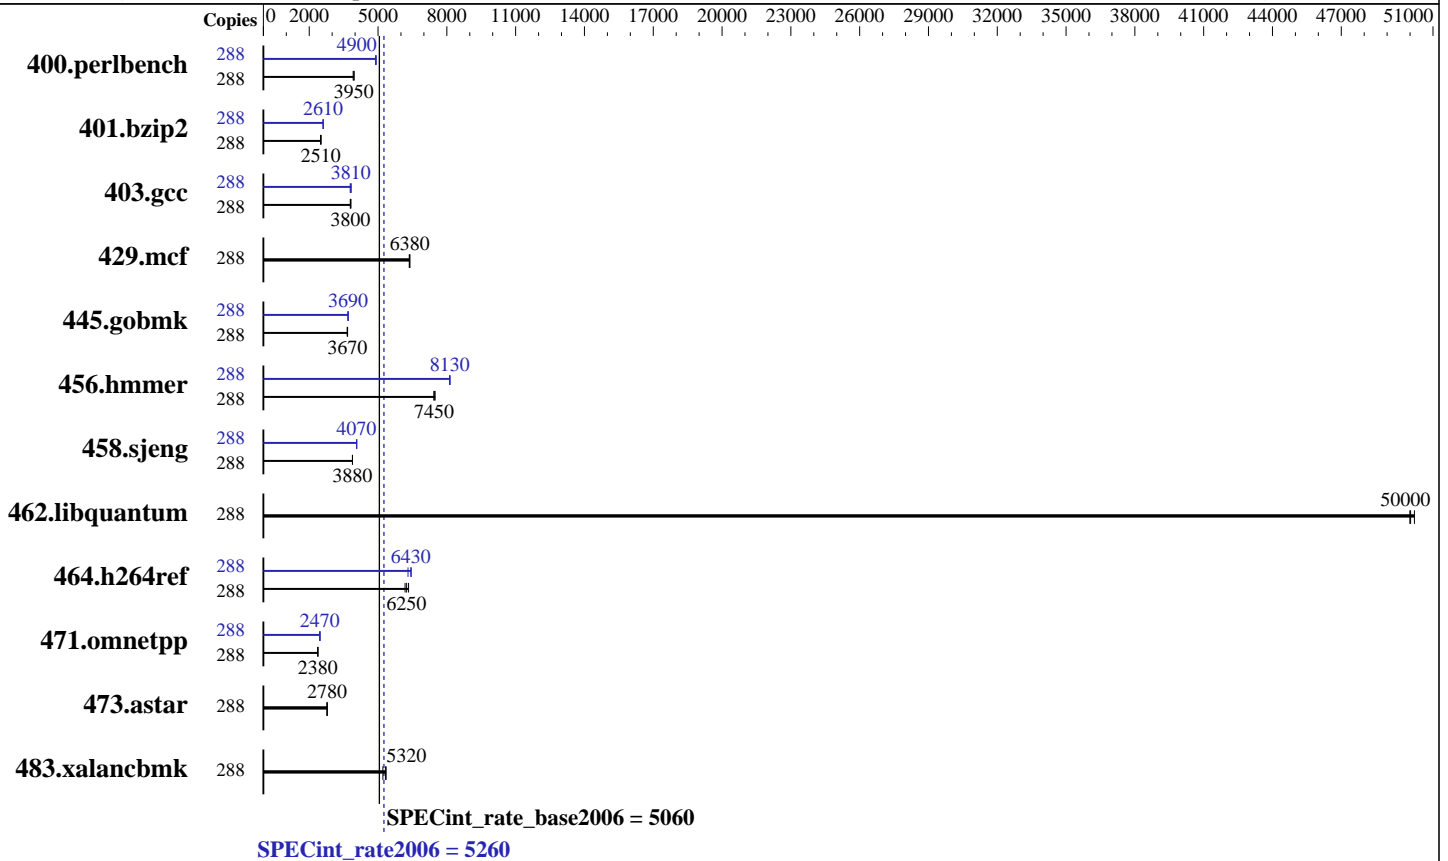

Hardware

CPU Name: Intel Xeon E7-8870 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 4, 6, 8 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 45 MB I+D on chip per chip
 Other Cache: None
 Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 400 GB SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) 3.12.28-4-default
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	288	712	3950	<u>712</u>	<u>3950</u>	719	3910	288	<u>574</u>	<u>4900</u>	574	4900	572	4920
401.bzip2	288	1113	2500	<u>1108</u>	<u>2510</u>	1107	2510	288	1066	2610	1066	2610	<u>1066</u>	<u>2610</u>
403.gcc	288	612	3790	<u>609</u>	<u>3800</u>	607	3820	288	612	3790	<u>609</u>	<u>3810</u>	605	3830
429.mcf	288	<u>412</u>	<u>6380</u>	413	6360	411	6390	288	<u>412</u>	<u>6380</u>	413	6360	411	6390
445.gobmk	288	823	3670	<u>824</u>	<u>3670</u>	827	3650	288	817	3700	819	3690	<u>818</u>	<u>3690</u>
456.hammer	288	361	7430	<u>361</u>	<u>7450</u>	359	7490	288	<u>331</u>	<u>8130</u>	330	8140	331	8120
458.sjeng	288	<u>897</u>	<u>3880</u>	897	3880	897	3890	288	<u>857</u>	<u>4070</u>	857	4070	856	4070
462.libquantum	288	<u>119</u>	<u>50000</u>	119	50000	119	50200	288	<u>119</u>	<u>50000</u>	119	50000	119	50200
464.h264ref	288	1032	6180	<u>1020</u>	<u>6250</u>	1007	6330	288	989	6450	1011	6310	<u>992</u>	<u>6430</u>
471.omnetpp	288	<u>758</u>	<u>2380</u>	758	2370	757	2380	288	734	2450	<u>729</u>	<u>2470</u>	728	2470
473.astar	288	728	2780	727	2780	<u>728</u>	<u>2780</u>	288	728	2780	727	2780	<u>728</u>	<u>2780</u>
483.xalancbmk	288	371	5350	<u>373</u>	<u>5320</u>	381	5210	288	371	5350	<u>373</u>	<u>5320</u>	381	5210

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Custom in BIOS
Cstates disabled in BIOS
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-lea3 Fri Oct 23 02:08:29 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8870 v3 @ 2.10GHz
8 "physical id"s (chips)
288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

```

cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB

```

From /proc/meminfo

```

MemTotal:      2117726352 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*

SuSE-release:

```

SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0

```

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

```

NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

```

uname -a:

```

Linux linux-lea3 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 23 02:07 last=5

SPEC is set to: /cpu2006.1.2

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        xfs       371G      8.1G 363G   3% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Platform Notes (Continued)

BIOS IBM -[A9E125JUS-2.00]- 06/18/2015

Memory:

126x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz
2x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz
64x NO DIMM Unknown

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-CC.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint_rate2006 = 5260

Lenovo System x3950 X6
(Intel Xeon E7-8870 v3, 2.10 GHz)

SPECint_rate_base2006 = 5060

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jul-2015

Tested by: Lenovo Group Limited

Software Availability: Oct-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 12:55:45 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 April 2016.