



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECfp®\_rate2006 = 827**

Express5800/R120g-2E (Intel Xeon E5-2650 v4)

**SPECfp\_rate\_base2006 = 808**

**CPU2006 license:** 9006


**Test date:** Feb-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

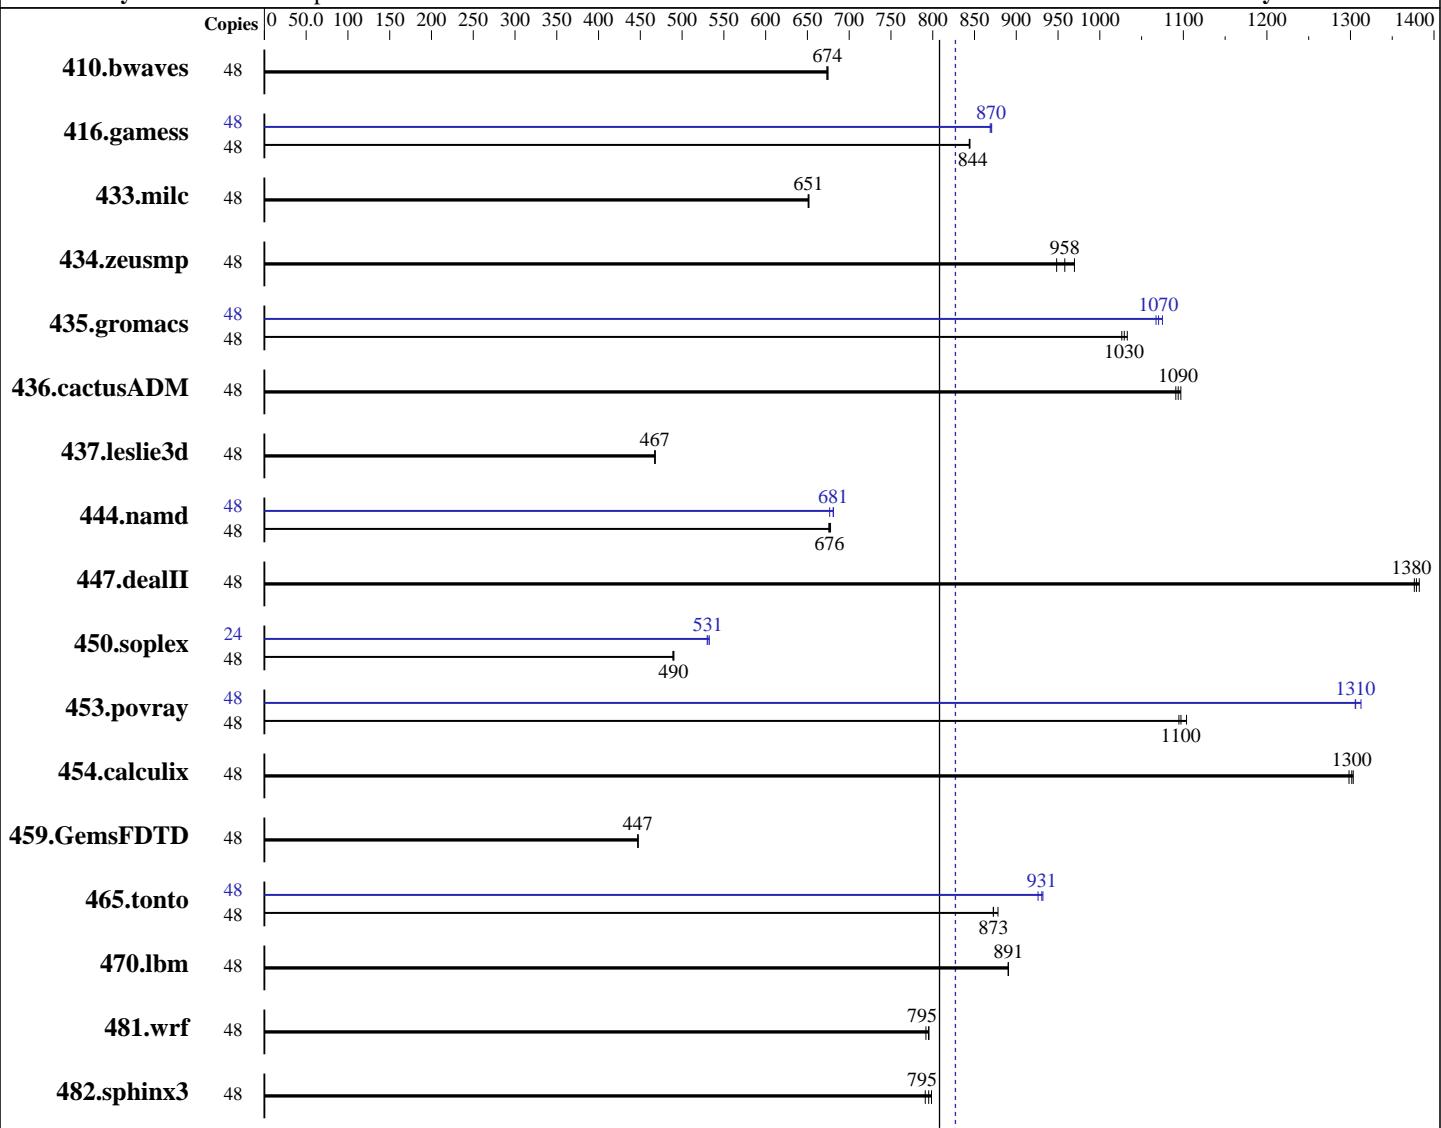

**SPECfp\_rate\_base2006 = 808**

**SPECfp\_rate2006 = 827**

## Hardware

CPU Name: Intel Xeon E5-2650 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: Kernel 3.10.0-327.4.5.el7.x86\_64  
 C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2650 v4)

**SPECfp\_rate2006 = 827**

**SPECfp\_rate\_base2006 = 808**

**CPU2006 license:** 9006

**Test date:** Feb-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	967	675	969	673	<b>968</b>	<b>674</b>	48	967	675	969	673	<b>968</b>	<b>674</b>
416.gamess	48	1113	845	<u>1114</u>	<u>844</u>	1114	844	48	1080	871	<u>1081</u>	<u>870</u>	1082	869
433.milc	48	677	651	676	652	<b>677</b>	<b>651</b>	48	677	651	676	652	<b>677</b>	<b>651</b>
434.zeusmp	48	<u>456</u>	<u>958</u>	461	948	450	970	48	<u>456</u>	<u>958</u>	461	948	450	970
435.gromacs	48	332	1030	334	1030	<u>333</u>	<u>1030</u>	48	<u>320</u>	<u>1070</u>	321	1070	319	1070
436.cactusADM	48	<u>524</u>	<u>1090</u>	523	1100	526	1090	48	<u>524</u>	<u>1090</u>	523	1100	526	1090
437.leslie3d	48	964	468	<u>965</u>	<u>467</u>	966	467	48	964	468	<u>965</u>	<u>467</u>	966	467
444.namd	48	568	678	570	676	<u>569</u>	<u>676</u>	48	565	681	569	677	<u>565</u>	<u>681</u>
447.dealII	48	399	1380	397	1380	<u>398</u>	<u>1380</u>	48	399	1380	397	1380	<u>398</u>	<u>1380</u>
450.soplex	48	819	489	<u>818</u>	<u>490</u>	817	490	24	378	530	376	533	<u>377</u>	<u>531</u>
453.povray	48	231	1100	233	1090	<u>233</u>	<u>1100</u>	48	195	1310	196	1310	<u>195</u>	<u>1310</u>
454.calculix	48	305	1300	<u>304</u>	<u>1300</u>	304	1300	48	305	1300	<u>304</u>	<u>1300</u>	304	1300
459.GemsFDTD	48	1139	447	<u>1139</u>	<u>447</u>	1138	447	48	1139	447	<u>1139</u>	<u>447</u>	1138	447
465.tonto	48	538	878	541	872	<u>541</u>	<u>873</u>	48	507	932	<u>508</u>	<u>931</u>	510	926
470.lbm	48	741	890	<u>741</u>	<u>891</u>	740	891	48	741	890	<u>741</u>	<u>891</u>	740	891
481.wrf	48	674	796	<u>674</u>	<u>795</u>	677	792	48	674	796	<u>674</u>	<u>795</u>	677	792
482.sphinx3	48	1172	799	<u>1177</u>	<u>795</u>	1183	791	48	1172	799	<u>1177</u>	<u>795</u>	1183	791

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom  
 Energy Performance: Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2650 v4)

**SPECfp\_rate2006 = 827**

**SPECfp\_rate\_base2006 = 808**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Feb-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Platform Notes (Continued)

Patrol Scrub: Disabled

Cluster on Die: Enabled

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2650 v4)

**SPECfp\_rate2006 = 827**

**SPECfp\_rate\_base2006 = 808**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Feb-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Base Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2650 v4)

**SPECfp\_rate2006 = 827**

**SPECfp\_rate\_base2006 = 808**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Feb-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Peak Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
            -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-2E (Intel Xeon E5-2650 v4)

**SPECfp\_rate2006 = 827**

**SPECfp\_rate\_base2006 = 808**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Feb-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Jan-2016

## Peak Optimization Flags (Continued)

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 13:12:19 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 April 2016.