SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECint®_rate2006 = 919

SPECint_rate_base2006 = 877

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

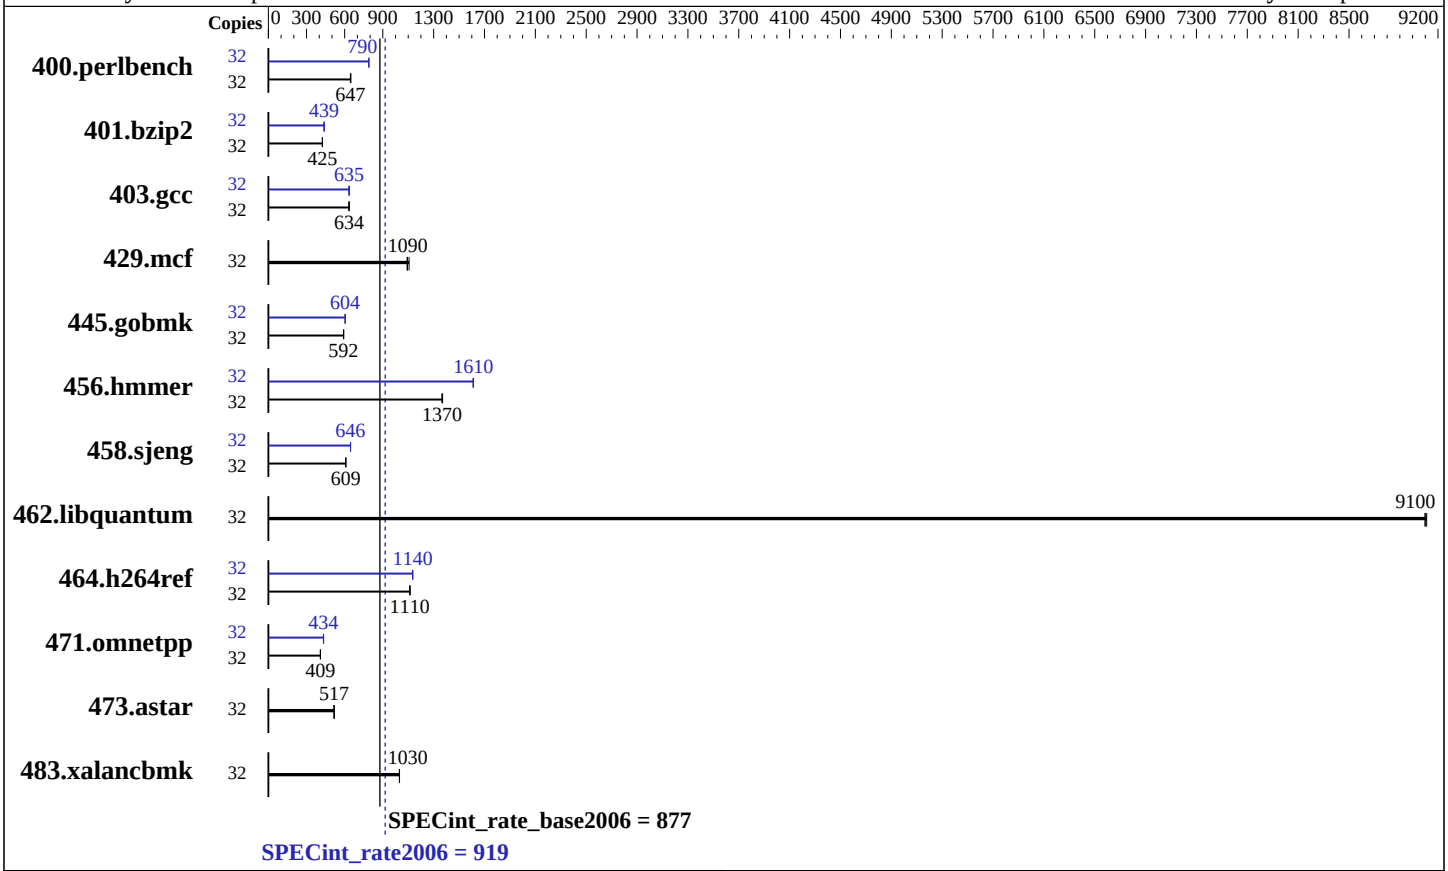

Hardware

CPU Name:	Intel Xeon E5-2667 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 400 GB SATA III SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1, Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6018TR-T
(X10DRT-L , Intel Xeon E5-2667 v4)

SPECint_rate2006 = 919

SPECint_rate_base2006 = 877

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2016
Hardware Availability: Mar-2016
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	482	649	**483**	**647**	485	645	32	**396**	**790**	396	789	395	791
401.bzip2	32	726	425	727	425	**727**	**425**	32	705	438	**704**	**439**	703	439
403.gcc	32	**406**	**634**	405	636	407	634	32	404	637	407	633	**405**	**635**
429.mcf	32	**267**	**1090**	264	1110	267	1090	32	**267**	**1090**	264	1110	267	1090
445.gobmk	32	**567**	**592**	568	591	566	593	32	**556**	**604**	555	605	557	603
456.hmmer	32	218	1370	219	1370	**218**	**1370**	32	185	1610	**185**	**1610**	185	1610
458.sjeng	32	635	609	636	609	**636**	**609**	32	**599**	**646**	599	647	599	646
462.libquantum	32	72.8	9110	**72.8**	**9100**	72.9	9100	32	72.8	9110	**72.8**	**9100**	72.9	9100
464.h264ref	32	635	1120	638	1110	**637**	**1110**	32	**624**	**1140**	624	1140	624	1130
471.omnetpp	32	**489**	**409**	489	409	489	409	32	460	435	**461**	**434**	462	433
473.astar	32	**434**	**517**	435	517	434	518	32	**434**	**517**	435	517	434	518
483.xalancbmk	32	**214**	**1030**	214	1030	214	1030	32	**214**	**1030**	214	1030	214	1030

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Early Snoop = Disable
Sysinfo program /home/cpu2006_ic16/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-hp47 Tue May  3 17:44:52 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2667 v4 @ 3.20GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 8
        siblings  : 16
        physical 0: cores 0 2 3 4 8 10 11 12
        physical 1: cores 0 2 3 4 8 10 11 12
     cache size : 25600 KB

  From /proc/meminfo
     MemTotal:       264379864 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux linux-hp47 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 May 3 17:33

  SPEC is set to: /home/cpu2006_ic16
     Filesystem     Type   Size  Used Avail Use% Mounted on
     /dev/sda1      btrfs  373G  8.7G  364G   3% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. 2.0 12/17/2015
    Memory:
     8x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006_ic16/libs/32:/home/cpu2006_ic16/libs/64:/home/cpu2006_ic16/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
  401.bzip2: -D_FILE_OFFSET_BITS=64
    403.gcc: -D_FILE_OFFSET_BITS=64
    429.mcf: -D_FILE_OFFSET_BITS=64
  445.gobmk: -D_FILE_OFFSET_BITS=64
  456.hmmer: -D_FILE_OFFSET_BITS=64
  458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
  464.h264ref: -D_FILE_OFFSET_BITS=64
  471.omnetpp: -D_FILE_OFFSET_BITS=64
    473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jun 1 19:10:38 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2016.