



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp®\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

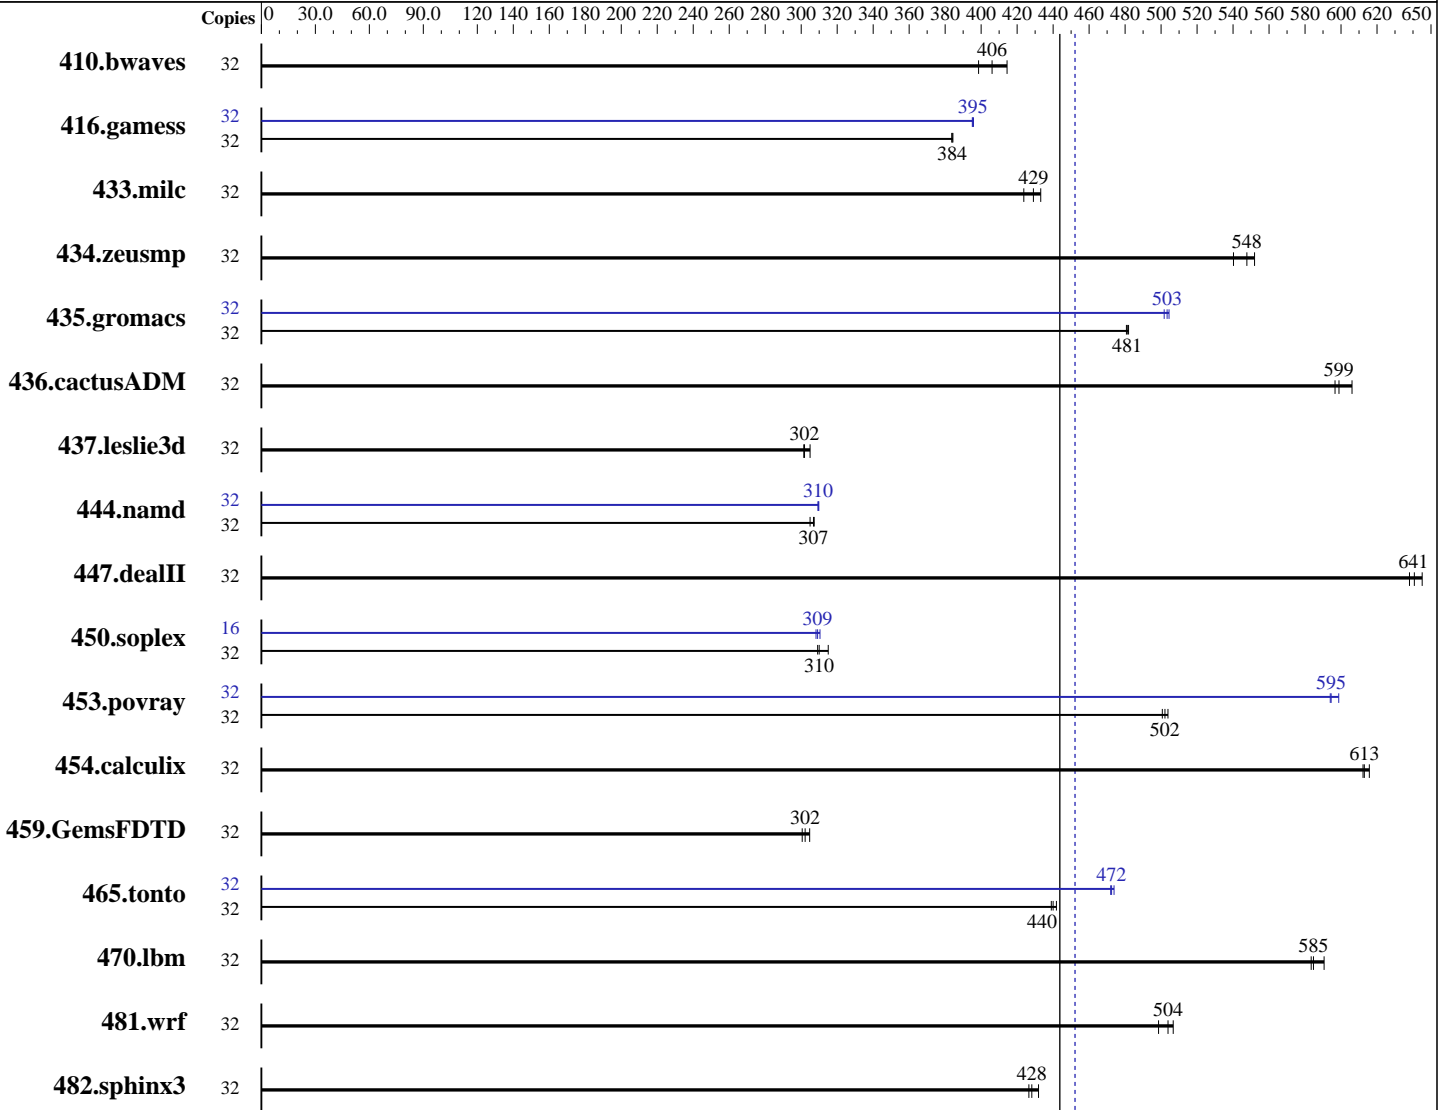

SPECfp\_rate\_base2006 = 444

SPECfp\_rate2006 = 452

### Hardware

CPU Name: Intel Xeon E5-2608L v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 1.70 GHz  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2, Kernel 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)  
Disk Subsystem: 1 x 1000 GB SATA III, 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1049	414	<b>1071</b>	<b>406</b>	1091	399	32	1049	414	<b>1071</b>	<b>406</b>	1091	399
416.gamess	32	<b>1632</b>	<b>384</b>	1630	384	1633	384	32	1586	395	<b>1585</b>	<b>395</b>	1583	396
433.milc	32	678	433	<b>685</b>	<b>429</b>	693	424	32	678	433	<b>685</b>	<b>429</b>	693	424
434.zeusmp	32	<b>532</b>	<b>548</b>	528	552	539	540	32	<b>532</b>	<b>548</b>	528	552	539	540
435.gromacs	32	474	482	475	481	<b>475</b>	<b>481</b>	32	<b>454</b>	<b>503</b>	453	504	455	502
436.cactusADM	32	631	606	<b>639</b>	<b>599</b>	641	597	32	631	606	<b>639</b>	<b>599</b>	641	597
437.leslie3d	32	986	305	<b>997</b>	<b>302</b>	998	301	32	986	305	<b>997</b>	<b>302</b>	998	301
444.namd	32	835	307	<b>836</b>	<b>307</b>	842	305	32	828	310	830	309	<b>829</b>	<b>310</b>
447.dealII	32	<b>571</b>	<b>641</b>	574	638	567	645	32	<b>571</b>	<b>641</b>	574	638	567	645
450.soplex	32	847	315	<b>861</b>	<b>310</b>	863	309	16	<b>432</b>	<b>309</b>	430	310	433	308
453.povray	32	338	504	<b>339</b>	<b>502</b>	340	501	32	284	599	<b>286</b>	<b>595</b>	287	594
454.calculix	32	429	616	431	612	<b>431</b>	<b>613</b>	32	429	616	431	612	<b>431</b>	<b>613</b>
459.GemsFDTD	32	1114	305	1130	301	<b>1124</b>	<b>302</b>	32	1114	305	1130	301	<b>1124</b>	<b>302</b>
465.tonto	32	713	442	717	439	<b>716</b>	<b>440</b>	32	664	474	<b>666</b>	<b>472</b>	667	472
470.lbm	32	744	591	754	583	<b>752</b>	<b>585</b>	32	744	591	754	583	<b>752</b>	<b>585</b>
481.wrf	32	705	507	<b>709</b>	<b>504</b>	717	499	32	705	507	<b>709</b>	<b>504</b>	717	499
482.sphinx3	32	1444	432	<b>1457</b>	<b>428</b>	1462	427	32	1444	432	<b>1457</b>	<b>428</b>	1462	427

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Early Snoop = Disable  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Apr-2016  
**Hardware Availability:** Mar-2016  
**Software Availability:** Sep-2015

### Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Wed Apr 13 04:17:17 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2608L v4 @ 1.60GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      528084776 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Apr 12 16:46

```
SPEC is set to: /home/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs      389G   31G  358G   8% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

### Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0a 03/17/2016

Memory:

16x Micron 36ASF4G72PZ-2G3A1 32 GB 2 rank 2400 MHz, configured at 1866 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

## Base Portability Flags (Continued)

444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Apr-2016  
Hardware Availability: Mar-2016  
Software Availability: Sep-2015

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2016

Hardware Availability: Mar-2016

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 6038R-TXR  
(X10DRX , Intel Xeon E5-2608L v4)

SPECfp\_rate2006 = 452

SPECfp\_rate\_base2006 = 444

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Apr-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jun 1 19:10:37 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 June 2016.