



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(3.20 GHz, Intel Xeon E5-2667 v4)

SPECfp®\_rate2006 = 740

SPECfp\_rate\_base2006 = 721

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

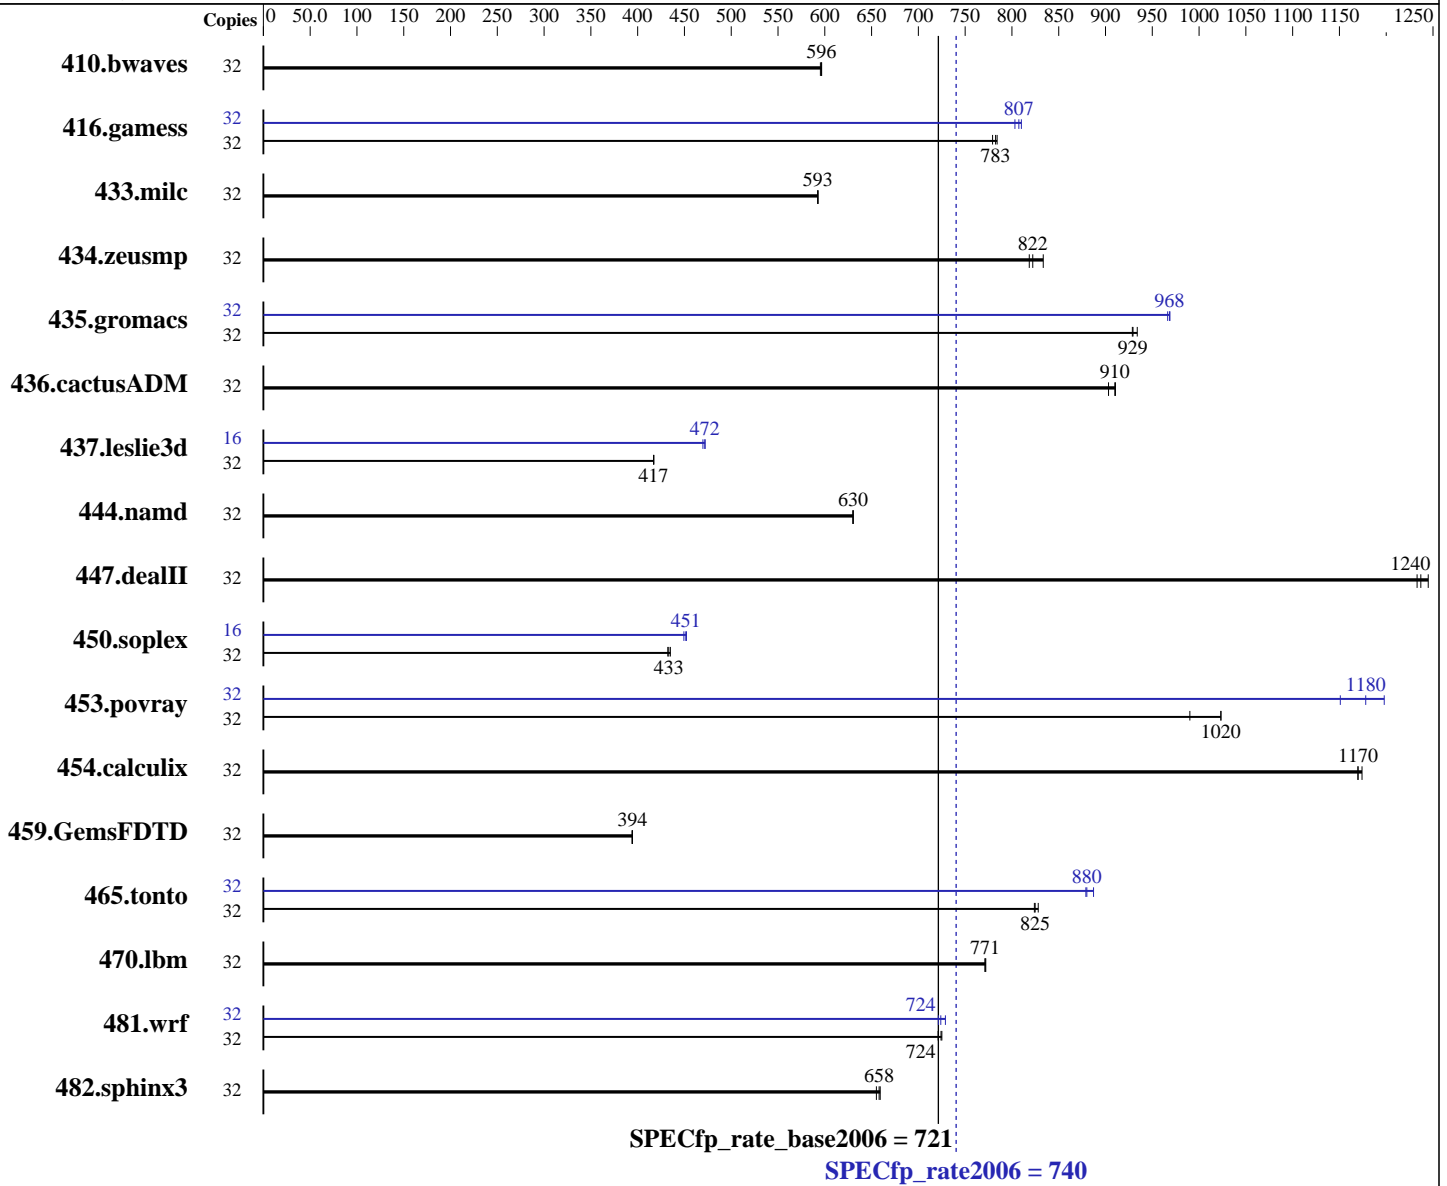

## Hardware

CPU Name: Intel Xeon E5-2667 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3200  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2, (Maipo)  
 Kernel 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(3.20 GHz, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 740

SPECfp\_rate\_base2006 = 721

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	731	595	729	597	<b>729</b>	<b>596</b>	32	731	595	729	597	<b>729</b>	<b>596</b>
416.gamess	32	<b>801</b>	<b>783</b>	799	784	804	779	32	780	803	<b>776</b>	<b>807</b>	773	810
433.milc	32	496	592	<b>496</b>	<b>593</b>	496	593	32	496	592	<b>496</b>	<b>593</b>	496	593
434.zeusmp	32	356	819	<b>354</b>	<b>822</b>	349	833	32	356	819	<b>354</b>	<b>822</b>	349	833
435.gromacs	32	245	934	246	929	<b>246</b>	<b>929</b>	32	236	969	<b>236</b>	<b>968</b>	236	966
436.cactusADM	32	423	903	<b>420</b>	<b>910</b>	420	911	32	423	903	<b>420</b>	<b>910</b>	420	911
437.leslie3d	32	721	417	<b>721</b>	<b>417</b>	721	417	16	320	470	<b>319</b>	<b>472</b>	319	472
444.namd	32	407	630	407	630	<b>407</b>	<b>630</b>	32	407	630	407	630	<b>407</b>	<b>630</b>
447.dealII	32	294	1240	<b>296</b>	<b>1240</b>	297	1230	32	294	1240	<b>296</b>	<b>1240</b>	297	1230
450.soplex	32	614	435	617	432	<b>616</b>	<b>433</b>	16	297	449	<b>296</b>	<b>451</b>	295	452
453.povray	32	<b>166</b>	<b>1020</b>	166	1020	172	990	32	<b>145</b>	<b>1180</b>	148	1150	142	1200
454.calculix	32	226	1170	<b>226</b>	<b>1170</b>	225	1170	32	226	1170	<b>226</b>	<b>1170</b>	225	1170
459.GemsFDTD	32	861	394	862	394	<b>861</b>	<b>394</b>	32	861	394	862	394	<b>861</b>	<b>394</b>
465.tonto	32	<b>382</b>	<b>825</b>	380	828	382	824	32	<b>358</b>	<b>880</b>	355	887	358	879
470.lbm	32	570	771	569	772	<b>570</b>	<b>771</b>	32	570	771	569	772	<b>570</b>	<b>771</b>
481.wrf	32	496	721	493	725	<b>494</b>	<b>724</b>	32	490	729	495	721	<b>494</b>	<b>724</b>
482.sphinx3	32	952	655	946	659	<b>948</b>	<b>658</b>	32	952	655	946	659	<b>948</b>	<b>658</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(3.20 GHz, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 740

SPECfp\_rate\_base2006 = 721

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Platform Notes (Continued)

Minimum Processor Idle Power Core C-State set to C1E State  
Minimum Processor Idle Power Package C-State set to No Package State  
QPI Snoop Configuration set to Home Snoop  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/new\_fp/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on DL380Gen9allbin Sun May 8 22:20:53 2016

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2667 v4 @ 3.20GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 2 3 4 8 10 11 12
  physical 1: cores 0 2 3 4 8 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      528066700 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux DL380Gen9allbin 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT
2015 x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(3.20 GHz, Intel Xeon E5-2667 v4)

**SPECfp\_rate2006 = 740**

**SPECfp\_rate\_base2006 = 721**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

## Platform Notes (Continued)

run-level 3 May 8 05:26

SPEC is set to: /home/new\_fp/cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda5	xfs	318G	134G	185G	42%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P89 03/23/2016

Memory:

8x UNKNOWN NOT AVAILABLE

16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as: 16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/new\_fp/cpu2006/libs/32:/home/new\_fp/cpu2006/libs/64:/home/new\_fp/cpu2006/sh"

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(3.20 GHz, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 740

SPECfp\_rate\_base2006 = 721

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-fp-model fast=2 -auto-ilp32 -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch
-qopt-prefetch-issue-excl-hint

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

```

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/lib/ia32\_lin

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(3.20 GHz, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 740

SPECfp\_rate\_base2006 = 721

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -static(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(3.20 GHz, Intel Xeon E5-2667 v4)

SPECfp\_rate2006 = 740

SPECfp\_rate\_base2006 = 721

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

## Peak Optimization Flags (Continued)

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(3.20 GHz, Intel Xeon E5-2667 v4)

**SPECfp\_rate2006 = 740**

**SPECfp\_rate\_base2006 = 721**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** May-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Nov-2015

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-BDW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jun 30 14:06:55 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 June 2016.