



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp<sup>®</sup>\_rate2006 = 427

SPECfp\_rate\_base2006 = 439

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

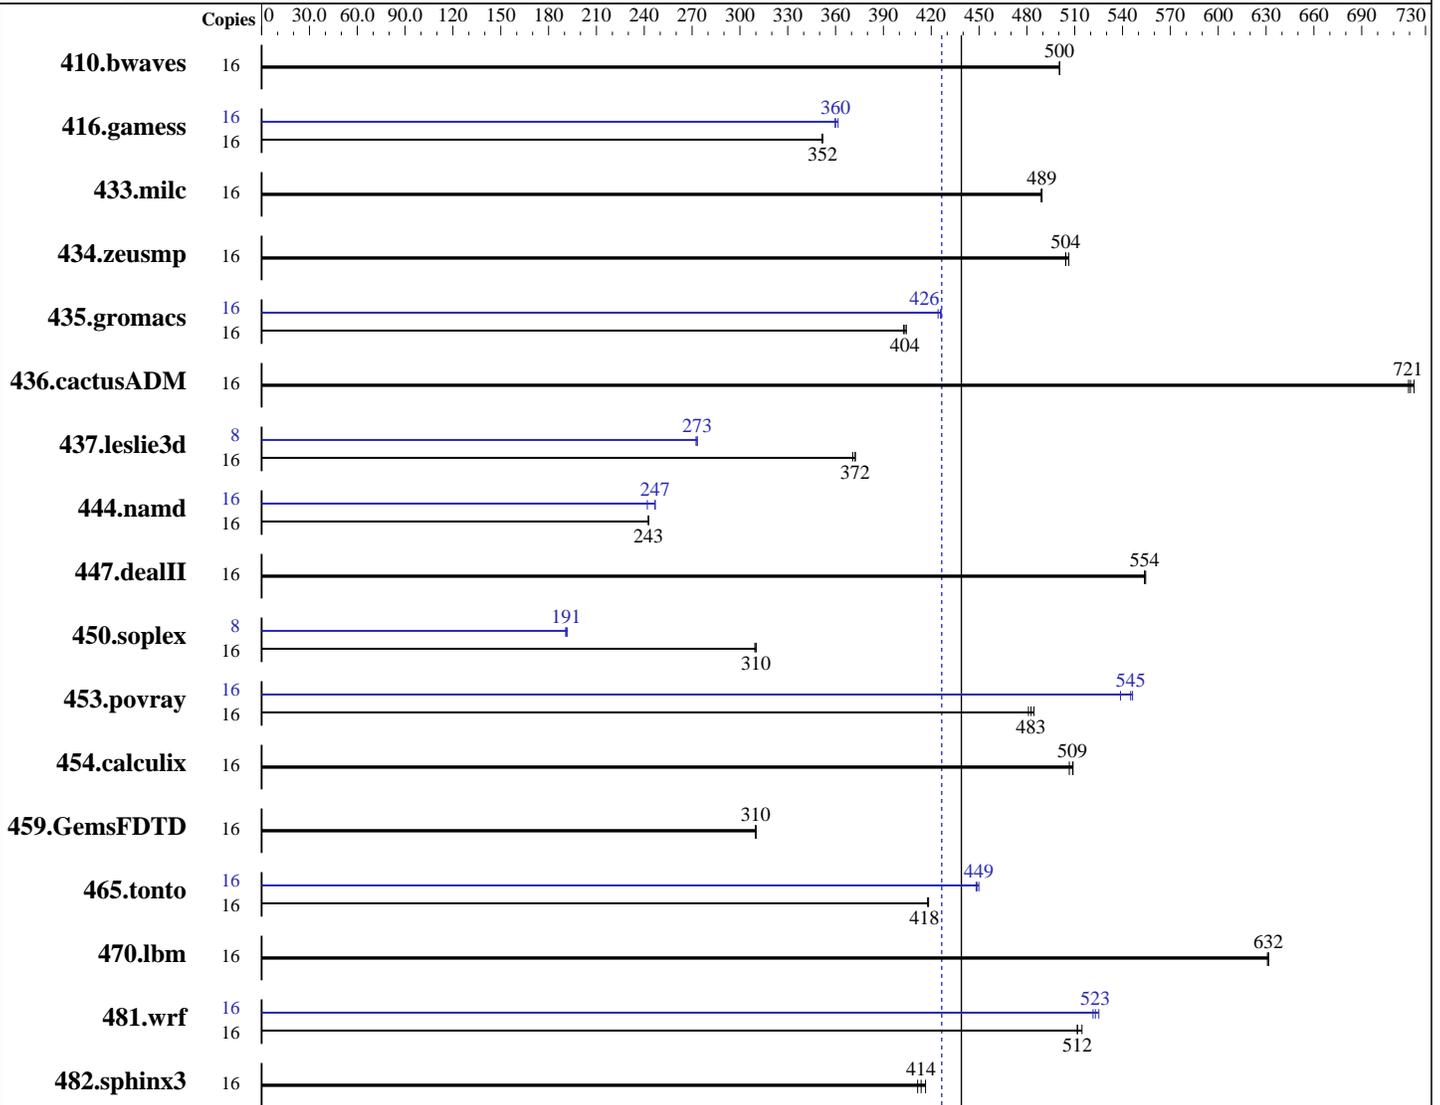

SPECfp\_rate\_base2006 = 439

SPECfp\_rate2006 = 427

### Hardware

CPU Name: Intel Xeon E5-2609 v4  
 CPU Characteristics:  
 CPU MHz: 1700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate2006 = 427

SPECfp\_rate\_base2006 = 439

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 1866 MHz)  
Disk Subsystem: 1 x 800 GB SAS SSD, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>434</b>	<b>500</b>	435	500	434	501	16	<b>434</b>	<b>500</b>	435	500	434	501
416.gamess	16	890	352	891	351	<b>890</b>	<b>352</b>	16	871	360	<b>870</b>	<b>360</b>	867	362
433.milc	16	300	489	300	489	<b>300</b>	<b>489</b>	16	300	489	300	489	<b>300</b>	<b>489</b>
434.zeusmp	16	<b>289</b>	<b>504</b>	289	504	288	506	16	<b>289</b>	<b>504</b>	289	504	288	506
435.gromacs	16	<b>283</b>	<b>404</b>	282	404	284	403	16	269	424	<b>268</b>	<b>426</b>	268	426
436.cactusADM	16	265	723	266	719	<b>265</b>	<b>721</b>	16	265	723	266	719	<b>265</b>	<b>721</b>
437.leslie3d	16	404	372	406	371	<b>404</b>	<b>372</b>	8	276	272	<b>275</b>	<b>273</b>	275	273
444.namd	16	529	243	529	243	<b>529</b>	<b>243</b>	16	530	242	<b>520</b>	<b>247</b>	520	247
447.dealII	16	330	555	<b>330</b>	<b>554</b>	331	554	16	330	555	<b>330</b>	<b>554</b>	331	554
450.soplex	16	<b>430</b>	<b>310</b>	430	310	431	309	8	350	191	348	192	<b>349</b>	<b>191</b>
453.povray	16	<b>176</b>	<b>483</b>	177	481	176	484	16	<b>156</b>	<b>545</b>	156	546	158	539
454.calculix	16	261	507	259	509	<b>260</b>	<b>509</b>	16	261	507	259	509	<b>260</b>	<b>509</b>
459.GemsFDTD	16	548	310	<b>548</b>	<b>310</b>	547	310	16	548	310	<b>548</b>	<b>310</b>	547	310
465.tonto	16	376	418	377	418	<b>377</b>	<b>418</b>	16	350	450	351	448	<b>351</b>	<b>449</b>
470.lbm	16	348	631	348	632	<b>348</b>	<b>632</b>	16	348	631	348	632	<b>348</b>	<b>632</b>
481.wrf	16	347	515	349	512	<b>349</b>	<b>512</b>	16	<b>342</b>	<b>523</b>	343	521	340	525
482.sphinx3	16	758	411	<b>754</b>	<b>414</b>	749	416	16	758	411	<b>754</b>	<b>414</b>	749	416

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**  
(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate2006 = 427**

**SPECfp\_rate\_base2006 = 439**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Platform Notes

### BIOS Configuration:

```

Power Profile set to Custom
Power Regulator set to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C1E State
Minimum Processor Idle Power Package C-State set to No Package State
Collaborative Power Control set to Disabled
QPI Snoop Configuration set to Home Snoop
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Double Refresh Rate set to 1x Refresh
Energy Performance Bias set to Maximum Performance

```

### Sysinfo program

```

/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-7m51 Sun Jun 5 23:06:20 2016

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E5-2609 v4 @ 1.70GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

### From /proc/meminfo

```

MemTotal:      529095464 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

### /usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP1
```

### From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
 SUSE Linux Enterprise Server 12 (x86_64)
 VERSION = 12
 PATCHLEVEL = 1
 # This file is deprecated and will be removed in a future service pack or
 release.
 # Please check /etc/os-release for details about this release.
os-release:
 NAME="SLES"
 VERSION="12-SP1"

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**

(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate2006 = 427**

**SPECfp\_rate\_base2006 = 439**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-7m51 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 5 23:06
```

SPEC is set to: /home/specuser/cpu2006/HP\_compiled\_binaries\_latest/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   703G  236G  468G  34% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P92 04/12/2016

Memory:

8x UNKNOWN NOT AVAILABLE

16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz, configured at 1866 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as: 16x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz, configured at 1866 MHz

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = /home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/libs/32:/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/libs/64:/home/specuser/cpu2006/HP_compiled_binaries_latest/cpu2006/sh*
```

Binaries compiled on a system with 1x Intel Xeon E5-2660 v4 CPU + 128GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**

(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate2006 = 427**

**SPECfp\_rate\_base2006 = 439**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32  
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-fp-model fast=2 -auto-ilp32 -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-qopt-prefetch-issue-excl-hint

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32  
-ansi-alias -opt-mem-layout-trans=3 -qopt-prefetch-issue-excl-hint



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate2006 = 427

SPECfp\_rate\_base2006 = 439

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.lelie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 6



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant ML350 Gen9

(1.70 GHz, Intel Xeon E5-2609 v4)

SPECfp\_rate2006 = 427

SPECfp\_rate\_base2006 = 439

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -static(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen9**

(1.70 GHz, Intel Xeon E5-2609 v4)

**SPECfp\_rate2006 = 427**

**SPECfp\_rate\_base2006 = 439**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jun-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jun 28 17:30:52 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 June 2016.