



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp®_rate2006 = 589

SPECfp_rate_base2006 = 578

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

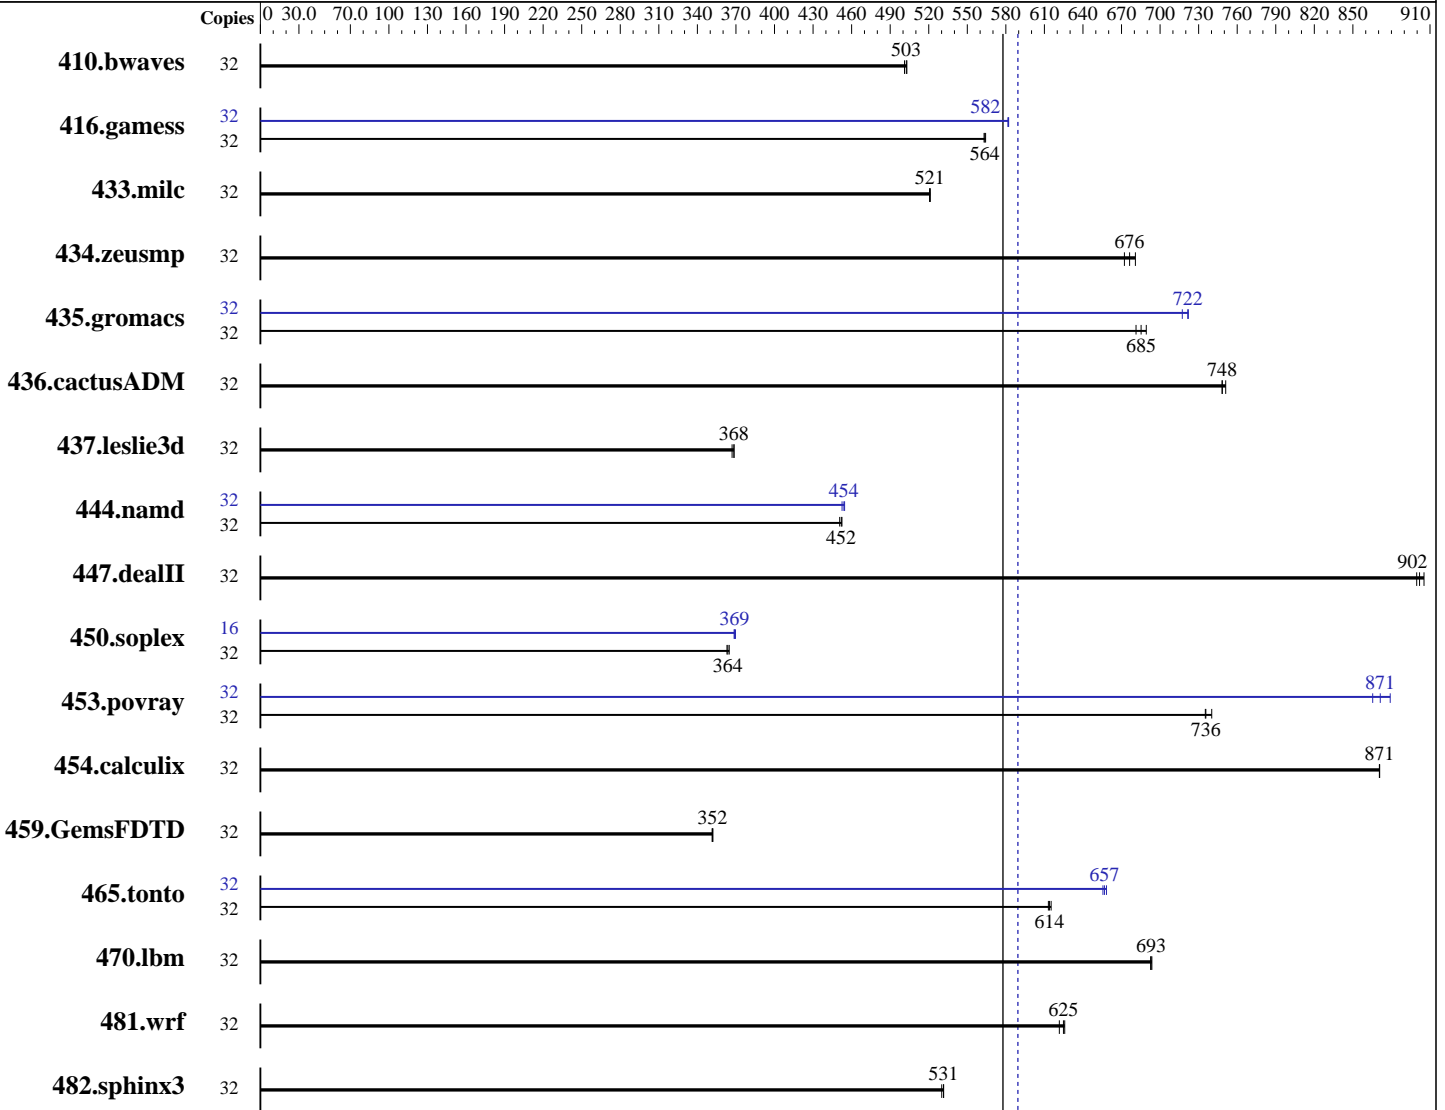

SPECfp_rate_base2006 = 578

SPECfp_rate2006 = 589

Hardware

CPU Name: Intel Xeon E5-2620 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = **589**

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate_base2006 = **578**

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	865	503	865	503	868	501	32	865	503	865	503	868	501		
416.gamess	32	1113	563	1112	564	1110	564	32	1077	582	1077	582	1076	582		
433.milc	32	564	521	564	521	564	521	32	564	521	564	521	564	521		
434.zeusmp	32	431	676	433	672	428	681	32	431	676	433	672	428	681		
435.gromacs	32	333	685	335	681	331	689	32	316	722	317	722	319	717		
436.cactusADM	32	511	748	511	748	509	751	32	511	748	511	748	509	751		
437.leslie3d	32	816	368	820	367	816	368	32	816	368	820	367	816	368		
444.namd	32	567	452	569	451	568	452	32	565	455	567	453	565	454		
447.dealII	32	407	900	404	905	406	902	32	407	900	404	905	406	902		
450.soplex	32	732	365	734	364	735	363	16	361	370	362	369	362	369		
453.povray	32	230	740	231	736	232	735	32	195	871	197	865	194	879		
454.calculix	32	303	871	303	871	303	871	32	303	871	303	871	303	871		
459.GemsFDTD	32	966	351	965	352	964	352	32	966	351	965	352	964	352		
465.tonto	32	513	614	512	615	514	613	32	480	656	478	658	479	657		
470.lbm	32	634	693	634	694	635	693	32	634	693	634	694	635	693		
481.wrf	32	575	622	572	625	571	626	32	575	622	572	625	571	626		
482.sphinx3	32	1173	531	1176	530	1173	532	32	1173	531	1176	530	1173	532		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 589

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate_base2006 = 578

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Platform Notes

BIOS Configuration:

Cluster On Die set to Disabled
 Early Snoop set to Disabled
 Performance Profile set to Custom
 ClE Support set to Disabled
 Core C3 set to Disabled
 Core C6 set to Disabled
 Thermal Profile set to High Fan Speed
 Memory Power Savings set to Disabled
 Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
 \$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
 running on RD650-MLK Fri May 27 02:59:36 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

From /proc/meminfo

```
MemTotal:      264556380 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.

os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 589

SPECfp_rate_base2006 = 578

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Platform Notes (Continued)

```
uname -a:
Linux RD650-MLK 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 26 15:18
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   691G  7.8G  684G   2% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO PB2TS335 01/09/2016

Memory:

8x NO DIMM NO DIMM

16x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 589

SPECfp_rate_base2006 = 578

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 589

SPECfp_rate_base2006 = 578

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 589

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate_base2006 = 578

CPU2006 license: 9017

Test date: May-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Mar-2016

Tested by: Lenovo Group Limited

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo ThinkServer RD650
(2.10 GHz, Intel Xeon E5-2620 v4)

SPECfp_rate2006 = 589

SPECfp_rate_base2006 = 578

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: May-2016

Hardware Availability: Mar-2016

Software Availability: Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jun 28 17:33:03 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 June 2016.