



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECint®\_rate2006 = 100

ASUS Q170M-C motherboard (Intel Pentium G4520)

SPECint\_rate\_base2006 = 95.8

CPU2006 license: 13


Test date: Mar-2016

Test sponsor: Intel Corporation

Hardware Availability: Sep-2015

Tested by: Intel Corporation

Software Availability: Aug-2015

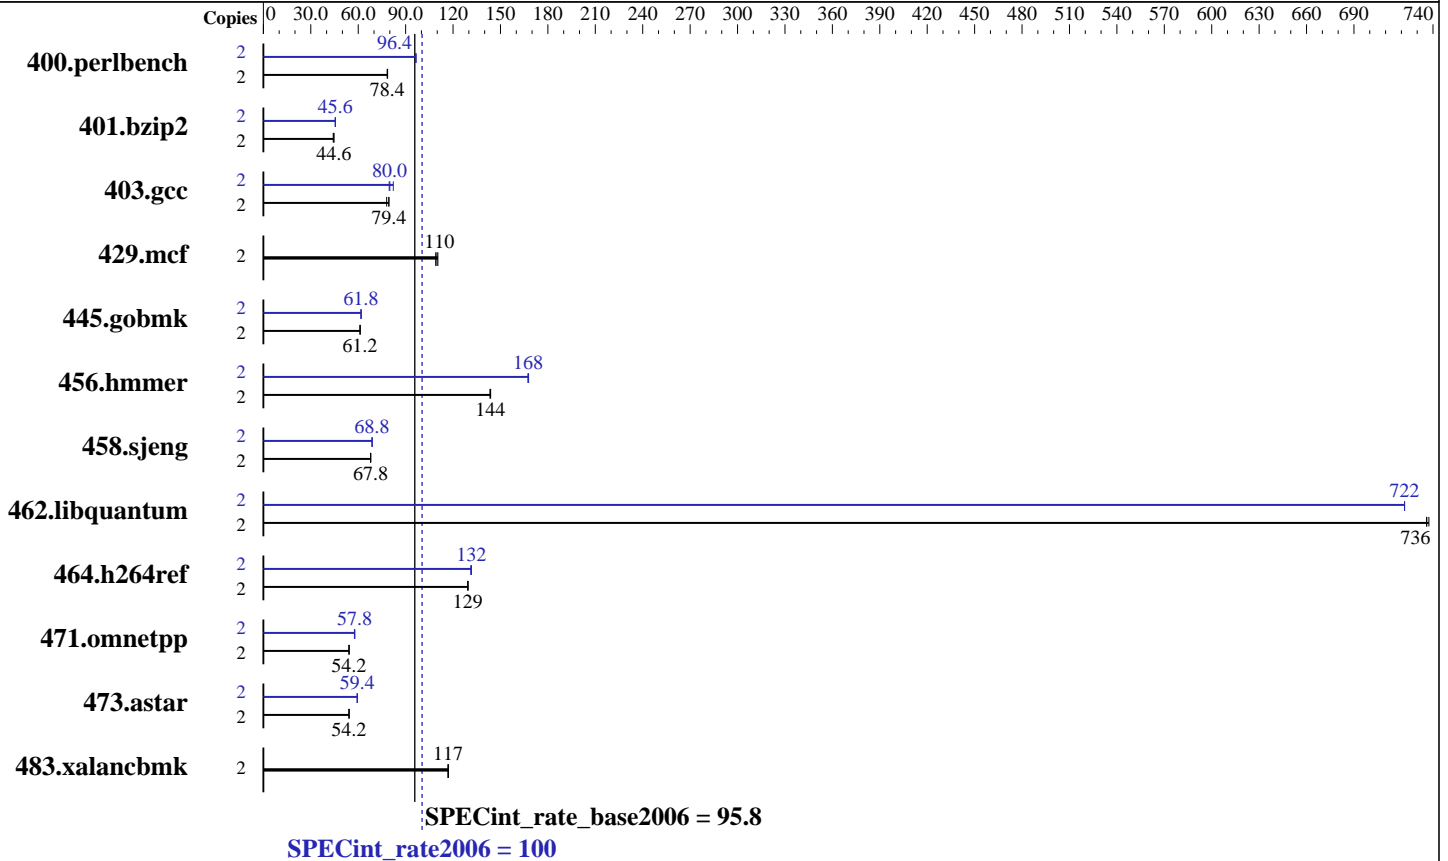

## Hardware

CPU Name: Intel Pentium G4520  
 CPU Characteristics:  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (2 x 4 GB 2Rx4 PC4-2133P-U)  
 Disk Subsystem: 1 TB Seagate Barracuda HDD, 7200 RPM  
 Other Hardware: None

## Software

Operating System: Microsoft Windows 7 Professional 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows;  
 Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 11.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECint\_rate2006 = 100

ASUS Q170M-C motherboard (Intel Pentium G4520)

SPECint\_rate\_base2006 = 95.8

CPU2006 license: 13

Test date: Mar-2016

Test sponsor: Intel Corporation

Hardware Availability: Sep-2015

Tested by: Intel Corporation

Software Availability: Aug-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	<b>249</b>	<b>78.4</b>	249	78.4	248	78.6	2	202	96.6	<b>203</b>	<b>96.4</b>	203	96.4
401.bzip2	2	434	44.6	<b>434</b>	<b>44.6</b>	436	44.2	2	424	45.4	<b>424</b>	<b>45.6</b>	423	45.6
403.gcc	2	206	78.0	203	79.4	<b>203</b>	<b>79.4</b>	2	<b>202</b>	<b>80.0</b>	202	79.6	196	82.2
429.mcf	2	165	110	<b>166</b>	<b>110</b>	167	109	2	165	110	<b>166</b>	<b>110</b>	167	109
445.gobmk	2	343	61.2	<b>343</b>	<b>61.2</b>	343	61.2	2	340	61.8	340	61.8	<b>340</b>	<b>61.8</b>
456.hammer	2	130	143	<b>130</b>	<b>144</b>	130	144	2	<b>111</b>	<b>168</b>	112	167	111	168
458.sjeng	2	357	67.8	<b>357</b>	<b>67.8</b>	356	68.0	2	352	68.8	352	68.8	<b>352</b>	<b>68.8</b>
462.libquantum	2	<b>56.3</b>	<b>736</b>	56.3	736	56.2	737	2	57.4	722	<b>57.4</b>	<b>722</b>	57.4	722
464.h264ref	2	342	129	<b>342</b>	<b>129</b>	342	129	2	<b>336</b>	<b>132</b>	336	132	337	131
471.omnetpp	2	<b>231</b>	<b>54.2</b>	231	54.2	231	54.2	2	217	57.8	217	57.6	<b>217</b>	<b>57.8</b>
473.astar	2	<b>259</b>	<b>54.2</b>	259	54.2	259	54.2	2	<b>236</b>	<b>59.4</b>	236	59.4	236	59.4
483.xalancbmk	2	118	117	118	117	<b>118</b>	<b>117</b>	2	118	117	118	117	<b>118</b>	<b>117</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 16.0 was set up to generate 32-bit binaries with the command:  
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2016 program folder)

## Platform Notes

Sysinfo program C:\SPEC16.0\Docs\sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on CltF832E48859C5 Tue Mar 15 21:42:57 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Professional
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 94 Stepping 3 GenuineIntel ~3600 Mhz
BIOS Version  : American Megatrends Inc. 0704, 1/12/2016
Total Physical Memory: 8,070 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECint\_rate2006 = 100

ASUS Q170M-C motherboard (Intel Pentium G4520)

SPECint\_rate\_base2006 = 95.8

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Mar-2016  
Hardware Availability: Sep-2015  
Software Availability: Aug-2015

## Platform Notes (Continued)

L2CacheSize : 512  
L3CacheSize : 3072  
MaxClockSpeed : 3600  
Name : Intel(R) Pentium(R) CPU G4520 @ 3.60GHz  
NumberOfCores : 2  
NumberOfLogicalProcessors: 2

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## General Notes

Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU  
+ 64GB memory using Windows 8.1 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:  
icl -Qvc12 -Qstd=c99  
  
C++ benchmarks:  
icl -Qvc12

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DWIN32  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000  
  
C++ benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F256000000 shlw32M.lib -link /FORCE:MULTIPLE



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECint\_rate2006 = 100

ASUS Q170M-C motherboard (Intel Pentium G4520)

SPECint\_rate\_base2006 = 95.8

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Mar-2016  
Hardware Availability: Sep-2015  
Software Availability: Aug-2015

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc12 -Qstd=c99

456.hmmr: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe

458.sjeng: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe

462.libquantum: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe  
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc12

473.astar: C:\Program Files (x86)\IntelSWTools\parallel\_studio\_xe\_2016.0.041ompilers\_and\_libraries\_2016\windows/bin/intel64/icl.exe

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
456.hmmr: -DSPEC\_CPU\_P64  
458.sjeng: -DSPEC\_CPU\_P64  
462.libquantum: -DSPEC\_CPU\_P64  
464.h264ref: -DWIN32  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -Qoption,cpp,--no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F256000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzp2: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F256000000

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECint\_rate2006 = 100

ASUS Q170M-C motherboard (Intel Pentium G4520)

SPECint\_rate\_base2006 = 95.8

CPU2006 license: 13

Test date: Mar-2016

Test sponsor: Intel Corporation

Hardware Availability: Sep-2015

Tested by: Intel Corporation

Software Availability: Aug-2015

## Peak Optimization Flags (Continued)

403.gcc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F256000000

456.hmmer: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)  
-Qopt-prefetch(1) /F256000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo(1) -O3(1) -Qprec-div-(1)  
-Qunroll4(1) /F256000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F256000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F256000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F256000000 shlW32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F256000000 shlW64M.lib

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

```
456hmmer -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041\compilers_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
458sjeng -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041\compilers_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
462libquantum -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.041\compilers_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 12.0/VC/lib/AMD64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.  
(Test Sponsor: Intel Corporation)

SPECint\_rate2006 = 100

ASUS Q170M-C motherboard (Intel Pentium G4520)

SPECint\_rate\_base2006 = 95.8

CPU2006 license: 13  
Test sponsor: Intel Corporation  
Tested by: Intel Corporation

Test date: Mar-2016  
Hardware Availability: Sep-2015  
Software Availability: Aug-2015

## Peak Other Flags (Continued)

C++ benchmarks:

```
473.exe -link /FORCE:MULTIPLE -link -LIBPATH:C:\Program Files (x86)\IntelSWTools\parallel_studio_xe_2016.0.04\compiler_and_libraries_2016\windows\compiler\lib\intel64 -link -LIBPATH:C:\Program Files (x86)\Microsoft SDKs\Windows7.1A\lib
```

```
-link -LIBPATH:C:\Program Files (x86)\Microsoft Visual Studio 12.0\VC\lib\AMD64
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Sep 13 11:42:52 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 July 2016.