



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint®_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

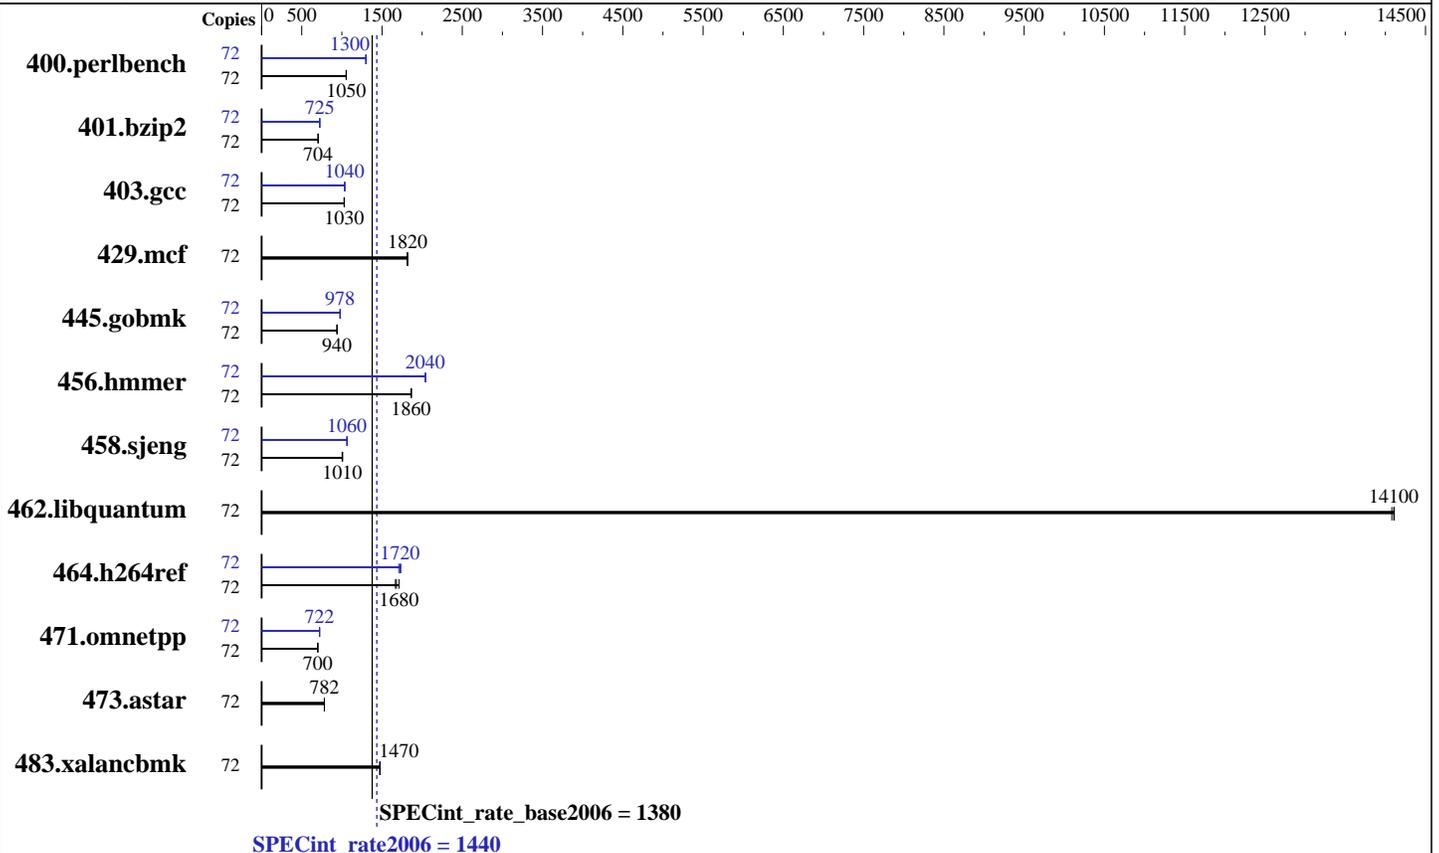

Hardware

CPU Name: Intel Xeon E5-2695 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 45 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 2 x 400 GB SAS SSD, RAID 1
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.el7.x86_64
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	668	1050	666	1060	668	1050	72	541	1300	542	1300	541	1300
401.bzip2	72	988	703	987	704	985	706	72	958	725	958	725	960	724
403.gcc	72	562	1030	564	1030	563	1030	72	559	1040	561	1030	558	1040
429.mcf	72	361	1820	362	1810	361	1820	72	361	1820	362	1810	361	1820
445.gobmk	72	803	940	804	940	804	939	72	774	976	770	981	773	978
456.hammer	72	360	1870	361	1860	361	1860	72	329	2040	329	2040	329	2040
458.sjeng	72	862	1010	868	1000	866	1010	72	818	1060	819	1060	819	1060
462.libquantum	72	106	14100	106	14100	106	14100	72	106	14100	106	14100	106	14100
464.h264ref	72	948	1680	956	1670	931	1710	72	918	1740	932	1710	924	1720
471.omnetpp	72	643	700	642	701	643	700	72	623	722	622	723	624	722
473.astar	72	645	783	647	782	646	782	72	645	783	647	782	646	782
483.xalancbmk	72	338	1470	337	1470	337	1480	72	338	1470	337	1470	337	1480

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Platform Notes

BIOS Configuration: (intel bin, mvb)
Power Profile set to Custom
Power Regulator set to Static High Performance Mode
Minimum Processor Idle Power Core C-State set to C6 State
Energy/Performance Bias set to Balance Performance
Minimum Processor Idle Power Package C-State set to No Package State
QPI Snoop Configuration set to Cluster on Die
Collaborative Power Control set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Double Refresh Rate set to 1x Refresh
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9
(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes (Continued)

```
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on mvb-xl420-g9 Fri Jun 3 15:11:30 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2695 v4 @ 2.10GHz
 2 "physical id"s (chips)
 72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 23040 KB
```

```
From /proc/meminfo
MemTotal: 263705320 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux mvb-xl420-g9 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 3 15:08

```
SPEC is set to: /cpu2006
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda4 xfs 364G 57G 308G 16% /
Additional information from dmidecode:
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9
(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U19 05/05/2016

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:
8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Peak Portability Flags (Continued)

483.xalanbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL420 Gen9

(2.10 GHz, Intel Xeon E5-2695 v4)

SPECint_rate2006 = 1440

SPECint_rate_base2006 = 1380

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 12 11:03:35 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 July 2016.