



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF, Intel Xeon D-1531)

SPECfp®_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2016

Hardware Availability: Nov-2015

Software Availability: Sep-2015

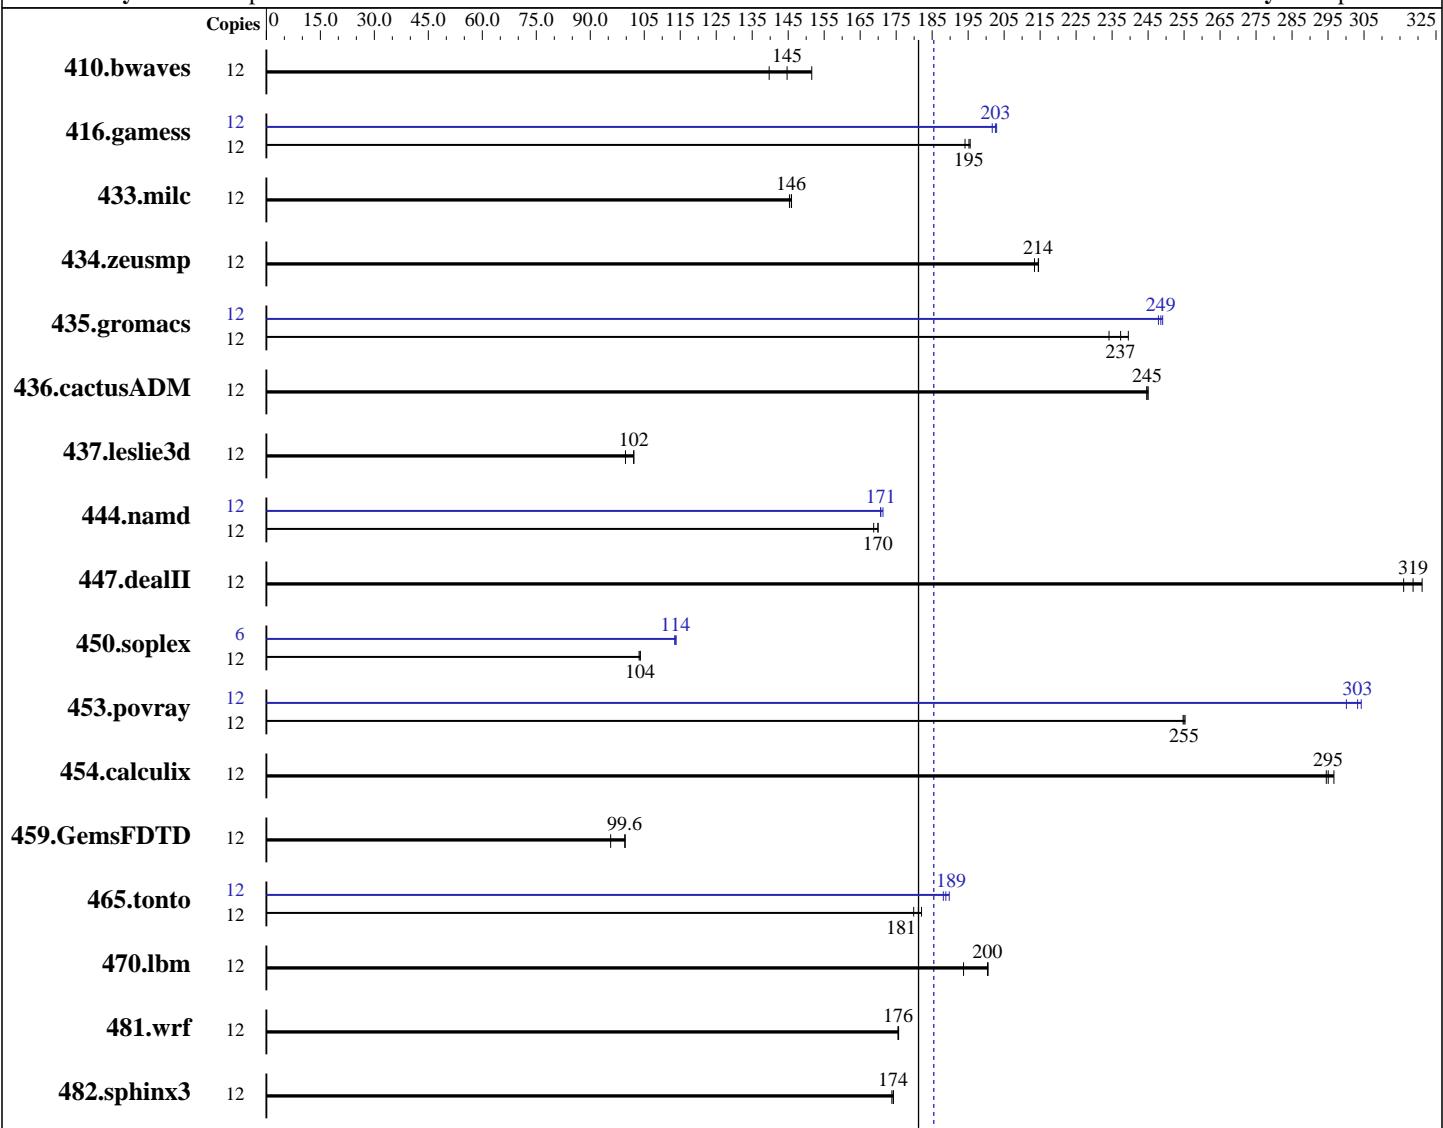

Hardware

CPU Name: Intel Xeon D-1531
CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP1, Kernel 3.12.49-11-default
Compiler:
Auto Parallel:
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF, Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

L3 Cache: 9 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (4 x 16 GB 1Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 240 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1167	140	<u>1127</u>	<u>145</u>	1076	152	12	1167	140	<u>1127</u>	<u>145</u>	1076	152
416.gamess	12	<u>1204</u>	<u>195</u>	1210	194	1201	196	12	<u>1160</u>	<u>203</u>	1165	202	1158	203
433.milc	12	758	145	755	146	<u>755</u>	<u>146</u>	12	758	145	755	146	<u>755</u>	<u>146</u>
434.zeusmp	12	512	213	509	215	<u>509</u>	<u>214</u>	12	512	213	509	215	<u>509</u>	<u>214</u>
435.gromacs	12	366	234	358	240	<u>361</u>	<u>237</u>	12	344	249	346	248	<u>345</u>	<u>249</u>
436.cactusADM	12	586	245	<u>586</u>	<u>245</u>	585	245	12	586	245	<u>586</u>	<u>245</u>	585	245
437.leslie3d	12	1131	99.8	<u>1105</u>	<u>102</u>	1105	102	12	1131	99.8	<u>1105</u>	<u>102</u>	1105	102
444.namd	12	<u>566</u>	<u>170</u>	570	169	566	170	12	562	171	564	171	<u>564</u>	<u>171</u>
447.dealII	12	427	321	434	316	<u>431</u>	<u>319</u>	12	427	321	434	316	<u>431</u>	<u>319</u>
450.soplex	12	966	104	963	104	<u>964</u>	<u>104</u>	6	439	114	441	113	<u>440</u>	<u>114</u>
453.povray	12	<u>250</u>	<u>255</u>	250	255	251	255	12	<u>211</u>	<u>303</u>	213	300	210	304
454.calculix	12	336	295	334	297	<u>336</u>	<u>295</u>	12	336	295	334	297	<u>336</u>	<u>295</u>
459.GemsFDTD	12	1331	95.7	1277	99.7	<u>1279</u>	<u>99.6</u>	12	1331	95.7	1277	99.7	<u>1279</u>	<u>99.6</u>
465.tonto	12	656	180	649	182	<u>652</u>	<u>181</u>	12	<u>625</u>	<u>189</u>	628	188	622	190
470.lbm	12	851	194	<u>823</u>	<u>200</u>	822	201	12	851	194	<u>823</u>	<u>200</u>	822	201
481.wrf	12	764	176	<u>763</u>	<u>176</u>	763	176	12	764	176	<u>763</u>	<u>176</u>	763	176
482.sphinx3	12	1342	174	1346	174	<u>1343</u>	<u>174</u>	12	1342	174	1346	174	<u>1343</u>	<u>174</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF , Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$
running on linux-ux9z Thu Jun 30 04:57:06 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU D-1531 @ 2.20GHz
        1 "physical id"s (chips)
        12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings : 12
    physical 0: cores 0 1 2 3 4 5
cache size : 9216 KB
```

```
From /proc/meminfo
MemTotal:       65814800 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-ux9z 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Jun 29 16:43
```

SPEC is set to: /usr/cpu2006

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF , Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	217G	117G	100G	54%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0 05/13/2016

Memory:

4x Micron 18ADDF2G72PZ-2G3A1 16 GB 1 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF , Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

Base Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF , Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll14 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF , Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5038MD-H24TRF
(X10SDE-DF , Intel Xeon D-1531)

SPECfp_rate2006 = 185

SPECfp_rate_base2006 = 181

CPU2006 license: 001176

Test date: Jun-2016

Test sponsor: Supermicro

Hardware Availability: Nov-2015

Tested by: Supermicro

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jul 26 16:13:31 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 July 2016.