



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint®\_rate2006 = 5960

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 5720

CPU2006 license: 9017


Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

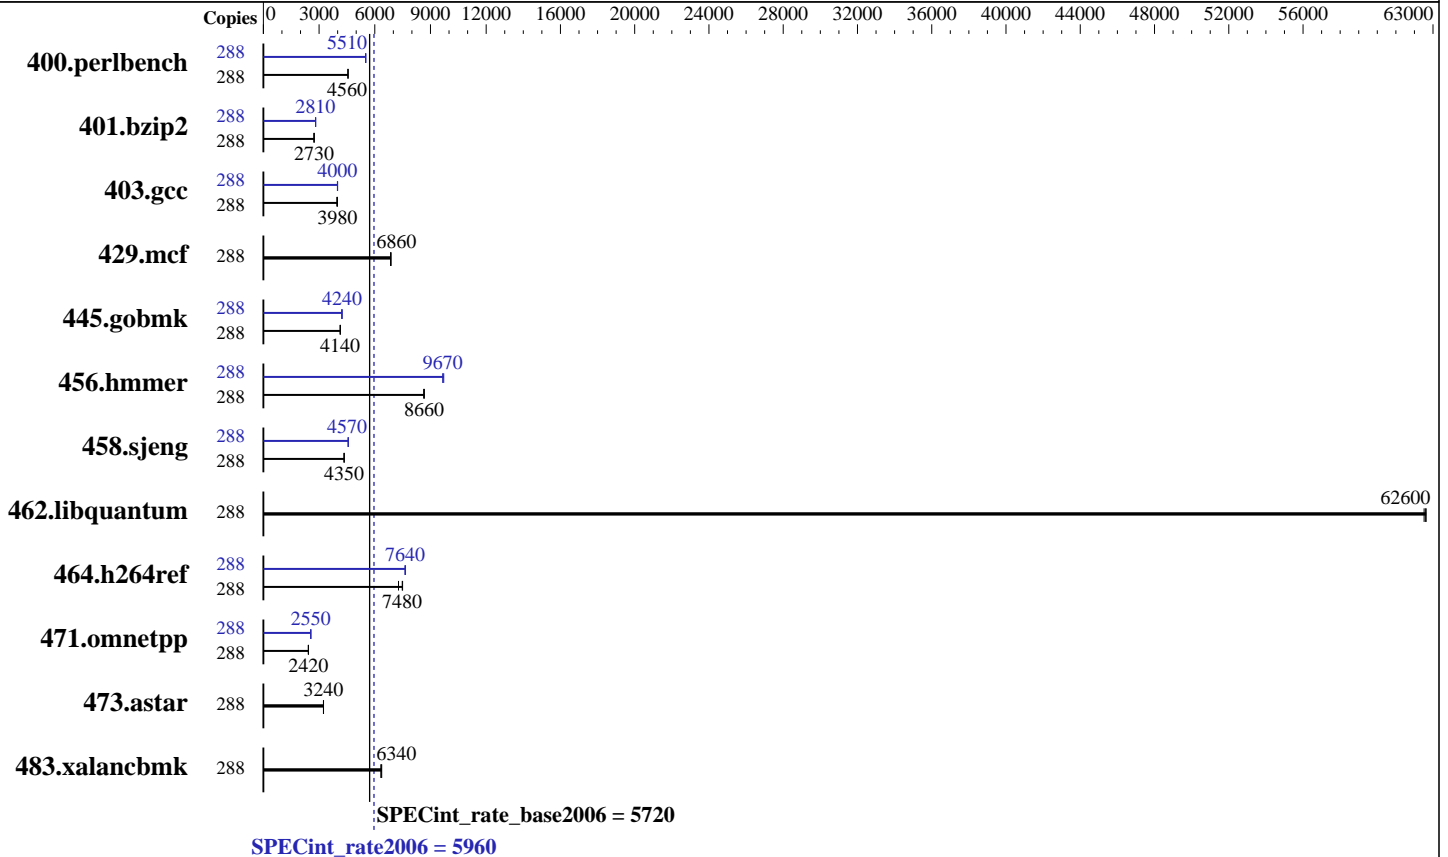

### Hardware

CPU Name: Intel Xeon E7-8867 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 4,8 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 2 x 600 GB 15000 RPM SAS, RAID 1  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.2.181 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 5960

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 5720

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	288	<b>617</b>	<b>4560</b>	618	4560	617	4560	288	<b>510</b>	<b>5510</b>	510	5520	511	5510
401.bzip2	288	1021	2720	1014	2740	<b>1017</b>	<b>2730</b>	288	987	2820	988	2810	<b>988</b>	<b>2810</b>
403.gcc	288	<b>582</b>	<b>3980</b>	581	3990	586	3960	288	580	4000	582	3990	<b>580</b>	<b>4000</b>
429.mcf	288	382	6880	<b>383</b>	<b>6860</b>	383	6850	288	382	6880	<b>383</b>	<b>6860</b>	383	6850
445.gobmk	288	730	4140	728	4150	<b>730</b>	<b>4140</b>	288	716	4220	713	4240	<b>713</b>	<b>4240</b>
456.hammer	288	311	8630	310	8670	<b>310</b>	<b>8660</b>	288	277	9720	278	9670	<b>278</b>	<b>9670</b>
458.sjeng	288	<b>801</b>	<b>4350</b>	801	4350	801	4350	288	<b>762</b>	<b>4570</b>	762	4570	763	4560
462.libquantum	288	95.3	62600	<b>95.3</b>	<b>62600</b>	95.4	62500	288	95.3	62600	<b>95.3</b>	<b>62600</b>	95.4	62500
464.h264ref	288	876	7280	850	7500	<b>852</b>	<b>7480</b>	288	833	7660	835	7630	<b>834</b>	<b>7640</b>
471.omnetpp	288	742	2430	<b>742</b>	<b>2420</b>	742	2420	288	<b>705</b>	<b>2550</b>	705	2550	704	2560
473.astar	288	624	3240	<b>624</b>	<b>3240</b>	625	3240	288	624	3240	<b>624</b>	<b>3240</b>	625	3240
483.xalancbmk	288	314	6330	<b>313</b>	<b>6340</b>	312	6370	288	314	6330	<b>313</b>	<b>6340</b>	312	6370

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches

## Platform Notes

BIOS Configuration:  
Operating Mode set to "Maximum Performance"  
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on X3950-01-SLES12SP1 Thu Jul 14 15:03:38 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8867 v4 @ 2.40GHz  
8 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint\_rate2006 = 5960

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 5720

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

### Platform Notes (Continued)

288 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      1058539016 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux X3950-01-SLES12SP1 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC
2015 (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 14 14:58
```

```
SPEC is set to: /home/cpu2006-1.2-ic16.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   512G  6.6G  506G   2% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECint\_rate2006 = 5960

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

SPECint\_rate\_base2006 = 5720

CPU2006 license: 9017

Test date: Jul-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Jun-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[A9E135CUS-3.10]- 06/16/2016

Memory:

128x NO DIMM Unknown

64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB

memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 5960**

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

**SPECint\_rate\_base2006 = 5720**

**CPU2006 license:** 9017

**Test date:** Jul-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2016

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 5960**

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

**SPECint\_rate\_base2006 = 5720**

**CPU2006 license:** 9017

**Test date:** Jul-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2016

## Peak Portability Flags (Continued)

483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint\_rate2006 = 5960**

Lenovo System x3950 X6  
(2.40 GHz, Intel Xeon E7-8867 v4)

**SPECint\_rate\_base2006 = 5720**

**CPU2006 license:** 9017

**Test date:** Jul-2016

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Jun-2016

**Tested by:** Lenovo Group Limited

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-BDW-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 9 17:04:51 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 August 2016.