



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55


Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

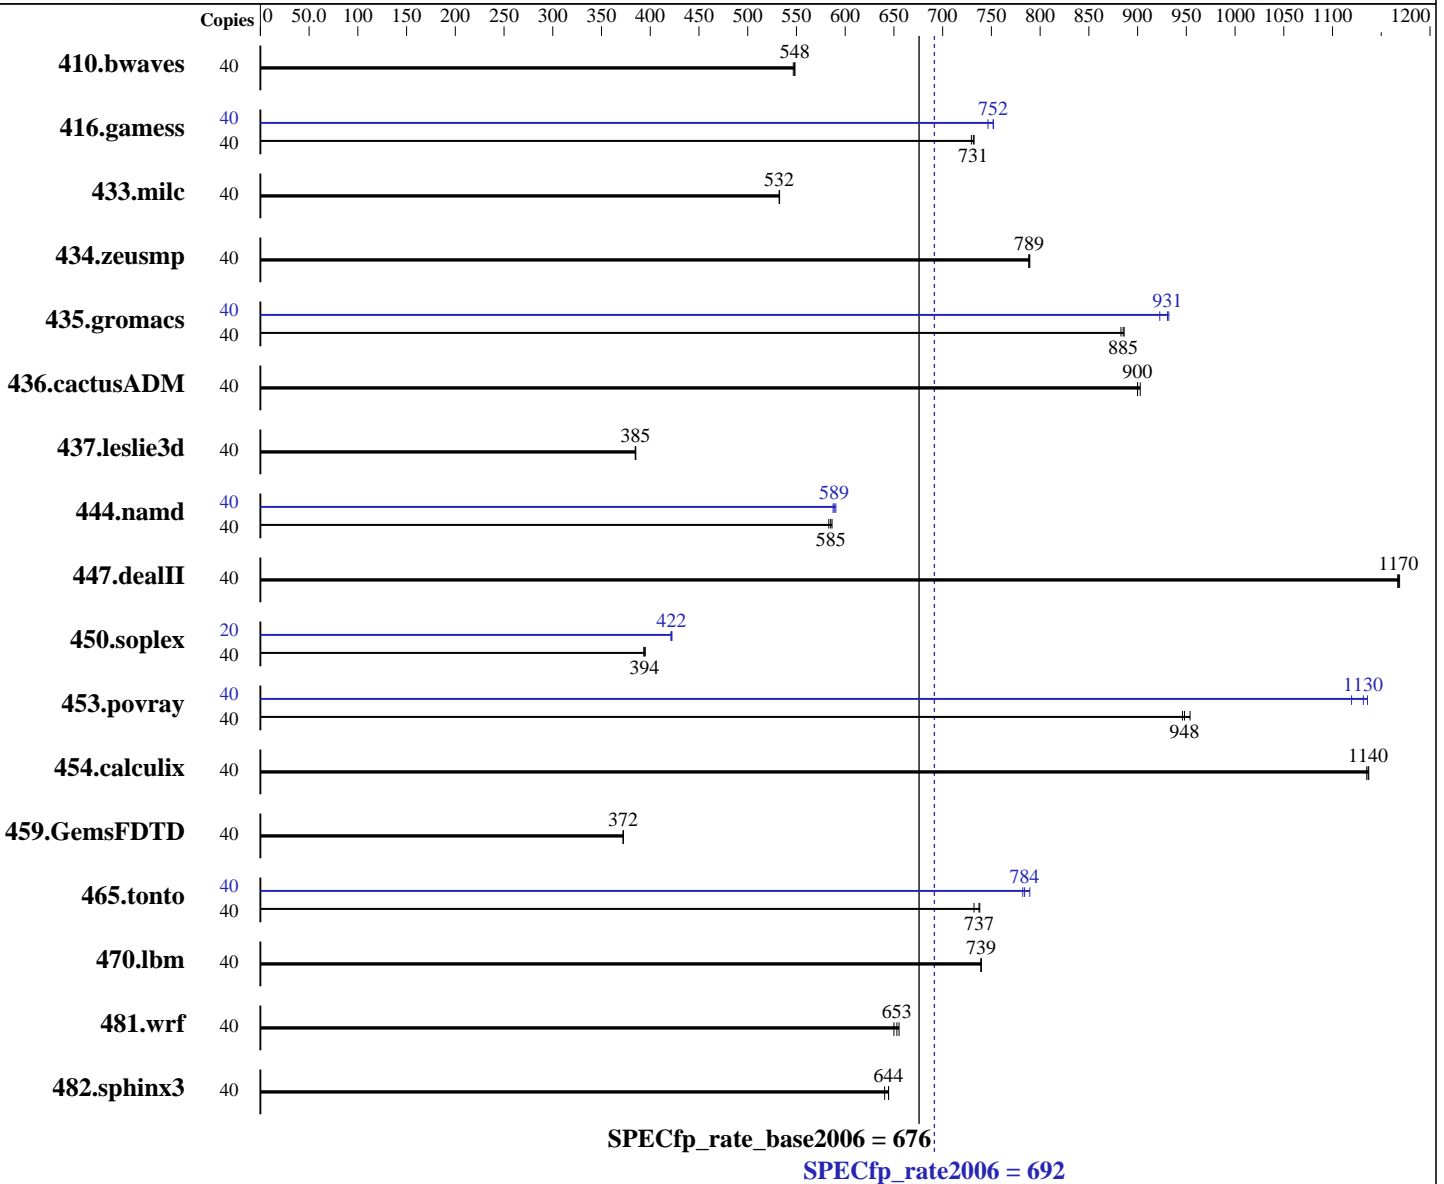

### Hardware

CPU Name: Intel Xeon E5-2640 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
Disk Subsystem: 1 x 240 GB SATA SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

| Benchmark     | Base   |            |            |             |             |            |             |        | Peak       |            |             |             |            |             |  |  |
|---------------|--------|------------|------------|-------------|-------------|------------|-------------|--------|------------|------------|-------------|-------------|------------|-------------|--|--|
|               | Copies | Seconds    | Ratio      | Seconds     | Ratio       | Seconds    | Ratio       | Copies | Seconds    | Ratio      | Seconds     | Ratio       | Seconds    | Ratio       |  |  |
| 410.bwaves    | 40     | <b>991</b> | <b>548</b> | 994         | 547         | 991        | 548         | 40     | <b>991</b> | <b>548</b> | 994         | 547         | 991        | 548         |  |  |
| 416.gamess    | 40     | 1070       | 732        | <b>1071</b> | <b>731</b>  | 1074       | 729         | 40     | 1049       | 747        | <b>1042</b> | <b>752</b>  | 1041       | 752         |  |  |
| 433.milc      | 40     | 689        | 533        | <b>690</b>  | <b>532</b>  | 690        | 532         | 40     | 689        | 533        | <b>690</b>  | <b>532</b>  | 690        | 532         |  |  |
| 434.zeusmp    | 40     | 461        | 789        | <b>462</b>  | <b>789</b>  | 462        | 788         | 40     | 461        | 789        | <b>462</b>  | <b>789</b>  | 462        | 788         |  |  |
| 435.gromacs   | 40     | 322        | 886        | 323         | 883         | <b>323</b> | <b>885</b>  | 40     | <b>307</b> | <b>931</b> | 306         | 932         | 309        | 923         |  |  |
| 436.cactusADM | 40     | 530        | 903        | 531         | 900         | <b>531</b> | <b>900</b>  | 40     | 530        | 903        | 531         | 900         | <b>531</b> | <b>900</b>  |  |  |
| 437.leslie3d  | 40     | 978        | 385        | <b>977</b>  | <b>385</b>  | 976        | 385         | 40     | 978        | 385        | <b>977</b>  | <b>385</b>  | 976        | 385         |  |  |
| 444.namd      | 40     | <b>548</b> | <b>585</b> | 547         | 586         | 550        | 583         | 40     | <b>545</b> | <b>589</b> | 546         | 588         | 543        | 590         |  |  |
| 447.dealII    | 40     | 392        | 1170       | <b>392</b>  | <b>1170</b> | 392        | 1170        | 40     | 392        | 1170       | <b>392</b>  | <b>1170</b> | 392        | 1170        |  |  |
| 450.soplex    | 40     | 845        | 395        | <b>847</b>  | <b>394</b>  | 848        | 393         | 20     | 395        | 422        | 396         | 421         | <b>395</b> | <b>422</b>  |  |  |
| 453.povray    | 40     | 223        | 954        | 225         | 946         | <b>224</b> | <b>948</b>  | 40     | 187        | 1140       | 190         | 1120        | <b>188</b> | <b>1130</b> |  |  |
| 454.calculix  | 40     | 290        | 1140       | 291         | 1140        | <b>290</b> | <b>1140</b> | 40     | 290        | 1140       | 291         | 1140        | <b>290</b> | <b>1140</b> |  |  |
| 459.GemsFDTD  | 40     | 1140       | 372        | <b>1140</b> | <b>372</b>  | 1140       | 372         | 40     | 1140       | 372        | <b>1140</b> | <b>372</b>  | 1140       | 372         |  |  |
| 465.tonto     | 40     | 538        | 732        | 533         | 738         | <b>534</b> | <b>737</b>  | 40     | 499        | 789        | 503         | 782         | <b>502</b> | <b>784</b>  |  |  |
| 470.lbm       | 40     | 743        | 739        | 743         | 740         | <b>743</b> | <b>739</b>  | 40     | 743        | 739        | 743         | 740         | <b>743</b> | <b>739</b>  |  |  |
| 481.wrf       | 40     | <b>684</b> | <b>653</b> | 682         | 655         | 687        | 650         | 40     | <b>684</b> | <b>653</b> | 682         | 655         | 687        | 650         |  |  |
| 482.sphinx3   | 40     | 1210       | 645        | <b>1210</b> | <b>644</b>  | 1217       | 640         | 40     | 1210       | 645        | <b>1210</b> | <b>644</b>  | 1217       | 640         |  |  |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Snoop Mode set to Cluster on Die  
Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Platform Notes (Continued)

System Profile set to custom  
 CPU Power Management set to Hardware P States  
 C States set to Autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Balanced Performance  
 Memory Patrol Scrub disabled  
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6914  
 \$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1  
 running on localhost.localdomain Sat Jul 2 05:25:30 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
model name : Intel(R) Xeon(R) CPU E5-2640 v4@ 2.40GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      264039396 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Platform Notes (Continued)

```
run-level 3 Jul 1 18:03 last=5
```

```
SPEC is set to: /root/cpu2006-1.2
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   234G  8.1G  226G   4% /
```

```
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS Dell Inc. 2.2.1 06/07/2016
```

```
Memory:
```

```
8x 00CE00B300CE M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz, configured at 2133
MHz
```

```
(End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
```

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
```

```
Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
memory using RedHat EL 7.2 glibc 2.17
```

```
Transparent Huge Pages enabled with:
```

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

```
Filesystem page cache cleared with:
```

```
echo 1> /proc/sys/vm/drop_caches
```

```
runspec command invoked through numactl i.e.:
```

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

```
C benchmarks:
```

```
icc -m64
```

```
C++ benchmarks:
```

```
icpc -m64
```

```
Fortran benchmarks:
```

```
ifort -m64
```

```
Benchmarks using both Fortran and C:
```

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

## Peak Optimization Flags (Continued)

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 692

PowerEdge FC430 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate\_base2006 = 676

CPU2006 license: 55

Test date: Jul-2016

Test sponsor: Dell Inc.

Hardware Availability: Jun-2016

Tested by: Dell Inc.

Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 24 13:13:26 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 August 2016.