SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint®_rate2006 = 1960

SPECint_rate_base2006 = 1850

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Sep-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

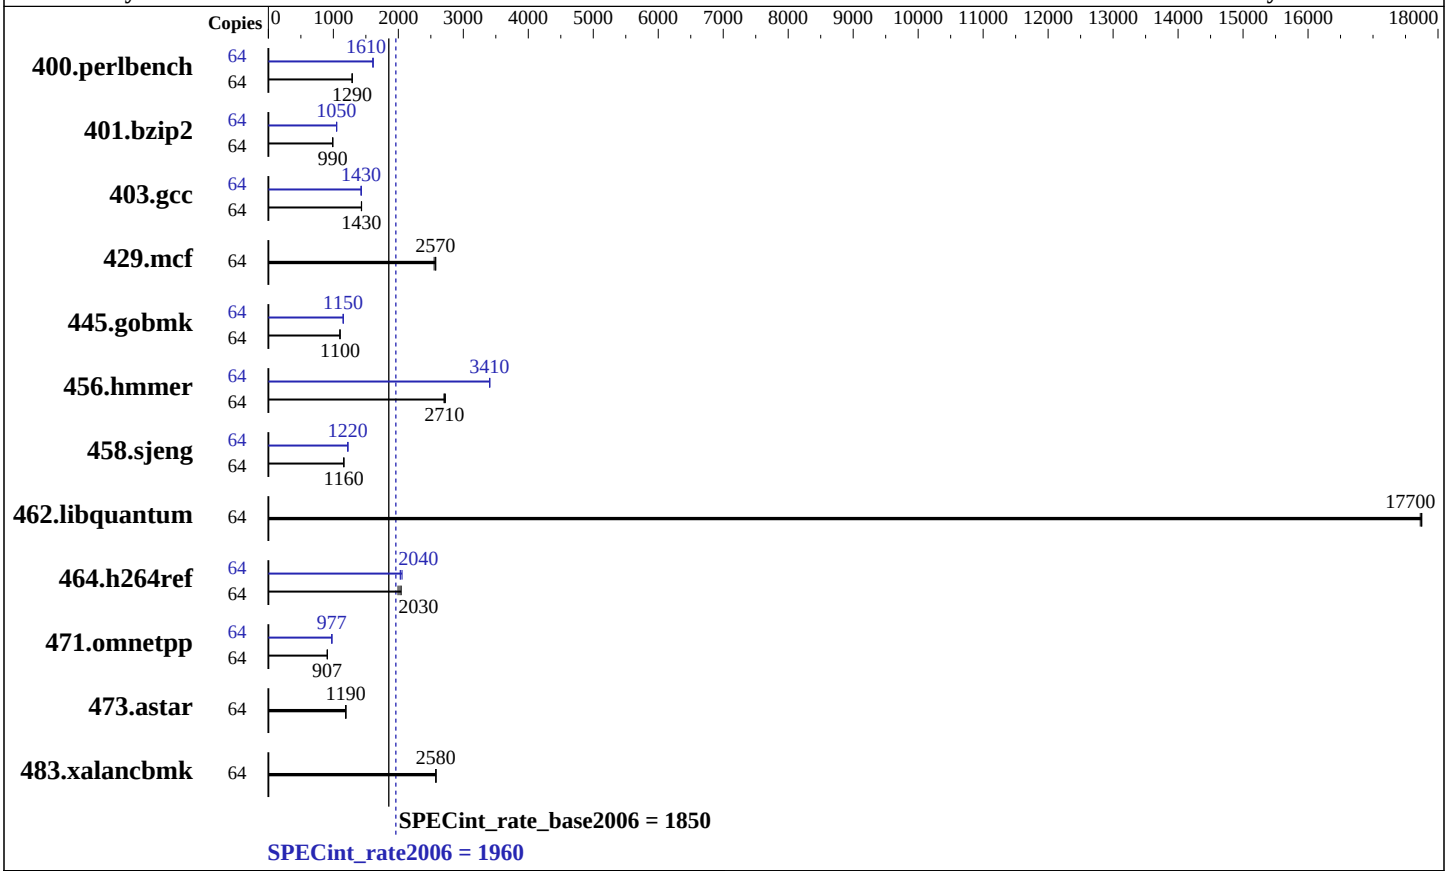

Hardware

CPU Name:	Intel Xeon E7-8893 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	3200
FPU:	Integrated
CPU(s) enabled:	32 cores, 8 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	2,4,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	60 MB I+D on chip per chip
Other Cache:	None
Memory:	3 TB (192 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	2 x 600 GB SAS, 15000 RPM, RAID1
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-8893 v4)

SPECint_rate2006 = 1960

SPECint_rate_base2006 = 1850

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Sep-2016
Hardware Availability: Jun-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	484	1290	**485**	**1290**	485	1290	64	**388**	**1610**	389	1610	388	1610
401.bzip2	64	623	991	624	989	**624**	**990**	64	589	1050	587	1050	**588**	**1050**
403.gcc	64	359	1430	**359**	**1430**	360	1430	64	**361**	**1430**	361	1430	360	1430
429.mcf	64	229	2550	**227**	**2570**	227	2580	64	229	2550	**227**	**2570**	227	2580
445.gobmk	64	**609**	**1100**	610	1100	608	1100	64	**583**	**1150**	583	1150	583	1150
456.hmmer	64	**220**	**2710**	219	2720	221	2700	64	175	3410	175	3400	**175**	**3410**
458.sjeng	64	**667**	**1160**	666	1160	668	1160	64	**633**	**1220**	633	1220	634	1220
462.libquantum	64	74.8	17700	74.7	17800	**74.7**	**17700**	64	74.8	17700	74.7	17800	**74.7**	**17700**
464.h264ref	64	693	2040	710	2000	**699**	**2030**	64	698	2030	**696**	**2040**	688	2060
471.omnetpp	64	441	908	441	906	**441**	**907**	64	409	977	410	976	**409**	**977**
473.astar	64	378	1190	376	1190	**377**	**1190**	64	378	1190	376	1190	**377**	**1190**
483.xalancbmk	64	**171**	**2580**	171	2580	171	2580	64	**171**	**2580**	171	2580	171	2580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
 Memory Power Management = Automatic
 Active Energy Manager = "Capping Disabled"
 Platform Controlled Type = "Maximum Performance"
 C1 Enhanced Mode = Disable
 Sysinfo program /home/cpu2006/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on rhel7264 Fri Sep 16 09:19:32 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8893 v4 @ 3.20GHz
       8 "physical id"s (chips)
       64 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 4
         siblings  : 8
         physical 0: cores 12 13 25 26
         physical 1: cores 12 13 25 26
         physical 2: cores 12 13 25 26
         physical 3: cores 12 13 25 26
         physical 4: cores 12 13 25 26
         physical 5: cores 12 13 25 26
         physical 6: cores 12 13 25 26
         physical 7: cores 12 13 25 26
      cache size : 61440 KB

   From /proc/meminfo
      MemTotal:       3169800748 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.2 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.2"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

   uname -a:
      Linux rhel7264 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Sep 16 09:14

   SPEC is set to: /home/cpu2006
      Filesystem            Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-home xfs   504G   12G  493G   3% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS HITACHI 11-04 08/29/2016
     Memory:
```

Continued on next page

Platform Notes (Continued)

```
      76x 0x0000 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x0001 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      6x 0x0003 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x0004 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x0200 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x0201 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x0603 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x0A0D M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      2x 0x5C00 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz
      96x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

  Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB
  memory using RedHat EL 7.2 glibc 2.17
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
  Hitachi Compute Blade 520X and BladeSymphony BS2500 are electronically equivalent.
  The results have been measured on a Hitachi Compute Blade 520X.
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
    401.bzip2: -D_FILE_OFFSET_BITS=64
      403.gcc: -D_FILE_OFFSET_BITS=64
      429.mcf: -D_FILE_OFFSET_BITS=64
    445.gobmk: -D_FILE_OFFSET_BITS=64
    456.hmmer: -D_FILE_OFFSET_BITS=64
    458.sjeng: -D_FILE_OFFSET_BITS=64
```

Continued on next page

Base Portability Flags (Continued)

462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-ansi-alias` `-opt-ra-region-strategy=block` `-Wl,-z,muldefs` `-L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.6.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 4 14:49:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 October 2016.