



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 1360

Express5800/A2040d (Intel Xeon E7-4820 v4)

SPECint_rate_base2006 = 1290

CPU2006 license: 9006


Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

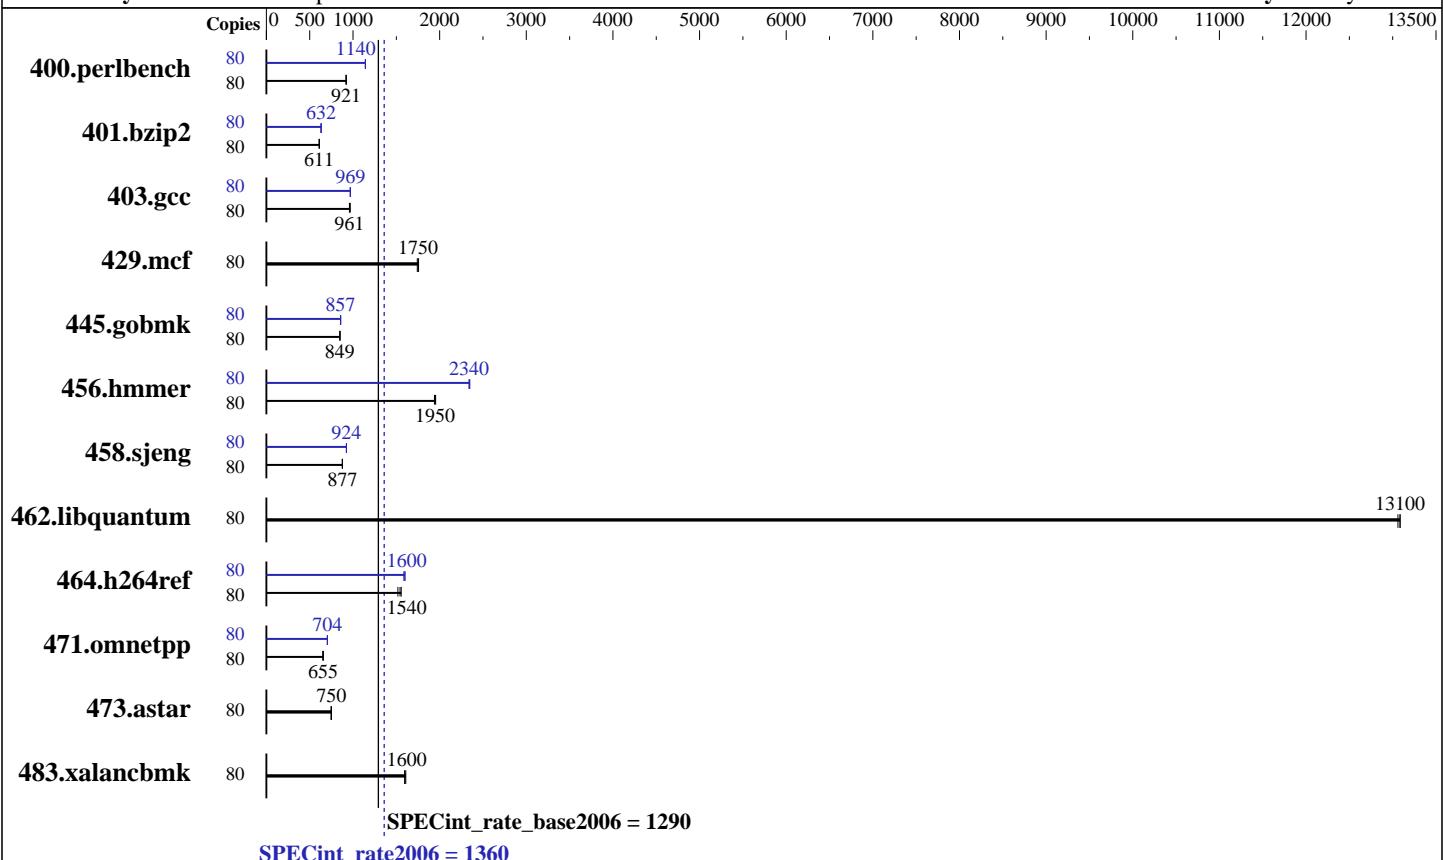

Hardware

CPU Name:	Intel Xeon E7-4820 v4
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (64 x 8 GB 1Rx4 PC4-2133P-R , running at 1333 MHz)
Disk Subsystem:	1 x 600 GB SAS, 15000 RPM, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.8 (Santiago) Kernel 2.6.32-642.el6.x86_64
Compiler:	C/C++: Version 16.0.0.109 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap Multi-Core V10.01



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 1360

Express5800/A2040d (Intel Xeon E7-4820 v4)

SPECint_rate_base2006 = 1290

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	849	921	848	921	849	921	80	684	1140	684	1140	684	1140
401.bzip2	80	1265	610	1264	611	1264	611	80	1222	632	1221	632	1224	631
403.gcc	80	670	961	665	968	672	959	80	664	969	665	968	664	969
429.mcf	80	415	1760	417	1750	419	1740	80	415	1760	417	1750	419	1740
445.gobmk	80	988	849	988	849	989	849	80	979	857	979	857	980	857
456.hammer	80	383	1950	385	1940	382	1950	80	319	2340	319	2340	318	2350
458.sjeng	80	1103	877	1104	877	1104	877	80	1048	924	1048	924	1047	924
462.libquantum	80	127	13100	127	13100	127	13100	80	127	13100	127	13100	127	13100
464.h264ref	80	1166	1520	1148	1540	1138	1560	80	1116	1590	1108	1600	1106	1600
471.omnetpp	80	763	655	768	651	761	657	80	709	705	710	704	711	703
473.astar	80	752	747	749	750	749	750	80	752	747	749	750	749	750
483.xalancbmk	80	346	1600	343	1610	345	1600	80	346	1600	343	1610	345	1600

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Memory RAS Mode: Independent mode
 VT-x : Disabled
 Processor C6 Report : Disabled
 OS Performance Tuning : Disabled
 Energy Performance : Performance
 Patrol Scrub : Disabled
 Demand Scrub : Disabled
 Memory P.E. Retry : Disabled

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/SmartHeap_10mc/lib:/opt/SmartHeap_10mc/lib64:/opt/intel/compiler/lib/ia32_lin:/opt/intel/compiler/lib/ia32_lin:/opt/intel/compiler/lib/intel64_lin"

Transparent Huge Pages enabled with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040d (Intel Xeon E7-4820 v4)

SPECint_rate2006 = 1360

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32  
401.bzip2: -D_FILE_OFFSET_BITS=64  
403.gcc: -D_FILE_OFFSET_BITS=64  
429.mcf: -D_FILE_OFFSET_BITS=64  
445.gobmk: -D_FILE_OFFSET_BITS=64  
456.hammer: -D_FILE_OFFSET_BITS=64  
458.sjeng: -D_FILE_OFFSET_BITS=64  
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX  
464.h264ref: -D_FILE_OFFSET_BITS=64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -D_FILE_OFFSET_BITS=64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/opt/SmartHeap_10mc/lib -lsmartheap
```

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 1360

Express5800/A2040d (Intel Xeon E7-4820 v4)

SPECint_rate_base2006 = 1290

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016.0.109/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/A2040d (Intel Xeon E7-4820 v4)

SPECint_rate2006 = 1360

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2016

Hardware Availability: Sep-2016

Software Availability: May-2016

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_10mc/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-V1.2-A2040d-RevA.html>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 1360

Express5800/A2040d (Intel Xeon E7-4820 v4)

SPECint_rate_base2006 = 1290

CPU2006 license: 9006

Test date: Sep-2016

Test sponsor: NEC Corporation

Hardware Availability: Sep-2016

Tested by: NEC Corporation

Software Availability: May-2016

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-platform-Settings-v1.2-A2040d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 19 10:28:57 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 October 2016.