



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint®2006 = 71.1

SPECint_base2006 = 69.2

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

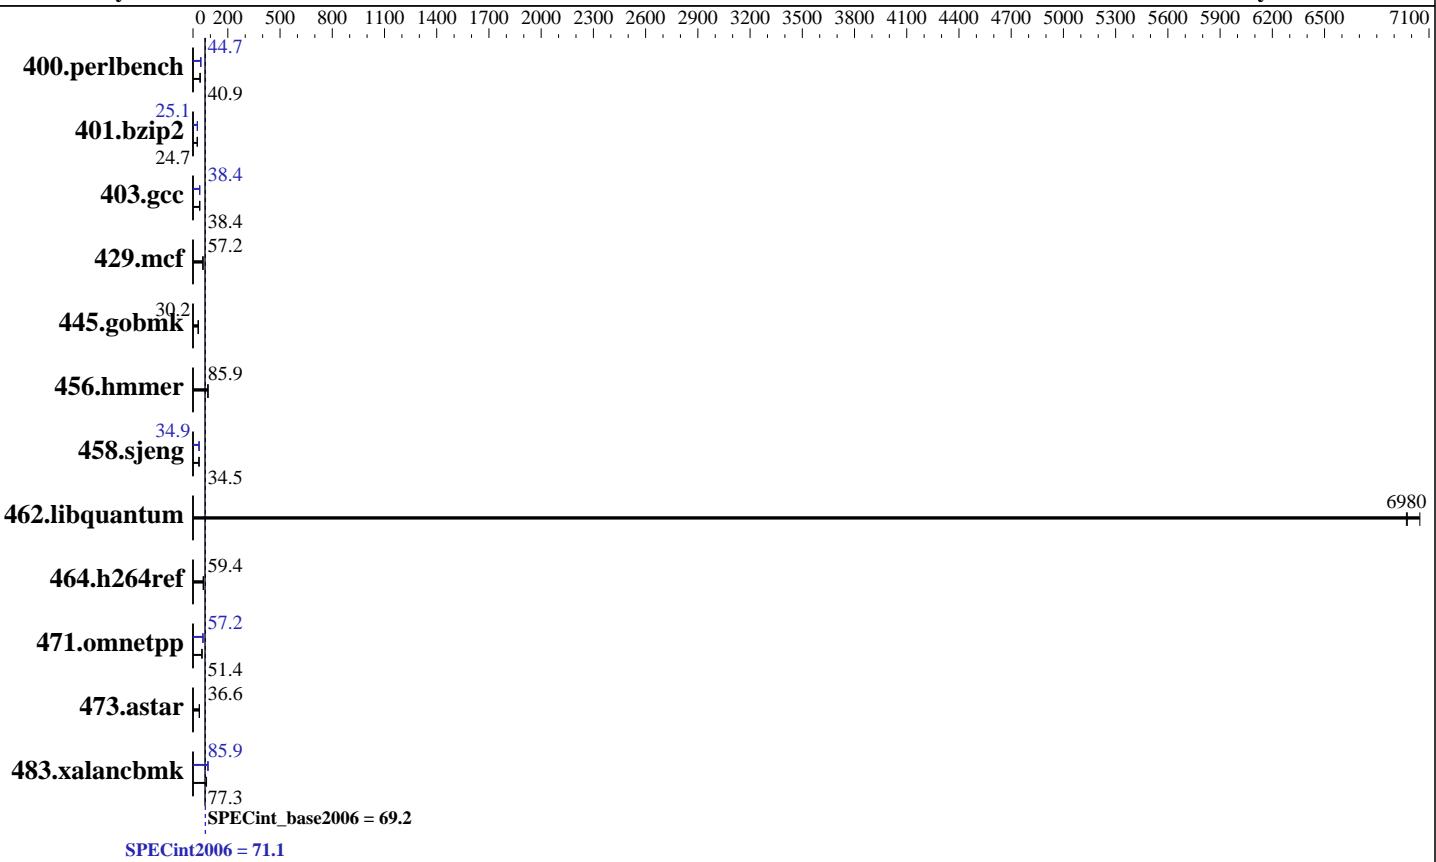

Hardware

CPU Name: Intel Xeon E7-8893 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
CPU(s) orderable: 2,4 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem: 1 x 800 GB NVMe PCIe SSD, RAID 0
Other Hardware: DL580 Gen9 NVMe SSD Express Bay Enablement Kit

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.49-11-default
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint2006 = 71.1

SPECint_base2006 = 69.2

CPU2006 license: 3

Test date: Jul-2016

Test sponsor: HPE

Hardware Availability: Jun-2016

Tested by: HPE

Software Availability: Dec-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	238	41.0	239	40.8	<u>239</u>	<u>40.9</u>	218	44.8	<u>219</u>	<u>44.7</u>	<u>218</u>	<u>44.7</u>
401.bzip2	391	24.7	<u>390</u>	<u>24.7</u>	390	24.8	<u>385</u>	<u>25.1</u>	385	25.1	384	25.1
403.gcc	210	38.4	<u>209</u>	<u>38.4</u>	209	38.5	<u>210</u>	<u>38.4</u>	<u>210</u>	<u>38.4</u>	209	38.5
429.mcf	159	57.4	<u>159</u>	<u>57.2</u>	161	56.7	<u>159</u>	<u>57.4</u>	<u>159</u>	<u>57.2</u>	161	56.7
445.gobmk	347	30.2	347	30.2	<u>347</u>	<u>30.2</u>	347	30.2	347	30.2	<u>347</u>	<u>30.2</u>
456.hmmer	109	85.9	<u>109</u>	<u>85.9</u>	109	85.8	109	85.9	<u>109</u>	<u>85.9</u>	109	85.8
458.sjeng	351	34.5	<u>351</u>	<u>34.5</u>	350	34.5	347	34.9	347	34.8	<u>347</u>	<u>34.9</u>
462.libquantum	2.94	7050	<u>2.97</u>	<u>6980</u>	2.97	6970	2.94	7050	<u>2.97</u>	<u>6980</u>	2.97	6970
464.h264ref	<u>372</u>	<u>59.4</u>	373	59.4	372	59.5	<u>372</u>	<u>59.4</u>	373	59.4	372	59.5
471.omnetpp	122	51.2	121	51.8	<u>122</u>	<u>51.4</u>	109	57.4	<u>109</u>	<u>57.2</u>	109	57.1
473.astar	192	36.6	193	36.4	<u>192</u>	<u>36.6</u>	192	36.6	193	36.4	<u>192</u>	<u>36.6</u>
483.xalancbmk	<u>89.2</u>	<u>77.3</u>	89.3	77.2	88.6	77.9	<u>80.3</u>	<u>86.0</u>	80.4	85.8	<u>80.3</u>	<u>85.9</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6 State

Minimum Processor Idle Power Package C-State set to Package C6 (retention) State

Energy/Performance Bias set to Maximum Performance

QPI Snoop Configuration set to Home Snoop

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Intel Hyperthreading set to Disabled

Sysinfo program /home/intel_binary/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date::: 2014-06-25 ## e3ffb8667b5a285932ceab81e28219e1
running on linux-vi0i Mon Jul 11 14:38:46 2016

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint2006 =

71.1

SPECint_base2006 =

69.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8893 v4 @ 3.20GHz
        4 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 4
physical 0: cores 12 13 25 26
physical 1: cores 12 13 25 26
physical 2: cores 12 13 25 26
physical 3: cores 12 13 25 26
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      529324312 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-vi0i 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 11 14:01
```

```
SPEC is set to: /home/intel_binary/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/nvme0nlp4  xfs   703G  91G  613G  13%  /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint2006 =

71.1

SPECint_base2006 =

69.2

CPU2006 license: 3

Test date: Jul-2016

Test sponsor: HPE

Hardware Availability: Jun-2016

Tested by: HPE

Software Availability: Dec-2015

Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 05/16/2016

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of

memory is 512 GB and the dmidecode description should have one line reading as:

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

LD_LIBRARY_PATH = "/home/intel_binary/cpu2006/libs/32:/home/intel_binary/cpu2006/libs/64:/home/intel_binary/cpu2006/sh"

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint2006 =

71.1

SPECint_base2006 =

69.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint2006 = 71.1

SPECint_base2006 = 69.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
               -ansi-alias
```

```
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div
            -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
            -opt-prefetch -ansi-alias
```

```
403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -opt-malloc-options=3 -auto-ilp32
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: basepeak = yes
```

```
456.hammer: basepeak = yes
```

```
458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2)
              -opt-ra-region-strategy=block           -ansi-alias
              -Wl,-z,muldefs -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
                  -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL580 Gen9
(3.20 GHz, Intel Xeon E7-8893 v4)

SPECint2006 = 71.1

SPECint_base2006 = 69.2

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jul-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 19 10:29:16 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 October 2016.