



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.00 GHz, Intel Xeon E7-4830 v4)

**SPECint®2006 =**

**54.5**

**SPECint\_base2006 =**

**51.8**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Aug-2016

Software Availability: Dec-2015

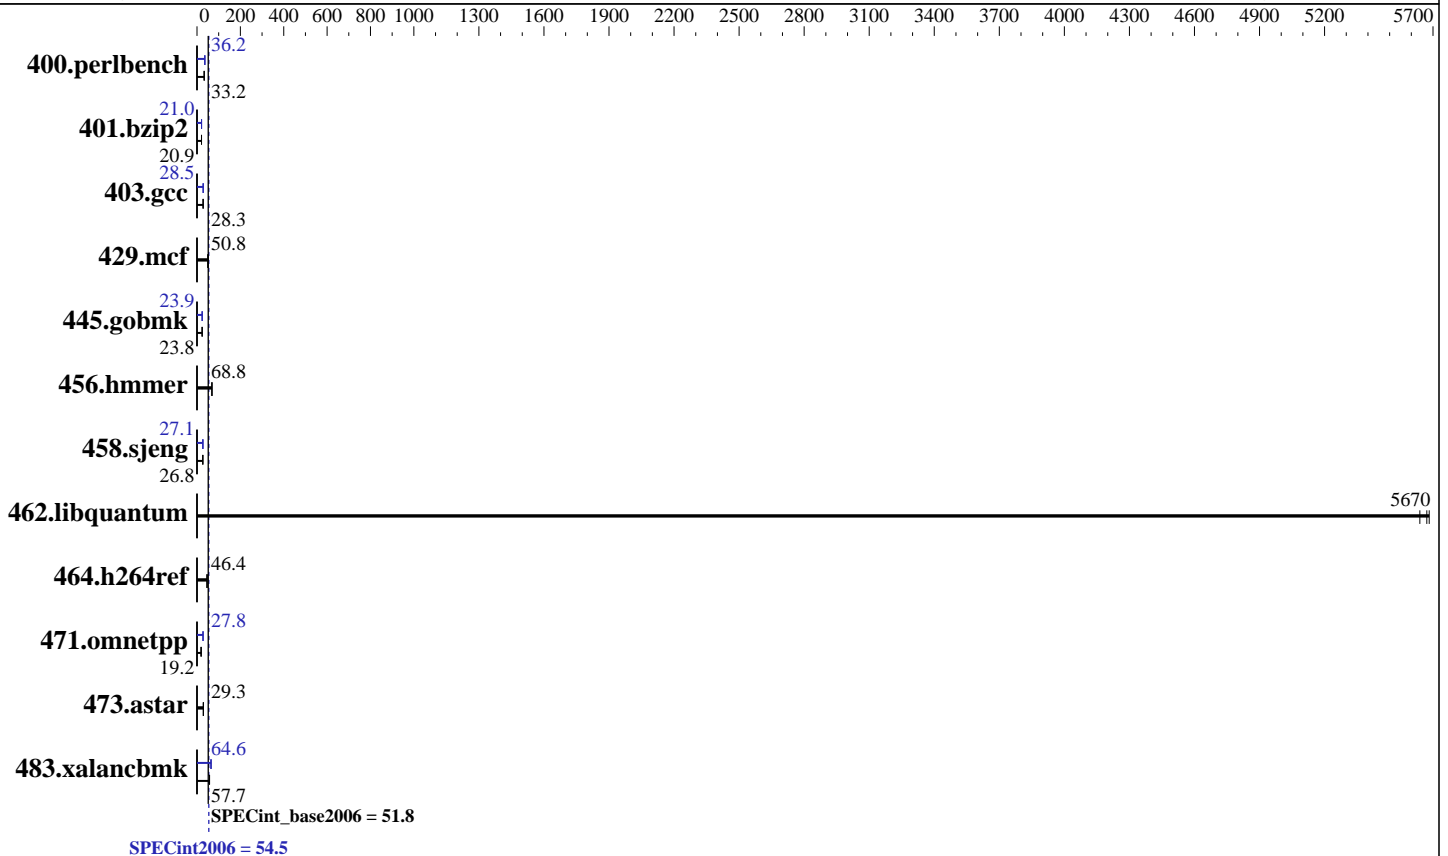

## Hardware

CPU Name: Intel Xeon E7-4830 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 4 chips, 14 cores/chip  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 35 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1333 MHz)  
 Disk Subsystem: 1 x 800 GB NVMe PCIe SSD, RAID 0  
 Other Hardware: DL580 Gen9 NVMe SSD Express Bay Enablement Kit

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.00 GHz, Intel Xeon E7-4830 v4)

SPECint2006 = 54.5

SPECint\_base2006 = 51.8

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Aug-2016

Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>294</u>	<u>33.2</u>	294	33.2	295	33.2	<u>270</u>	<u>36.2</u>	270	36.2	271	36.0
401.bzip2	<u>463</u>	<u>20.9</u>	462	20.9	466	20.7	459	21.0	459	21.0	<u>459</u>	<u>21.0</u>
403.gcc	285	28.3	<u>284</u>	<u>28.3</u>	284	28.4	<u>282</u>	<u>28.5</u>	283	28.5	282	28.6
429.mcf	179	50.9	181	50.3	<u>179</u>	<u>50.8</u>	179	50.9	181	50.3	<u>179</u>	<u>50.8</u>
445.gobmk	442	23.8	<u>441</u>	<u>23.8</u>	441	23.8	440	23.8	439	23.9	<u>439</u>	<u>23.9</u>
456.hammer	<u>136</u>	<u>68.8</u>	135	68.9	136	68.8	<u>136</u>	<u>68.8</u>	135	68.9	136	68.8
458.sjeng	<u>451</u>	<u>26.8</u>	451	26.8	451	26.9	446	27.1	447	27.1	<u>446</u>	<u>27.1</u>
462.libquantum	3.65	5680	3.67	5640	<u>3.65</u>	<u>5670</u>	3.65	5680	3.67	5640	<u>3.65</u>	<u>5670</u>
464.h264ref	476	46.5	478	46.3	<u>477</u>	<u>46.4</u>	476	46.5	478	46.3	<u>477</u>	<u>46.4</u>
471.omnetpp	337	18.5	323	19.3	<u>326</u>	<u>19.2</u>	224	27.9	<u>225</u>	<u>27.8</u>	225	27.8
473.astar	240	29.3	238	29.4	<u>239</u>	<u>29.3</u>	240	29.3	238	29.4	<u>239</u>	<u>29.3</u>
483.xalancbmk	120	57.7	<u>120</u>	<u>57.7</u>	119	58.0	107	64.8	107	64.6	<u>107</u>	<u>64.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

BIOS Configuration:

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6 State

Minimum Processor Idle Power Package C-State set to Package C6 (retention) State

Energy/Performance Bias set to Maximum Performance

QPI Snoop Configuration set to Home Snoop

Collaborative Power Control set to Disabled

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Intel Hyperthreading set to Disabled

Sysinfo program /home/intel\_binary/cpu2006/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-vi0i Tue Sep 20 15:53:07 2016

This section contains SUT (System Under Test) info as seen by

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4830 v4)

SPECint2006 = 54.5

SPECint\_base2006 = 51.8

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Aug-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4830 v4 @ 2.00GHz

4 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 14

physical 0: cores 0 2 4 5 6 8 9 10 11 12 13 14

physical 1: cores 0 2 4 5 6 8 9 10 11 12 13 14

physical 2: cores 0 2 4 5 6 8 9 10 11 12 13 14

physical 3: cores 0 2 4 5 6 8 9 10 11 12 13 14

cache size : 17920 KB

From /proc/meminfo

MemTotal: 529318644 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux linux-vi0i 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015  
(8d714a0) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Sep 20 15:01

SPEC is set to: /home/intel\_binary/cpu2006

Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0nlp4 xfs 703G 136G 568G 20% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4830 v4)

SPECint2006 = 54.5

SPECint\_base2006 = 51.8

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Aug-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 08/06/2016

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1333 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1333 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/intel\_binary/cpu2006/libs/32:/home/intel\_binary/cpu2006/libs/64:/home/intel\_binary/cpu2006/sh"

KMP\_AFFINITY = "granularity=fine,compact"

OMP\_NUM\_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

445.gobmk: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

471.omnetpp: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalanbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.00 GHz, Intel Xeon E7-4830 v4)

SPECint2006 = 54.5

SPECint\_base2006 = 51.8

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Sep-2016

Hardware Availability: Aug-2016

Software Availability: Dec-2015

## Base Optimization Flags

C benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

`445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

`473.astar: icpc -m64`

## Peak Portability Flags

`400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`

`401.bzip2: -DSPEC_CPU_LP64`

`403.gcc: -DSPEC_CPU_LP64`

`429.mcf: -DSPEC_CPU_LP64`

`445.gobmk: -D_FILE_OFFSET_BITS=64`

`456.hmmmer: -DSPEC_CPU_LP64`

`458.sjeng: -DSPEC_CPU_LP64`

`462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

`464.h264ref: -DSPEC_CPU_LP64`

`471.omnetpp: -D_FILE_OFFSET_BITS=64`

`473.astar: -DSPEC_CPU_LP64`

`483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen9**

(2.00 GHz, Intel Xeon E7-4830 v4)

**SPECint2006 =**

**54.5**

**SPECint\_base2006 =**

**51.8**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: basepeak = yes

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen9**

(2.00 GHz, Intel Xeon E7-4830 v4)

**SPECint2006 =**

**54.5**

**SPECint\_base2006 =**

**51.8**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Sep-2016

**Hardware Availability:** Aug-2016

**Software Availability:** Dec-2015

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 19 10:29:17 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 October 2016.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7