



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp®\_rate2006 = 3950

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046


Test date: Nov-2016

Test sponsor: Sugon

Hardware Availability: Jun-2016

Tested by: Sugon

Software Availability: Sep-2016

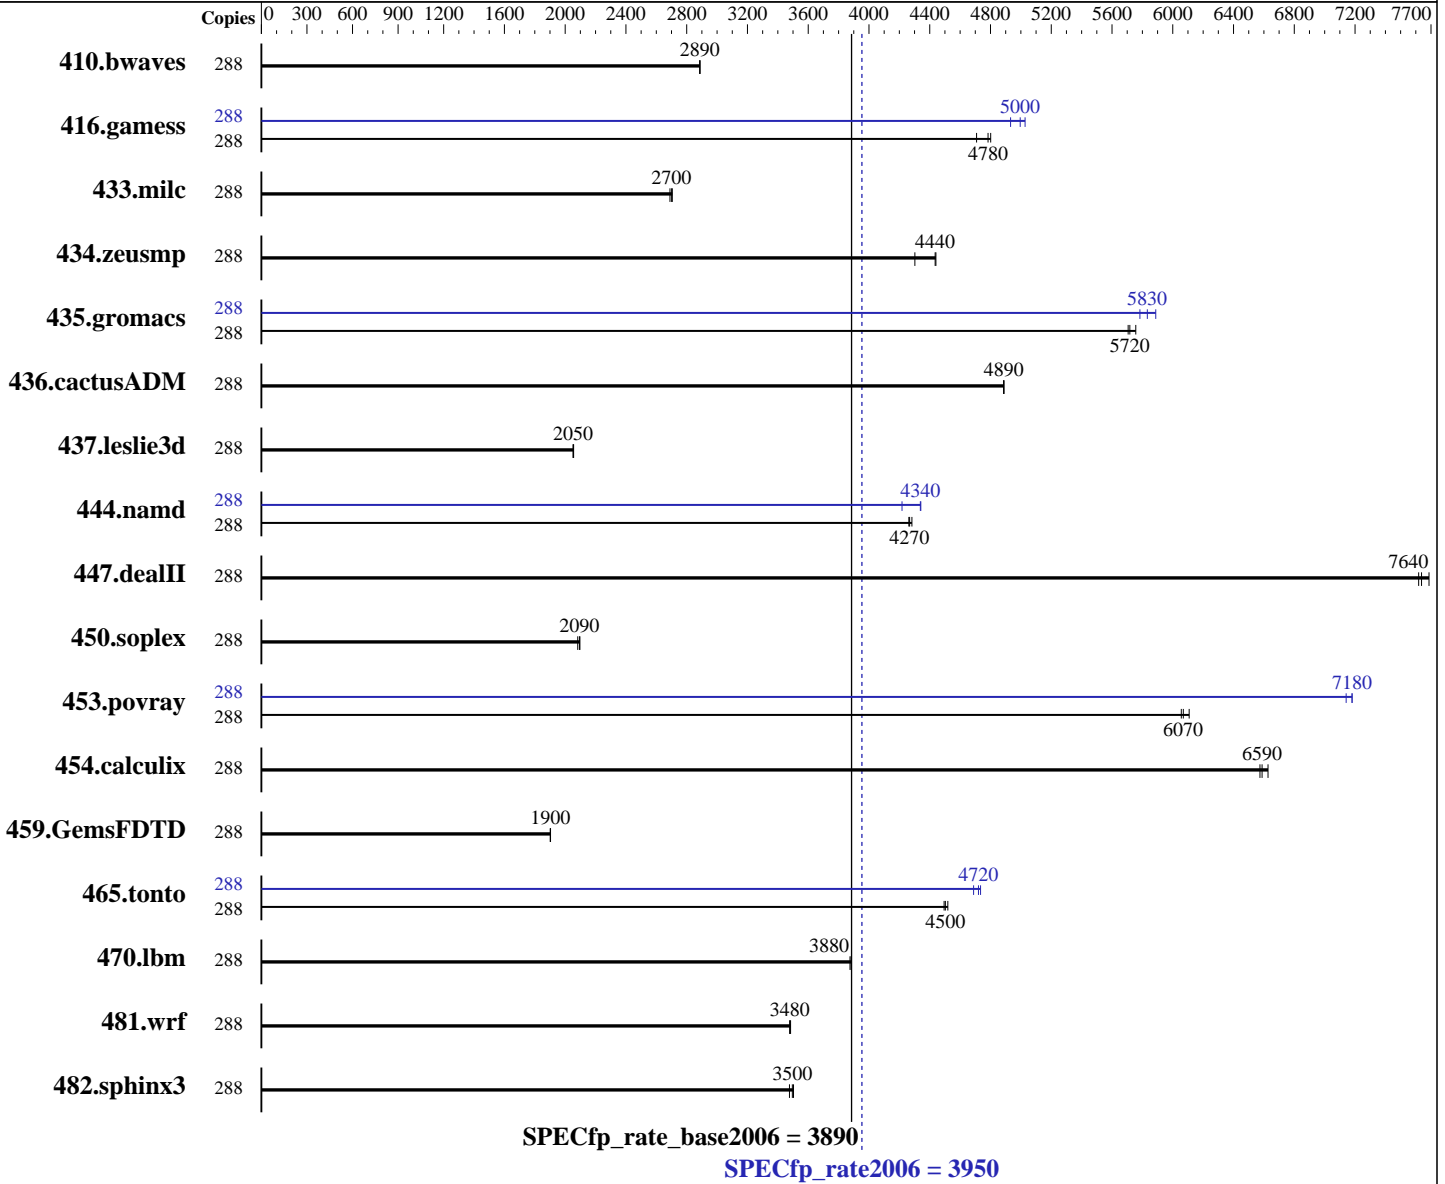

### Hardware

CPU Name: Intel Xeon E7-8890 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 144 cores, 8 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4,8 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 5 (multi-user with GUI)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 3950

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2016

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
Disk Subsystem: 1x2.0 TB SAS 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	288	1356	2890	<b>1356</b>	<b>2890</b>	1356	2890	288	1356	2890	<b>1356</b>	<b>2890</b>	1356	2890
416.gamess	288	<b>1179</b>	<b>4780</b>	1198	4710	1174	4800	288	1143	4930	<b>1129</b>	<b>5000</b>	1122	5030
433.milc	288	983	2690	<b>979</b>	<b>2700</b>	977	2710	288	983	2690	<b>979</b>	<b>2700</b>	977	2710
434.zeusmp	288	609	4300	<b>591</b>	<b>4440</b>	590	4440	288	609	4300	<b>591</b>	<b>4440</b>	590	4440
435.gromacs	288	357	5760	360	5710	<b>360</b>	<b>5720</b>	288	356	5780	349	5890	<b>353</b>	<b>5830</b>
436.cactusADM	288	<b>704</b>	<b>4890</b>	704	4890	704	4890	288	<b>704</b>	<b>4890</b>	704	4890	704	4890
437.leslie3d	288	1317	2060	<b>1319</b>	<b>2050</b>	1319	2050	288	1317	2060	<b>1319</b>	<b>2050</b>	1319	2050
444.namd	288	542	4260	<b>541</b>	<b>4270</b>	539	4280	288	<b>532</b>	<b>4340</b>	532	4340	548	4220
447.dealII	288	432	7620	<b>431</b>	<b>7640</b>	429	7690	288	432	7620	<b>431</b>	<b>7640</b>	429	7690
450.soplex	288	1153	2080	<b>1147</b>	<b>2090</b>	1145	2100	288	1153	2080	<b>1147</b>	<b>2090</b>	1145	2100
453.povray	288	<b>252</b>	<b>6070</b>	253	6060	251	6110	288	215	7140	<b>213</b>	<b>7180</b>	213	7180
454.calculix	288	359	6630	<b>361</b>	<b>6590</b>	361	6570	288	359	6630	<b>361</b>	<b>6590</b>	361	6570
459.GemsFDTD	288	1607	1900	<b>1606</b>	<b>1900</b>	1605	1900	288	1607	1900	<b>1606</b>	<b>1900</b>	1605	1900
465.tonto	288	631	4490	627	4520	<b>629</b>	<b>4500</b>	288	<b>600</b>	<b>4720</b>	604	4690	599	4730
470.lbm	288	1019	3880	1021	3870	<b>1019</b>	<b>3880</b>	288	1019	3880	1021	3870	<b>1019</b>	<b>3880</b>
481.wrf	288	<b>925</b>	<b>3480</b>	925	3480	923	3480	288	<b>925</b>	<b>3480</b>	925	3480	923	3480
482.sphinx3	288	1615	3480	1602	3500	<b>1606</b>	<b>3500</b>	288	1615	3480	1602	3500	<b>1606</b>	<b>3500</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

fans are set to be running at full speed  
BIOS Configuration:  
Energy Performance BIAS setting. is set as Performance  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 3950

### Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Platform Notes (Continued)

Sysinfo program /benchmarks/cpu2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-2u6u Sat Nov 19 17:36:11 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz
 8 "physical id"s (chips)
288 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 18
siblings : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

From /proc/meminfo

```
MemTotal: 2117881540 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 12 SP1
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 3950

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Platform Notes (Continued)

```
uname -a:
Linux linux-2u6u 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Nov 17 21:50
```

```
SPEC is set to: /benchmarks/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       ext4  1.8T  692G  1.1T   40% /benchmarks/cpu2006
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.60 10/12/2016

Memory:

128x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
64x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/benchmarks/cpu2006/libs/32:/benchmarks/cpu2006/libs/64:/benchmarks/cpu2006/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 3950

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Sugon

SPECfp\_rate2006 = 3950

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
          -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -fno-alias -auto-ilp32
          -qopt-mem-layout-trans=3
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sugon

SPECfp\_rate2006 = 3950

Sugon I980-G20 (Intel Xeon E7-8890 v3)

SPECfp\_rate\_base2006 = 3890

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Nov-2016

Hardware Availability: Jun-2016

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Dec 15 11:18:39 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 December 2016.