



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 4380**

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

**SPECint\_rate\_base2006 = 4160**

CPU2006 license: 3175


**Test date:** Oct-2016

**Test sponsor:** Huawei

**Hardware Availability:** Jun-2016

**Tested by:** Huawei

**Software Availability:** Nov-2015

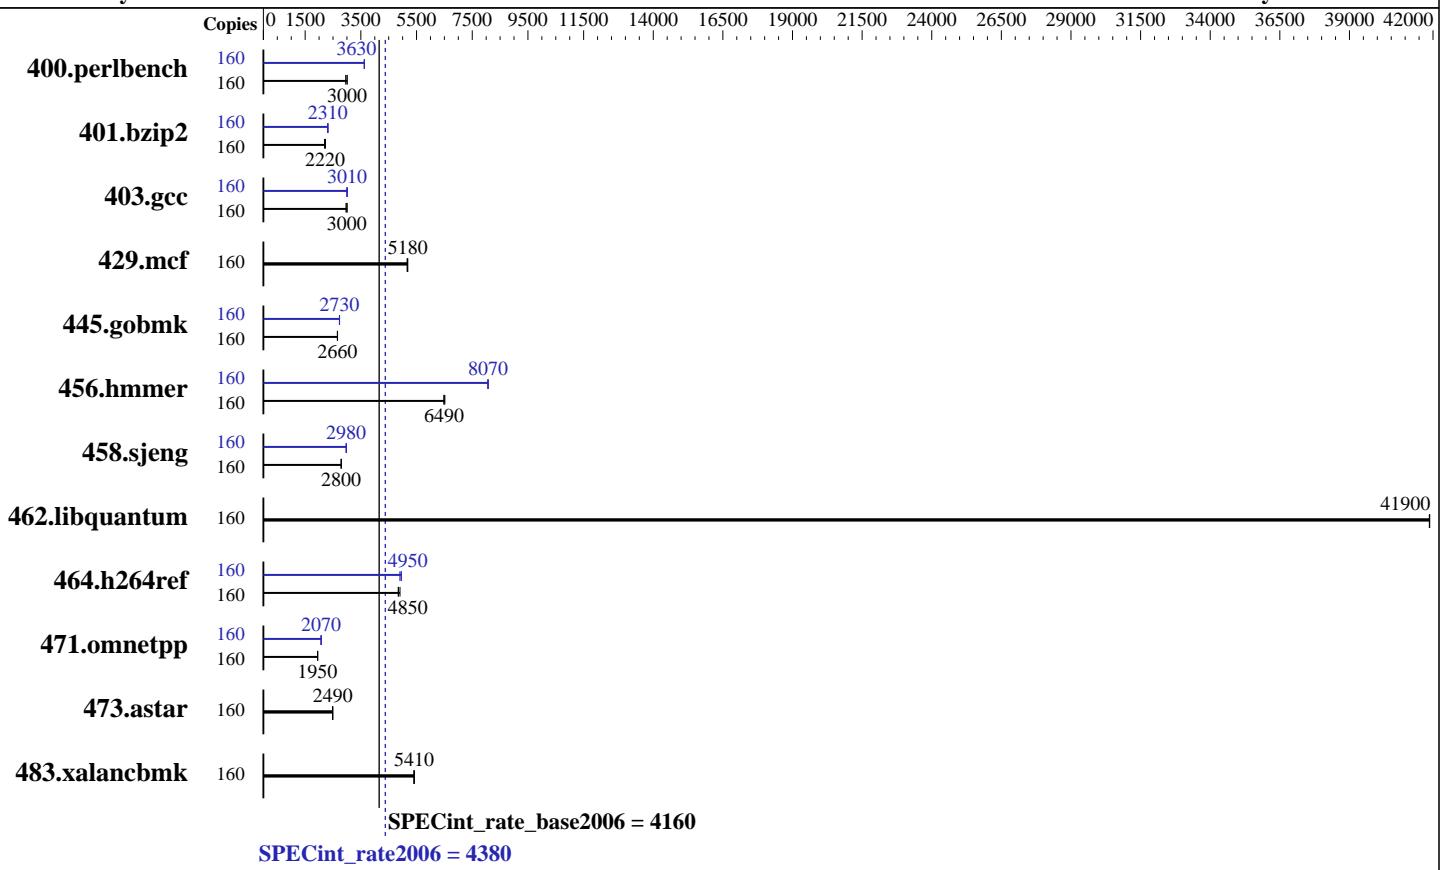

## Hardware

CPU Name: Intel Xeon E7-8891 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 80 cores, 8 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4,6,8 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 60 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: 3.10.0-327.el7.x86\_64  
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 4380**

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

**SPECint\_rate\_base2006 = 4160**

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	160	529	2950	520	3010	<b>521</b>	<b>3000</b>	160	431	3630	<b>431</b>	<b>3630</b>	431	3620
401.bzip2	160	703	2200	<b>694</b>	<b>2220</b>	694	2230	160	667	2310	666	2320	<b>667</b>	<b>2310</b>
403.gcc	160	434	2970	<b>430</b>	<b>3000</b>	428	3010	160	428	3010	<b>428</b>	<b>3010</b>	430	3000
429.mcf	160	282	5180	283	5160	<b>282</b>	<b>5180</b>	160	282	5180	283	5160	<b>282</b>	<b>5180</b>
445.gobmk	160	630	2660	632	2660	<b>631</b>	<b>2660</b>	160	<b>614</b>	<b>2730</b>	613	2740	614	2730
456.hammer	160	229	6520	230	6480	<b>230</b>	<b>6490</b>	160	<b>185</b>	<b>8070</b>	185	8080	185	8060
458.sjeng	160	694	2790	692	2800	<b>692</b>	<b>2800</b>	160	651	2970	<b>650</b>	<b>2980</b>	650	2980
462.libquantum	160	79.2	41900	<b>79.2</b>	<b>41900</b>	79.2	41900	160	79.2	41900	<b>79.2</b>	<b>41900</b>	79.2	41900
464.h264ref	160	722	4910	<b>730</b>	<b>4850</b>	731	4840	160	722	4900	715	4950	<b>716</b>	<b>4950</b>
471.omnetpp	160	<b>513</b>	<b>1950</b>	513	1950	514	1950	160	483	2070	<b>482</b>	<b>2070</b>	482	2080
473.astar	160	<b>451</b>	<b>2490</b>	452	2480	451	2490	160	<b>451</b>	<b>2490</b>	452	2480	451	2490
483.xalancbmk	160	204	5420	204	5410	<b>204</b>	<b>5410</b>	160	204	5420	204	5410	<b>204</b>	<b>5410</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Turbo mode set with:  
cpupower -c all frequency-set -g performance

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Lock\_step to disabled  
Baseboard Management Controller used to adjust the fan speed to 100%  
Set C-State to C0/C1  
Sysinfo program /home/spec/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on RH8100V3 Thu Oct 20 17:05:29 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8891 v4 @ 2.80GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 4380

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

SPECint\_rate\_base2006 = 4160

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

## Platform Notes (Continued)

```
8 "physical id"s (chips)
160 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 5 9 10 11 13 18 24 26 28 29
physical 1: cores 5 9 10 11 13 18 24 26 28 29
physical 2: cores 5 9 10 11 13 18 24 26 28 29
physical 3: cores 5 9 10 11 13 18 24 26 28 29
physical 4: cores 5 9 10 11 13 18 24 26 28 29
physical 5: cores 5 9 10 11 13 18 24 26 28 29
physical 6: cores 5 9 10 11 13 18 24 26 28 29
physical 7: cores 5 9 10 11 13 18 24 26 28 29
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      1056511312 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.2 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.2"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux RH8100V3 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 20 15:59
```

```
SPEC is set to: /home/spec
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   466G  8.0G  458G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 4380**

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

**SPECint\_rate\_base2006 = 4160**

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

## Platform Notes (Continued)

BIOS American Megatrends Inc. 5.11 02/05/2016

Memory:

128x NO DIMM NO DIMM

64x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 4380**

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

**SPECint\_rate\_base2006 = 4160**

CPU2006 license: 3175

Test date: Oct-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Nov-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmr: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmr: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint\_rate2006 = 4380

SPECint\_rate\_base2006 = 4160

Test date: Oct-2016

Hardware Availability: Jun-2016

Software Availability: Nov-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

Huawei RH8100 V3 (Intel Xeon E7-8891 v4)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECint\_rate2006 = 4380**

**SPECint\_rate\_base2006 = 4160**

**Test date:** Oct-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Nov-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 28 10:50:48 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 December 2016.