



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

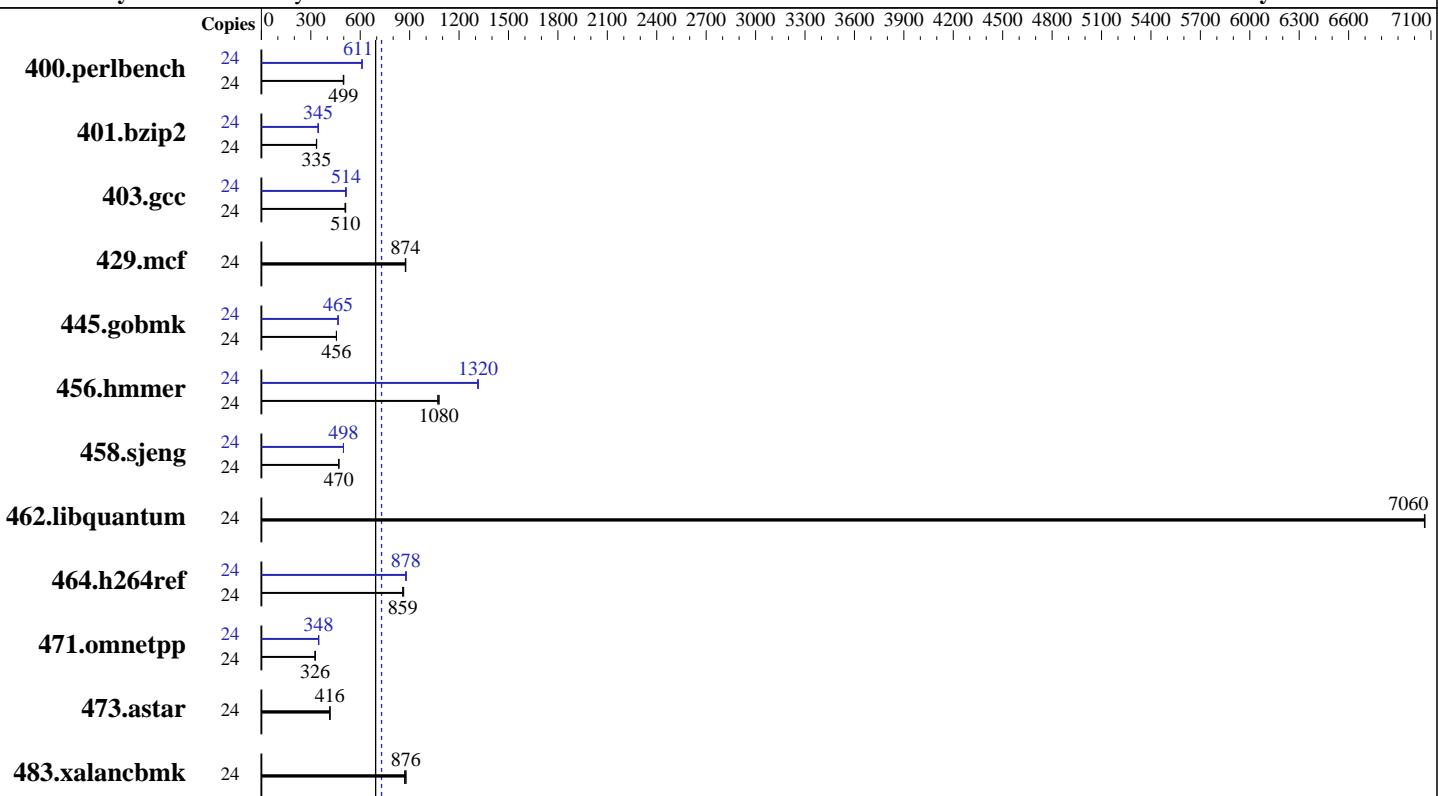

### Hardware

|                      |   |
|----------------------|---|
| CPU Name:            | Intel Xeon E5-2643 v4                           |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.70 GHz     |
| CPU MHz:             | 3400  |
| FPU:                 | Integrated                                      |
| CPU(s) enabled:      | 12 cores, 2 chips, 6 cores/chip, 2 threads/core |
| CPU(s) orderable:    | 1,2 chips                                       |
| Primary Cache:       | 32 KB I + 32 KB D on chip per core              |
| Secondary Cache:     | 256 KB I+D on chip per core                     |
| L3 Cache:            | 20 MB I+D on chip per chip                      |
| Other Cache:         | None  |
| Memory:              | 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)            |
| Disk Subsystem:      | 1 x 1.2 TB SAS HDD, 10K RPM                     |
| Other Hardware:      | None  |

### Software

|                   |   |
|-------------------|---|
| Operating System: | SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default |
| Compiler:         | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux      |
| Auto Parallel:    | No  |
| File System:      | xfs   |
| System State:     | Run level 5 (multi-user)  |
| Base Pointers:    | 32-bit  |
| Peak Pointers:    | 32/64-bit   |
| Other Software:   | Microquill SmartHeap V10.2                                      |



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019

**Test date:** Nov-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Results Table

| Benchmark      | Base   |             |             |            |            |            |            | Peak   |             |             |            |            |            |             |
|----------------|--------|-------------|-------------|------------|------------|------------|------------|--------|-------------|-------------|------------|------------|------------|-------------|
|                | Copies | Seconds     | Ratio       | Seconds    | Ratio      | Seconds    | Ratio      | Copies | Seconds     | Ratio       | Seconds    | Ratio      | Seconds    | Ratio       |
| 400.perlbench  | 24     | <b>470</b>  | <b>499</b>  | 472        | 497        | 469        | 500        | 24     | 383         | 611         | <b>384</b> | <b>611</b> | 384        | 610         |
| 401.bzip2      | 24     | 693         | 334         | 691        | 335        | <b>691</b> | <b>335</b> | 24     | 671         | 345         | <b>672</b> | <b>345</b> | 673        | 344         |
| 403.gcc        | 24     | <b>379</b>  | <b>510</b>  | 377        | 512        | 380        | 508        | 24     | 378         | 511         | <b>376</b> | <b>514</b> | 375        | 515         |
| 429.mcf        | 24     | 250         | 874         | <b>250</b> | <b>874</b> | 250        | 877        | 24     | 250         | 874         | <b>250</b> | <b>874</b> | 250        | 877         |
| 445.gobmk      | 24     | <b>553</b>  | <b>456</b>  | 552        | 456        | 553        | 455        | 24     | 541         | 466         | <b>541</b> | <b>465</b> | 541        | 465         |
| 456.hammer     | 24     | <b>208</b>  | <b>1080</b> | 209        | 1070       | 208        | 1080       | 24     | 171         | 1310        | 170        | 1320       | <b>170</b> | <b>1320</b> |
| 458.sjeng      | 24     | 618         | 470         | <b>618</b> | <b>470</b> | 618        | 470        | 24     | 583         | 498         | <b>583</b> | <b>498</b> | 583        | 498         |
| 462.libquantum | 24     | <b>70.4</b> | <b>7060</b> | 70.4       | 7060       | 70.4       | 7060       | 24     | <b>70.4</b> | <b>7060</b> | 70.4       | 7060       | 70.4       | 7060        |
| 464.h264ref    | 24     | <b>618</b>  | <b>859</b>  | 619        | 858        | 615        | 864        | 24     | <b>605</b>  | <b>878</b>  | 606        | 876        | 604        | 880         |
| 471.omnetpp    | 24     | 459         | 327         | 460        | 326        | <b>460</b> | <b>326</b> | 24     | 432         | 347         | 431        | 348        | <b>431</b> | <b>348</b>  |
| 473.astar      | 24     | <b>405</b>  | <b>416</b>  | 405        | 416        | 405        | 416        | 24     | <b>405</b>  | <b>416</b>  | 405        | 416        | 405        | 416         |
| 483.xalancbmk  | 24     | 189         | 878         | <b>189</b> | <b>876</b> | 191        | 869        | 24     | 189         | 878         | <b>189</b> | <b>876</b> | 191        | 869         |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

CPU performance set to Enterprise

Power Technology set to Performance

Energy Performance BIAS setting set to Balanced Performance

Memory RAS configuration set to Maximum Performance

Memory Power Saving Mode set to Disabled

QPI Snoop Mode set to Cluster-on-Die

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-cd5x Tue Nov 15 06:05:33 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2643 v4 @ 3.40GHz

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019

**Test date:** Nov-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Platform Notes (Continued)

```
2 "physical id"s (chips)
24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 12
    physical 0: cores 0 1 2 3 6 7
    physical 1: cores 0 1 2 3 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      264568724 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
Linux linux-cd5x 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Nov 15 05:27

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   1.1T   34G  1.1T   4% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Platform Notes (Continued)

BIOS Cisco Systems, Inc. C240M4.2.0.13d.0.0812161132 08/12/2016

Memory:

16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2016

**Hardware Availability:** Apr-2016

**Software Availability:** Dec-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M4 (Intel Xeon E5-2643 v4 3.40 GHz)

**SPECint\_rate2006 = 729**

**SPECint\_rate\_base2006 = 694**

**CPU2006 license:** 9019

**Test date:** Nov-2016

**Test sponsor:** Cisco Systems

**Hardware Availability:** Apr-2016

**Tested by:** Cisco Systems

**Software Availability:** Dec-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 28 10:50:44 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 December 2016.