



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Inspur Corporation

SPECint®\_rate2006 = 3710

### Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358


Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Mar-2016

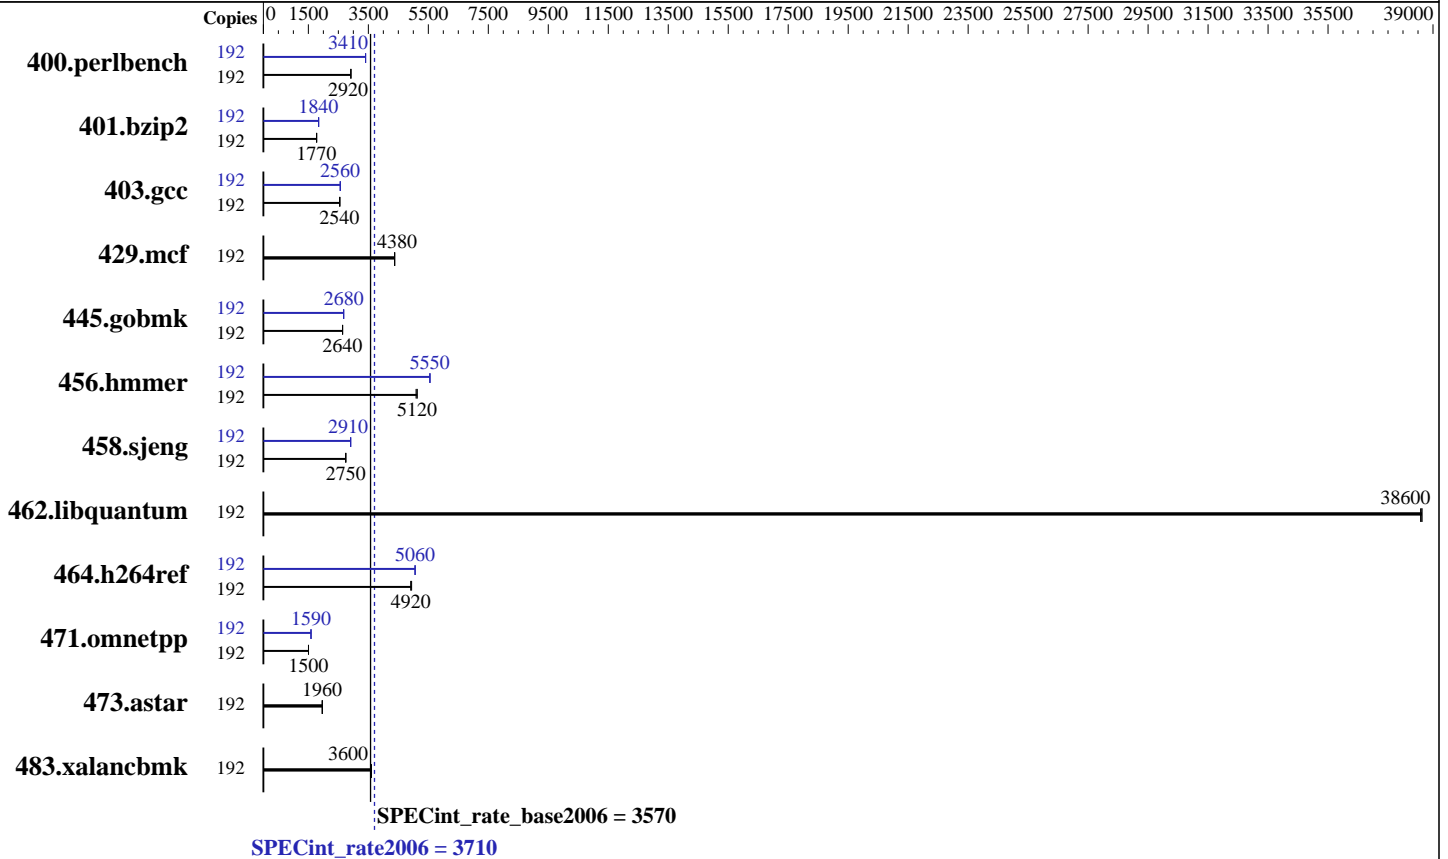

### Hardware

CPU Name: Intel Xeon E7-8890 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 60 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 1 x 600 GB SATA SSD  
 Other Hardware: None

### Software

Operating System: Inspur K-UX release 3.0.5 (Inspur) 3.10.4-K\_UX.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 3710

Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Mar-2016

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	<b>643</b>	<b>2920</b>	643	2920	643	2920	192	551	3410	550	3410	<b>550</b>	<b>3410</b>
401.bzip2	192	1043	1780	1044	1770	<b>1044</b>	<b>1770</b>	192	1007	1840	1004	1850	<b>1006</b>	<b>1840</b>
403.gcc	192	<b>608</b>	<b>2540</b>	605	2550	608	2540	192	604	2560	<b>603</b>	<b>2560</b>	601	2570
429.mcf	192	400	4370	<b>400</b>	<b>4380</b>	400	4380	192	400	4370	<b>400</b>	<b>4380</b>	400	4380
445.gobmk	192	<b>763</b>	<b>2640</b>	762	2640	763	2640	192	752	2680	753	2670	<b>752</b>	<b>2680</b>
456.hammer	192	349	5130	352	5090	<b>350</b>	<b>5120</b>	192	323	5550	323	5550	<b>323</b>	<b>5550</b>
458.sjeng	192	<b>846</b>	<b>2750</b>	845	2750	846	2750	192	<b>798</b>	<b>2910</b>	799	2910	798	2910
462.libquantum	192	103	38600	103	38600	<b>103</b>	<b>38600</b>	192	103	38600	103	38600	<b>103</b>	<b>38600</b>
464.h264ref	192	<b>864</b>	<b>4920</b>	860	4940	864	4920	192	<b>840</b>	<b>5060</b>	840	5060	840	5060
471.omnetpp	192	798	1500	<b>798</b>	<b>1500</b>	797	1500	192	756	1590	755	1590	<b>756</b>	<b>1590</b>
473.astar	192	<b>686</b>	<b>1960</b>	686	1960	686	1970	192	<b>686</b>	<b>1960</b>	686	1960	686	1970
483.xalancbmk	192	368	3600	368	3600	<b>368</b>	<b>3600</b>	192	368	3600	368	3600	<b>368</b>	<b>3600</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS and OS configuration:  
SCALING\_GOVNOR set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable  
C1E Support set to Disable  
Sysinfo program /home/CPU2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on localhost.localdomain Mon Nov 21 23:39:05 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz  
4 "physical id"s (chips)  
192 "processors"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 3710

Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 24
siblings  : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29

```

cache size : 30720 KB

From /proc/meminfo

```

MemTotal:      528261344 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

inspur-release: Inspur K-UX release 3.0.5 (Inspur)
os-release:
NAME="Inspur K-UX"
VERSION="3 (Inspur)"
ID="k-ux"
VERSION_ID="3"
PRETTY_NAME="Inspur K-UX 3 (Inspur)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:k-ux:k-ux:3"
HOME_URL="http://www.inspur.com/"
system-release: Inspur K-UX release 3.0.5 (Inspur)
system-release-cpe: cpe:/o:k-ux:k-ux:3

```

uname -a:

```

Linux localhost.localdomain 3.10.4-K_UX.x86_64 #1 SMP Fri Sep 30 11:06:29 GMT
2016 x86_64 x86_64 x86_64 GNU/Linux

```

SPEC is set to: /home/CPU2006

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/ik-home xfs  225G  171G   54G   77% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Inspur NF8480M4\_3.0.3 08/11/2016

Memory:

64x NO DIMM Unknown

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 3710

Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

## Platform Notes (Continued)

32x Samsung M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/CPU2006/libs/32:/home/CPU2006/libs/64:/home/CPU2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -D\_FILE\_OFFSET\_BITS=64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-qopt-mem-layout-trans=3
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 3710

Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Mar-2016

## Base Optimization Flags (Continued)

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 3710

Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358

Test date: Nov-2016

Test sponsor: Inspur Corporation

Hardware Availability: Apr-2016

Tested by: Inspur Corporation

Software Availability: Mar-2016

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Inspur Corporation

SPECint\_rate2006 = 3710

Inspur NF8480M4 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3570

CPU2006 license: 3358

Test sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Inspur-Platform-Settings-V1.0-HSW.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 28 10:51:56 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 December 2016.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7