



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

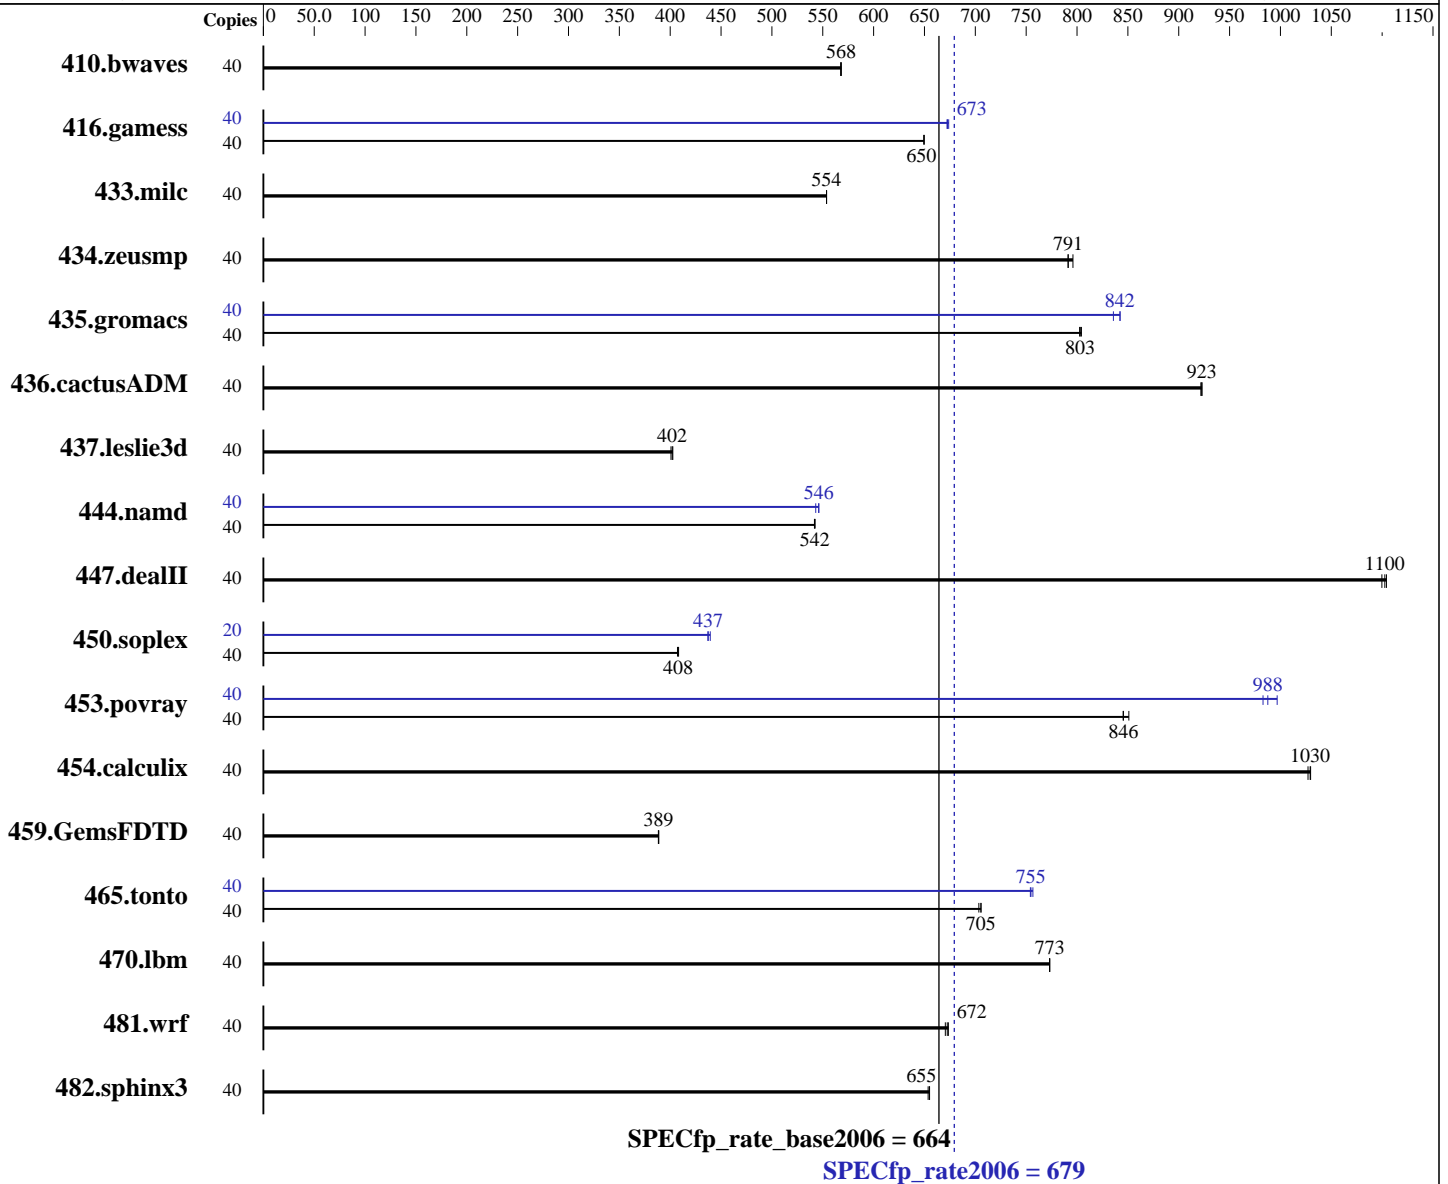

Hardware

CPU Name: Intel Xeon E5-2618L v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = **679**

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = **664**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem: 1 x 8000 GB SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	40	957	568	957	568	958	568	40	957	568	957	568	958	568		
416.gamess	40	1206	649	1206	650	1206	650	40	1162	674	1165	672	1164	673		
433.milc	40	663	554	663	554	663	554	40	663	554	663	554	663	554		
434.zeusmp	40	460	791	460	791	457	796	40	460	791	460	791	457	796		
435.gromacs	40	355	804	356	803	356	803	40	339	842	339	842	342	836		
436.cactusADM	40	519	922	518	923	518	923	40	519	922	518	923	518	923		
437.leslie3d	40	935	402	934	403	938	401	40	935	402	934	403	938	401		
444.namd	40	591	542	592	542	592	542	40	588	546	591	543	587	546		
447.dealII	40	415	1100	416	1100	414	1100	40	415	1100	416	1100	414	1100		
450.soplex	40	818	408	817	408	819	407	20	381	437	380	439	382	437		
453.povray	40	252	846	250	851	252	845	40	213	997	217	983	215	988		
454.calculix	40	321	1030	321	1030	320	1030	40	321	1030	321	1030	320	1030		
459.GemsFDTD	40	1092	389	1093	388	1092	389	40	1092	389	1093	388	1092	389		
465.tonto	40	558	705	558	706	560	703	40	520	757	522	755	522	754		
470.lbm	40	711	773	711	773	711	773	40	711	773	711	773	711	773		
481.wrf	40	666	671	663	673	664	672	40	666	671	663	673	664	672		
482.sphinx3	40	1190	655	1193	654	1190	655	40	1190	655	1193	654	1190	655		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Set Snoop Mode to ES mode
Set Patrol Scrub to Disable
Sysinfo program /spec/spec16/config/sysinfo.rev6914
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on linux-n8wl Sat Dec 3 12:15:35 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2618L v4 @ 2.20GHz

2 "physical id"s (chips)

40 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 10

siblings : 20

physical 0: cores 0 1 2 3 4 8 9 10 11 12

physical 1: cores 0 1 2 3 4 8 9 10 11 12

cache size : 25600 KB

From /proc/meminfo

MemTotal: 264054116 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux linux-n8wl 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015

(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 3 00:13

SPEC is set to: /spec/spec16

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda3 ext4 632G 65G 565G 11% /spec

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 3.31 08/22/2016

Memory:

16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/spec16/libs/32:/spec/spec16/libs/64:/spec/spec16/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Nov-2016

Tested by: Huawei

Software Availability: Dec-2015

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 679

Huawei XH321 V3(Intel Xeon E5-2618L v4)

SPECfp_rate_base2006 = 664

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Nov-2016

Software Availability: Dec-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 28 10:51:53 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 December 2016.