



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## HITACHI

SPECint®\_rate2006 = 6910

BladeSymphony BS2500 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 6660

CPU2006 license: 35


Test date: Dec-2016

Test sponsor: HITACHI

Hardware Availability: Sep-2016

Tested by: HITACHI

Software Availability: Mar-2016

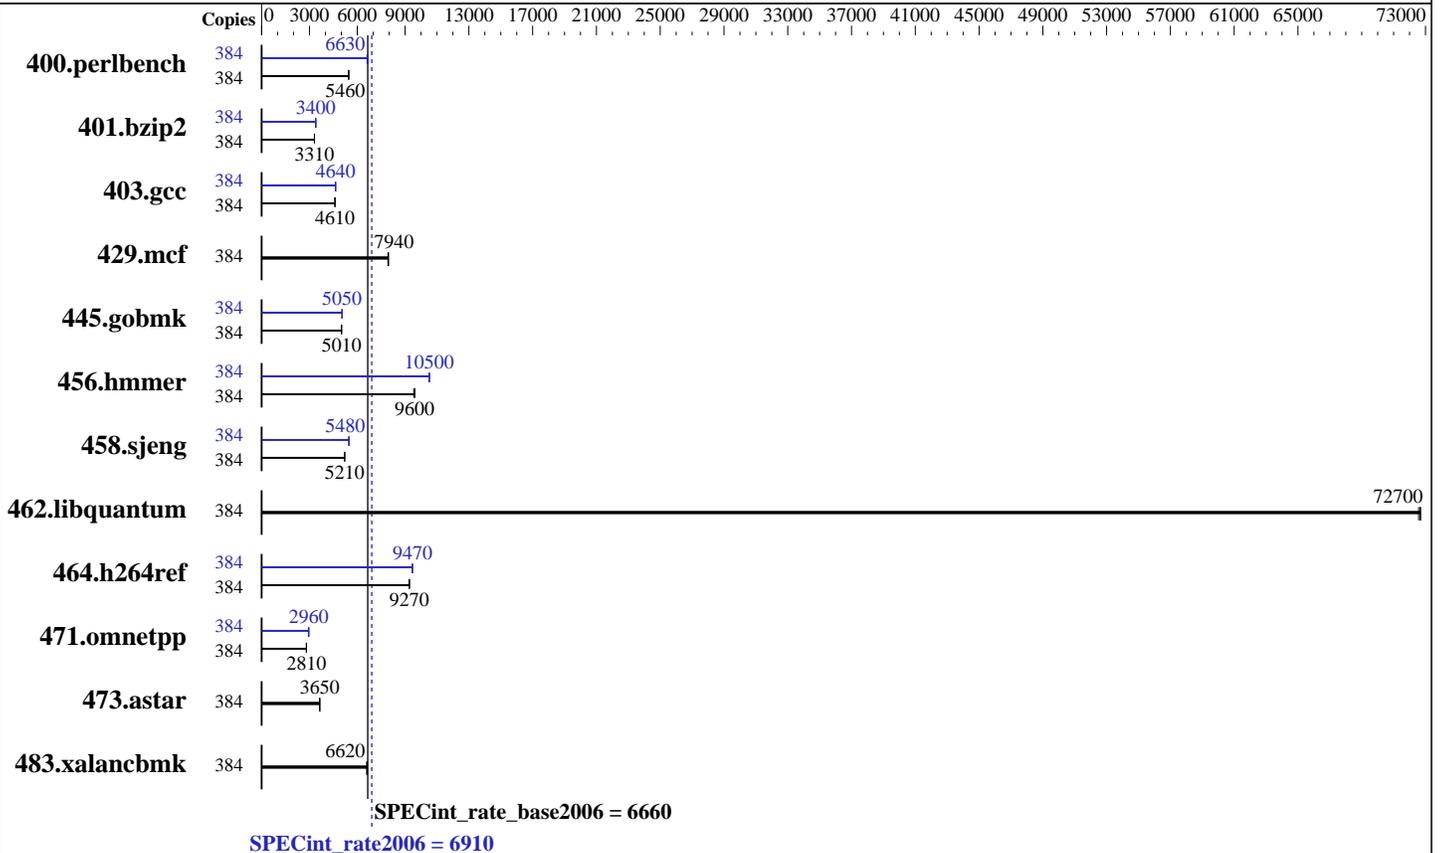

### Hardware

CPU Name: Intel Xeon E7-8890 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 192 cores, 8 chips, 24 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,3,4,8 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 60 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 15000 RPM, RAID1  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.el7.x86\_64  
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## HITACHI

SPECint\_rate2006 = 6910

BladeSymphony BS2500 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 6660

CPU2006 license: 35  
Test sponsor: HITACHI  
Tested by: HITACHI

Test date: Dec-2016  
Hardware Availability: Sep-2016  
Software Availability: Mar-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	384	<b>687</b>	<b>5460</b>	688	5450	685	5470	384	<b>565</b>	<b>6630</b>	563	6670	567	6610
401.bzip2	384	1118	3310	1119	3310	<b>1118</b>	<b>3310</b>	384	<b>1091</b>	<b>3400</b>	1088	3410	1094	3390
403.gcc	384	<b>671</b>	<b>4610</b>	671	4610	672	4600	384	669	4620	<b>666</b>	<b>4640</b>	664	4660
429.mcf	384	440	7960	442	7930	<b>441</b>	<b>7940</b>	384	440	7960	442	7930	<b>441</b>	<b>7940</b>
445.gobmk	384	803	5020	<b>803</b>	<b>5010</b>	805	5010	384	<b>798</b>	<b>5050</b>	798	5050	799	5040
456.hammer	384	<b>373</b>	<b>9600</b>	375	9540	373	9610	384	<b>341</b>	<b>10500</b>	340	10500	341	10500
458.sjeng	384	<b>892</b>	<b>5210</b>	892	5210	893	5200	384	848	5480	849	5470	<b>849</b>	<b>5480</b>
462.libquantum	384	109	72700	<b>109</b>	<b>72700</b>	110	72600	384	109	72700	<b>109</b>	<b>72700</b>	110	72600
464.h264ref	384	<b>917</b>	<b>9270</b>	918	9250	916	9270	384	898	9470	<b>898</b>	<b>9470</b>	900	9440
471.omnetpp	384	852	2820	856	2800	<b>855</b>	<b>2810</b>	384	818	2930	<b>811</b>	<b>2960</b>	809	2970
473.astar	384	<b>740</b>	<b>3650</b>	741	3640	738	3650	384	<b>740</b>	<b>3650</b>	741	3640	738	3650
483.xalancbmk	384	<b>400</b>	<b>6620</b>	400	6630	402	6590	384	<b>400</b>	<b>6620</b>	400	6630	402	6590

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Memory Power Management = Automatic  
Active Energy Manager = "Capping Disabled"  
Power/Performance Bias="OS Controlled"  
C1 Enhanced Mode = Disable  
C-States = Legacy  
Processor Performance States = Disable

Sysinfo program /home/shm/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on rhel7264 Fri Dec 9 19:41:28 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## HITACHI

**SPECint\_rate2006 = 6910**

BladeSymphony BS2500 (Intel Xeon E7-8890 v4)

**SPECint\_rate\_base2006 = 6660**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Dec-2016

**Hardware Availability:** Sep-2016

**Software Availability:** Mar-2016

### Platform Notes (Continued)

```

model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
 8 "physical id"s (chips)
384 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 24
  siblings  : 48
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
  physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 61440 KB

```

```

From /proc/meminfo
MemTotal:      1055958724 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

```

```

uname -a:
Linux rhel7264 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 9 00:22

SPEC is set to: /home/shm/cpu2006

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## HITACHI

SPECint\_rate2006 = 6910

BladeSymphony BS2500 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 6660

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Dec-2016

Hardware Availability: Sep-2016

Software Availability: Mar-2016

### Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	512G	8.4G	504G	2%	/home/shm

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HITACHI 11-04 08/29/2016

Memory:

30x 0x0000 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

2x 0x0003 M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

128x NO DIMM Unknown

32x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/shm/cpu2006/libs/32:/home/shm/cpu2006/libs/64:/home/shm/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Hitachi Compute Blade 520X and BladeSymphony BS2500 are electronically equivalent.

The results have been measured on a Hitachi Compute Blade 520X.

### Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

### Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint\_rate2006 = 6910**

BladeSymphony BS2500 (Intel Xeon E7-8890 v4)

**SPECint\_rate\_base2006 = 6660**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Dec-2016

**Hardware Availability:** Sep-2016

**Software Availability:** Mar-2016

## Base Portability Flags (Continued)

```

403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.aster: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

```

## Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

```

400.perlbench: icc -m64

```

```

401.bzip2: icc -m64

```

```

456.hmmer: icc -m64

```

```

458.sjeng: icc -m64

```

C++ benchmarks:

```

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## HITACHI

**SPECint\_rate2006 = 6910**

BladeSymphony BS2500 (Intel Xeon E7-8890 v4)

**SPECint\_rate\_base2006 = 6660**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Dec-2016

**Hardware Availability:** Sep-2016

**Software Availability:** Mar-2016

## Peak Portability Flags

```

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
               -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
               -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
            -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
            -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
            -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
              -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
              -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
              -ansi-alias

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**HITACHI**

**SPECint\_rate2006 = 6910**

**BladeSymphony BS2500 (Intel Xeon E7-8890 v4)**

**SPECint\_rate\_base2006 = 6660**

**CPU2006 license:** 35

**Test date:** Dec-2016

**Test sponsor:** HITACHI

**Hardware Availability:** Sep-2016

**Tested by:** HITACHI

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.7.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 28 10:52:48 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 December 2016.