



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp®_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

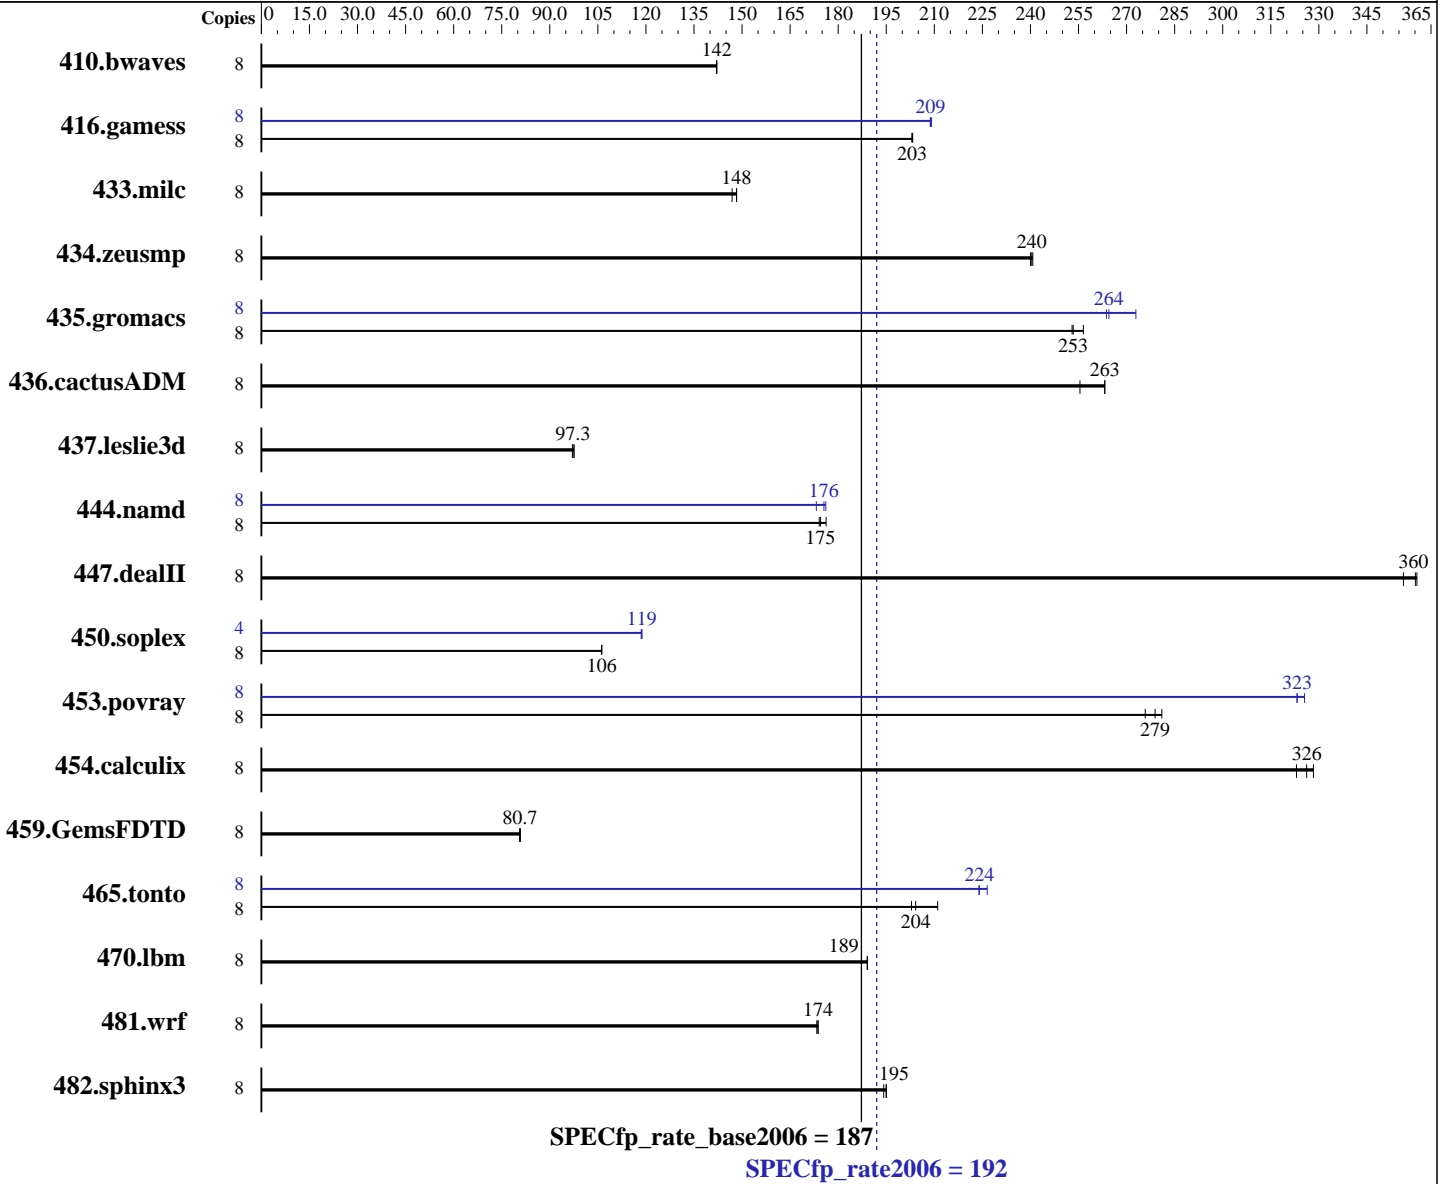

Hardware

CPU Name: Intel Xeon E3-1260L v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.2.181 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.2.181 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>765</u>	<u>142</u>	765	142	765	142	8	<u>765</u>	<u>142</u>	765	142	765	142
416.gamess	8	<u>771</u>	<u>203</u>	771	203	771	203	8	<u>750</u>	<u>209</u>	749	209	750	209
433.milc	8	500	147	495	148	<u>495</u>	<u>148</u>	8	500	147	495	148	<u>495</u>	<u>148</u>
434.zeusmp	8	302	241	<u>303</u>	<u>240</u>	303	240	8	302	241	<u>303</u>	<u>240</u>	303	240
435.gromacs	8	223	257	<u>225</u>	<u>253</u>	226	253	8	209	273	<u>216</u>	<u>264</u>	217	264
436.cactusADM	8	374	255	<u>363</u>	<u>263</u>	363	263	8	374	255	<u>363</u>	<u>263</u>	363	263
437.leslie3d	8	<u>773</u>	<u>97.3</u>	775	97.1	770	97.6	8	<u>773</u>	<u>97.3</u>	775	97.1	770	97.6
444.namd	8	369	174	364	176	<u>368</u>	<u>175</u>	8	364	176	<u>365</u>	<u>176</u>	370	173
447.dealII	8	254	361	257	356	<u>254</u>	<u>360</u>	8	254	361	257	356	<u>254</u>	<u>360</u>
450.soplex	8	628	106	<u>628</u>	<u>106</u>	629	106	4	281	119	281	119	<u>281</u>	<u>119</u>
453.povray	8	154	276	<u>153</u>	<u>279</u>	151	281	8	<u>132</u>	<u>323</u>	131	326	132	323
454.calculix	8	201	328	204	323	<u>202</u>	<u>326</u>	8	201	328	204	323	<u>202</u>	<u>326</u>
459.GemsFDTD	8	1050	80.8	<u>1052</u>	<u>80.7</u>	1053	80.6	8	1050	80.8	<u>1052</u>	<u>80.7</u>	1053	80.6
465.tonto	8	388	203	373	211	<u>386</u>	<u>204</u>	8	<u>351</u>	<u>224</u>	348	227	352	224
470.lbm	8	581	189	581	189	<u>581</u>	<u>189</u>	8	581	189	581	189	<u>581</u>	<u>189</u>
481.wrf	8	<u>514</u>	<u>174</u>	516	173	514	174	8	<u>514</u>	<u>174</u>	516	173	514	174
482.sphinx3	8	<u>800</u>	<u>195</u>	803	194	799	195	8	<u>800</u>	<u>195</u>	803	194	799	195

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes

BIOS Configuration:

```
Operating Modes set to Maximum Performance
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on x3250-02 Sun Nov 27 17:20:13 2016
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1260L v5 @ 2.90GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
 cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      16421272 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux x3250-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 27 08:20

SPEC is set to: /home/cpu2006-1.2-ic16.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
------------	------	------	------	-------	------	------------

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes (Continued)

```
/dev/sda3      xfs   691G  4.2G  687G   1% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO -[M3E107GUS-1.20]- 10/28/2016

Memory:

2x NO DIMM Unknown

2x Samsung M391A1G43EB1-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"
```

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB memory using RedHat EL 7.2 glibc 2.17

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
         -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
         -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll4 -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp_rate2006 = 192

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M6
(2.90 GHz, Intel Xeon E3-1260L v5)

SPECfp_rate2006 = 192

SPECfp_rate_base2006 = 187

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 28 10:52:46 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 December 2016.