



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

### SPECint®\_rate2006 = 1320

### Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

### SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

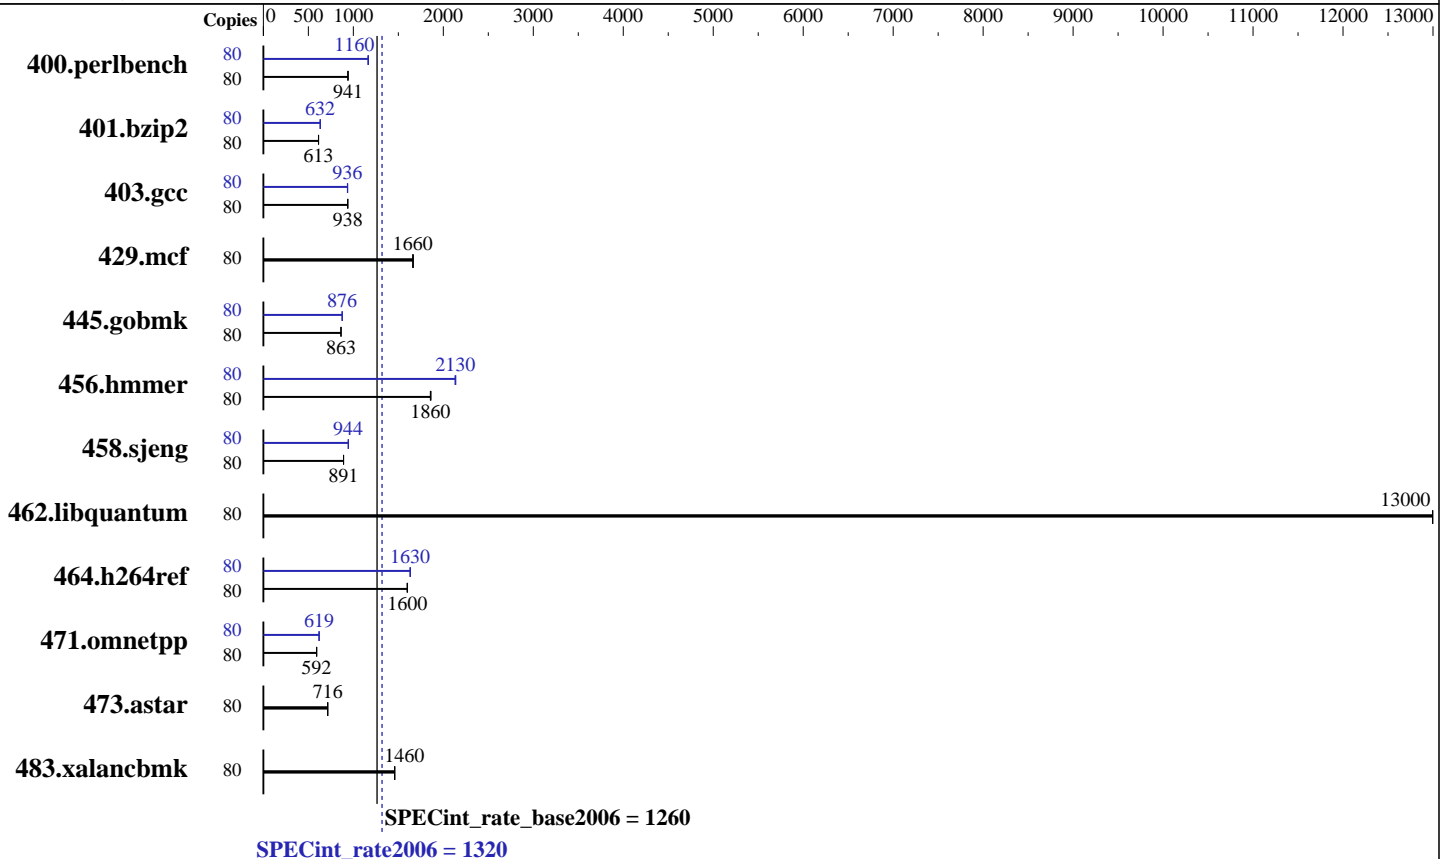

### Hardware

CPU Name: Intel Xeon E7-4820 v4  
 CPU Characteristics: 2000  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx8 PC4-2400T-R, running at 1333 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1  
 Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 1320

Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	<b>830</b>	<b>941</b>	830	942	833	938	80	672	1160	669	1170	<b>671</b>	<b>1160</b>
401.bzip2	80	<b>1258</b>	<b>613</b>	1258	613	1261	612	80	<b>1222</b>	<b>632</b>	1223	631	1220	633
403.gcc	80	686	939	687	937	<b>687</b>	<b>938</b>	80	<b>688</b>	<b>936</b>	688	937	689	934
429.mcf	80	<b>439</b>	<b>1660</b>	439	1660	438	1670	80	<b>439</b>	<b>1660</b>	439	1660	438	1670
445.gobmk	80	972	863	973	863	<b>973</b>	<b>863</b>	80	957	877	<b>958</b>	<b>876</b>	958	876
456.hammer	80	401	1860	<b>402</b>	<b>1860</b>	402	1860	80	349	2140	350	2130	<b>350</b>	<b>2130</b>
458.sjeng	80	1087	891	<b>1086</b>	<b>891</b>	1086	891	80	<b>1025</b>	<b>944</b>	1025	944	1025	944
462.libquantum	80	128	13000	<b>128</b>	<b>13000</b>	128	13000	80	128	13000	<b>128</b>	<b>13000</b>	128	13000
464.h264ref	80	1105	1600	<b>1106</b>	<b>1600</b>	1109	1600	80	<b>1084</b>	<b>1630</b>	1084	1630	1086	1630
471.omnetpp	80	<b>845</b>	<b>592</b>	845	592	844	592	80	806	620	808	619	<b>808</b>	<b>619</b>
473.astar	80	788	713	784	716	<b>784</b>	<b>716</b>	80	788	713	784	716	<b>784</b>	<b>716</b>
483.xalancbmk	80	379	1460	378	1460	<b>378</b>	<b>1460</b>	80	379	1460	378	1460	<b>378</b>	<b>1460</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Turbo mode set with:  
cpupower -c all frequency-set -g performance

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Lock\_step to disabled  
Baseboard Management Controller used to adjust the fan speed to 100%  
Set C-State to C0/C1  
Sysinfo program /home/speccpu/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-wa9f Thu Dec 15 09:45:57 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4820 v4 @ 2.00GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1320

Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

```

4 "physical id"s (chips)
80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 10
siblings : 20
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
physical 2: cores 0 1 2 3 4 8 9 10 11 12
physical 3: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB

```

```

From /proc/meminfo
MemTotal:      264360268 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

uname -a:
Linux linux-wa9f 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Dec 14 10:22

```

SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       xfs   750G  8.0G  742G   2% /home

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1320

Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISY102 11/07/2016

Memory:

32x NO DIMM NO DIMM

16x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 1333 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1320

Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1320

Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Peak Portability Flags (Continued)

483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1320

Huawei RH5885 V3 (Intel Xeon E7-4820 v4)

SPECint\_rate\_base2006 = 1260

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 11 10:34:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 January 2017.